


Double-Ended Cordsets
BCC W323-W413-3E-602-TW0334-006
Order Code: BCC0HYL

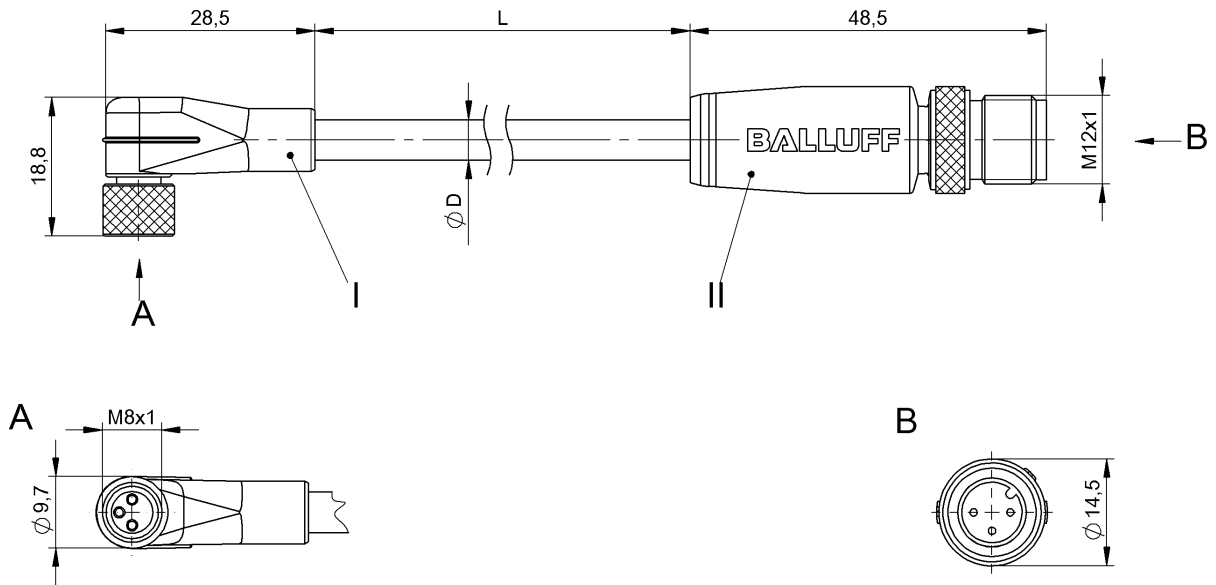

Basic features

Application	Welding area
Approval/Conformity	CE cULus WEEE

Display/Operation

Function indicator (Pin 4)	LED yellow
Power indicator	LED green/no

Electrical connection

Bending radius min., fixed cable	7.5 x D
Bending radius min., flexible cable	15 x D
Cable	FEP welding spark resistant black, 0.6 m
Cable diameter D	3.75 mm ±0.25 mm
Conductor cross-section	0.34 mm ²
Connection 1	M8x1-Female, angled, 3-pin, A- coded
Connection 2	M12x1-Male, straight, 3-pin, A- coded
Number of conductors	3
System	Molded/Molded

Electrical data

Operating voltage Ub	30 VDC
Rated current (40 °C)	4.0 A

Environmental conditions

Cable temperature, fixed routing	-100...200 °C
Connector 01, temperature max.	100 °C
IP rating	IP65/IP65

Material

Cable jacket material, note	welding spark resistant
Cable jacket, material	FEP
Material contact carrier	PUR, special/PUR, special
Material contacts	Bronze/Brass
Material cover nut	Brass PTFE coated/Brass PTFE coated
Material grip	PUR, special/PUR, special


Mechanical data

Cable jacket, color	black
Cable length L	0.60 m
Tightening torque pigtail	0.4 Nm/0.6 Nm


Remarks

Cable construction acc. to UL-AWM Style 2749
Maximum temperature at outer jacket from weld spatter/beads short-time 800°C.
Flame-retarding
Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

Connector Drawings

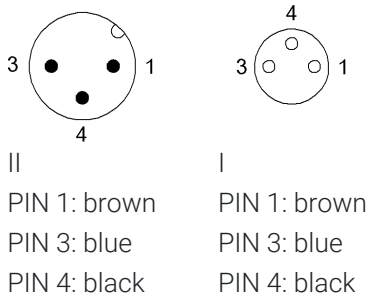

Wiring Diagrams

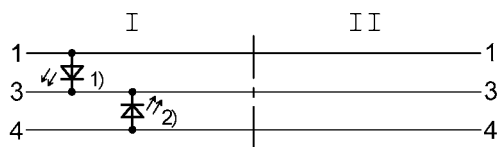

- 1) Green LED = Power
2) Yellow LED = Function