


Photoelectric Sensors
BOS 18M-PS-RH22-S4
Order Code: BOS019P

BALLUFF



1) Optical axis receiver, 2) Optical axis emitter, 3) Power/short-circuit, 4) Output function/Error, 5) Sn

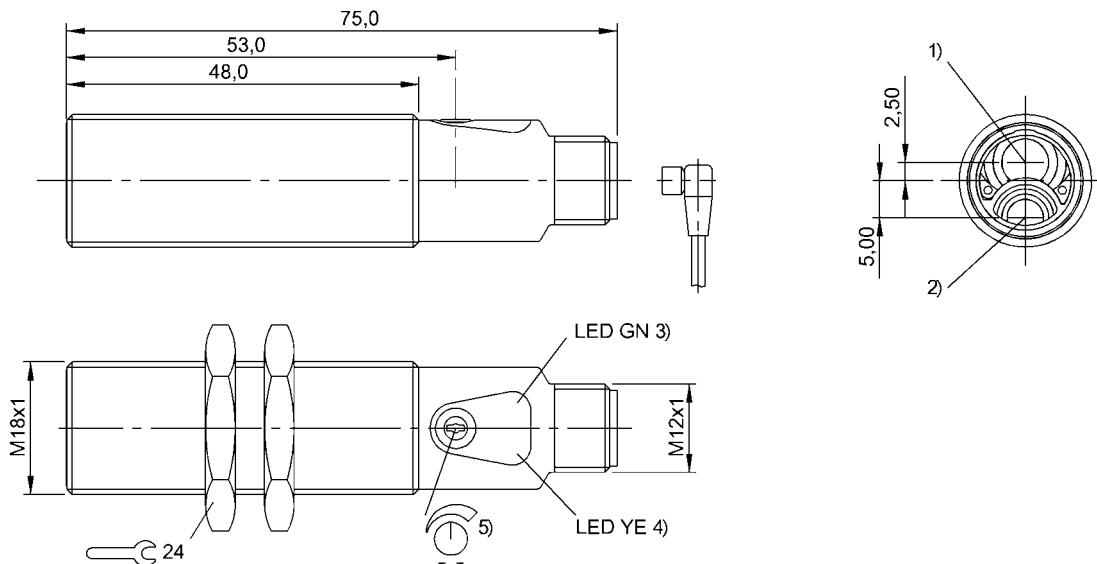

Basic features

Approval/Conformity	CE UKCA cULus WEEE
Basic standard	IEC 60947-5-2
Principle of operation	Photoelectric sensor
Series	18M
Style	Cylinder Straight optics

Display/Operation

Adjuster	10-turn potentiometer
Display	Output function- LED yellow LED green: Power Error - LED yellow, flashing Short circuit - LED green, flashing
Setting	Rated switching distance (Sn)

Electrical connection

Connection	Connector, M12x1-Male, 4-pin
Contact, surface protection	Gold plated
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	0.1 μ F
No-load current I ₀ max. at Ue	50 mA
Operating voltage U _b	10...30 VDC
Protection class	II
Rated insulation voltage U _i	75 V DC
Rated operating current I _e	100 mA
Rated operating voltage U _{e DC}	24 V
Ready delay t _v max.	200 ms
Residual current I _r max.	10 μ A
Ripple max. (% of U _e)	15 %
Switching frequency	500 Hz
Turn-off delay t _{off} max.	1 ms
Turn-on delay t _{on} max.	1 ms
Utilization category	DC-13
Voltage drop U _d max. at I _e	2.5 V

Environmental conditions

Ambient temperature	-5...55 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms, 3x6
EN 60068-2-6, Vibration	10...55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

Functional safety

MTTF (40 °C)	563 a
--------------	-------

Photoelectric Sensors
BOS 18M-PS-RH22-S4
Order Code: BOS019P

BALLUFF

Interface

Switching output PNP normally open (NO)

Material

Housing material Brass

Material sensing surface Glass

Mechanical data

Dimension Ø 18 x 75 mm

Mounting part Nut M18x1

Tightening torque max. 15 Nm
30 Nm

Optical features

Ambient light max. 10000 Lux

Beam characteristic Divergent

LED group per IEC 62471 Exempt Group

Light spot size 27 x 27 mm at 300 mm

Light type LED, red light

Principle of optical operation Diffuse sensor, triangulation

Special optical feature Background suppression

Switching function, optical Light-on

Wave length 630 nm

Range/Distance

Distance deviation 18 % max. (% of Sr) typ. 18 %

Hysteresis H max. (% of Sr) 6.0 %

Range 30...300 mm

Rated operating distance Sn 300 mm Adjustable

Repeat accuracy max. (% of Sr) 1.0 %

Remarks

Order accessories separately.

For additional information, refer to user's guide.

Only for applications per NFPA 79 (machines with a supply voltage of maximum 600 V). Use an R/C (CYJV2) cable with suitable properties for attaching the device.

Reference object (target): gray card, 100 x 100, 90 % remission, axial approach.

The sensor is functional again after the overload has been eliminated.


For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams



Opto Symbols

