


Y-Splitters

BCC W414-W425-W425-U2090-003

Order Code: BCC0J3E

BALLUFF

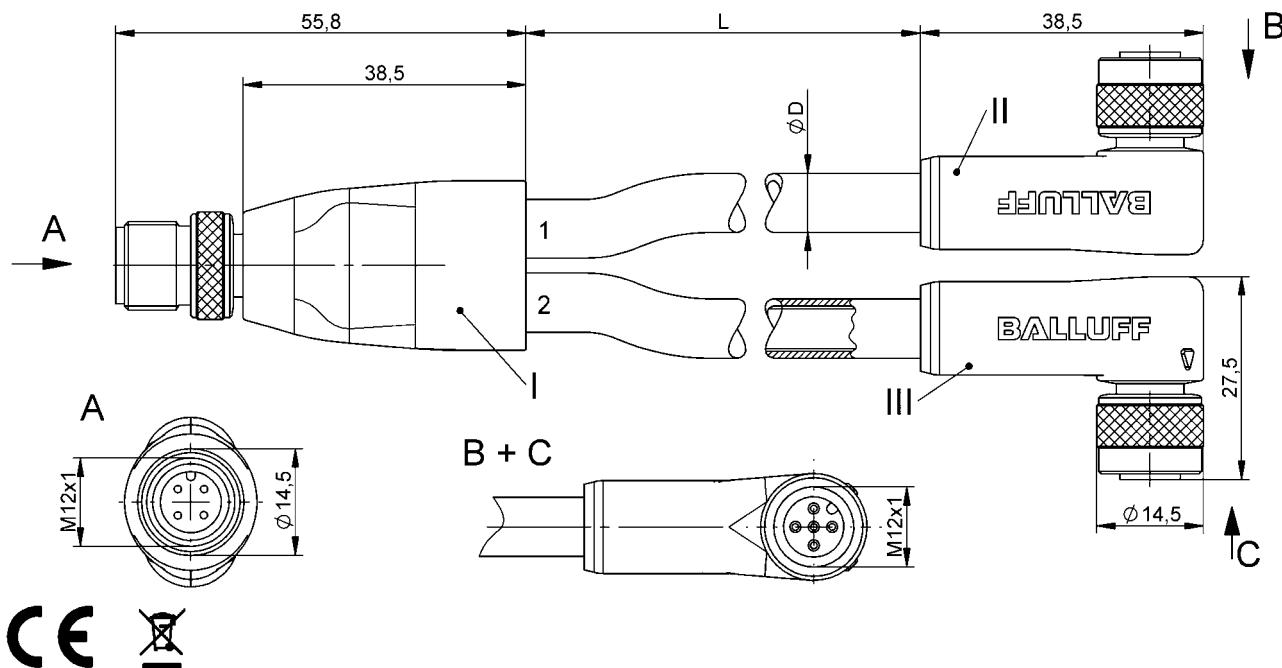

Basic features

Application	Welding area
Approval/Conformity	CE
	WFFF

Electrical connection

Bending radius min., fixed cable	5 x D
Bending radius min., flexible cable	10 x D
Cable diameter D	8.00 mm ±0.40 mm
Conductor cross-section	0.34 mm ²
Connection 1	M12x1-Male, straight, 4-pin, A-coded
Connection 2	M12x1-Female, angled, 5-pin, A-coded
Connection 3	M12x1-Female, angled, 5-pin, A-coded
Connector 01, version	straight
Connector 02, version	angled
Connector 03, version	angled
Number of conductors	4/4
Number of pins	4/5/5
Protection jacket color	Transparent
System	Molded/Molded/Molded

Electrical data

Cable rated voltage AC max.	300 V
Cable rated voltage DC max.	300 V
Operating voltage U_b	250 VDC / 250 VAC
Rated current (40 °C)	4.0 A

Environmental conditions

Cable temperature UL max., fixed routing	80 °C
Cable temperature, fixed routing	-60...200 °C
IP rating	IP67/IP67/IP67

Material

Cable jacket material, note	welding spark resistant
Cable jacket, material	TPE
Jacket material	Silicone
Material contact carrier	PUR, special/PUR, special/PUR, special
Material contacts	Brass/Bronze/Bronze
Material cover nut	Brass
	PTFE coated/Brass
	PTFE coated/Brass
	PTFE coated
Material grip	PUR, special/PUR, special/PUR, special


Mechanical data

Cable jacket, color	Yellow
Cable length L	0.30 m
Cable properties	drag chain compatible
Tightening torque pigtail	0.6 Nm/0.6 Nm/0.6 Nm

Remarks

Cable construction acc. to UL-AWM Style 20549
Flame-retarding
Maximum temperature at outer jacket from weld spatter/beads short-time 800°C.

Connector Drawings

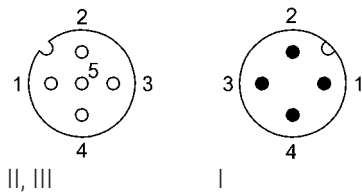

Wiring Diagrams

