


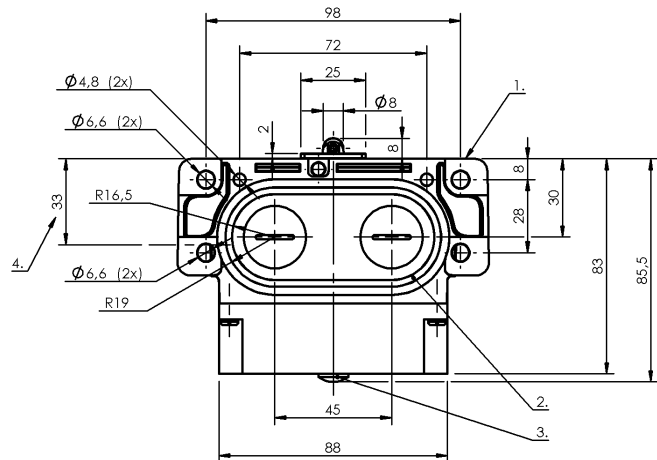

CE CCC  UKCA

Material

Housing material	Aluminium, Anodized
Housing material, surface protection	Anodized
Material contacts	1-2. Switch position: Silver 3-6. Switch position: Silver, gold plated
Plunger material	1-6. Switch position: 1.4034 stainless steel

Mechanical data

Approach direction	longitudinal, parallel to attachment surface
--------------------	--

Approach speed

Distance cam - reference edge 1-6. Switch position: 4.50...5.00 mm

Installation

Life expectancy mechanical	1-6. Switch position: 30 mil. switching operations
----------------------------	---

Number of switching positions

Plunger style	1-6th switch position: Roller
Switch actuation force	1-2. Switch position: 15 N

Switching element


3-6. Switch position: BSE 30.0

Range/Distance

Reproducibility 1-6. Switch position: ± 0.01 mm

Wiring Diagrams

BSE 61



BSE 30.0

