


Inductive Sensors
BES M30EG2-PSC10B-BV02-EXF
Order Code: BES05M5

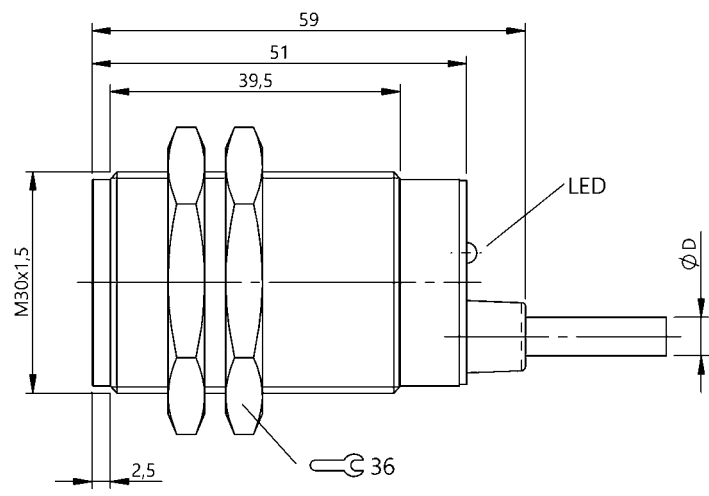

Basic features

Approval/Conformity	CE IECEX ATEX WEEE
Basic standard	EN 60079-0 EN 60079-18 IEC 60947-5-2
Ex marking	ATEX: II 3G Ex ec IIC T6 Gc II 3D Ex tc IIIC T75 °C Dc IECEX: Ex ec IIC T6 Gc Ex tc IIIC T75 °C Dc

Electrical connection

Cable length L	2 m
Conductor cross-section	0.34 mm ²
Connection type	Cable, 2 m, PUR
Polarity reversal protected	yes
Short-circuit protection	yes

Electrical data

Operating voltage U _b	10...30 VDC
Switching frequency	180 Hz

Environmental conditions

Ambient temperature	-20...60 °C
IP rating	IP67

Functional safety

MTTF (40 °C)	4110 a
--------------	--------

Interface

Switching output	PNP normally open (NO)
------------------	------------------------

Material

Housing material	Stainless steel
Material jacket	PUR
Material sensing surface	Stainless steel

Mechanical data

Dimension	Ø 30 x 59 mm
Installation	for flush mounting
Mounting length	40.00 mm
Size	M30x1.5
Tightening torque	40 Nm

Range/Distance

Rated operating distance S _n	10 mm
---	-------

Wiring Diagrams

