


Photoelectric Sensors
BFB M18M-002-P-S4
Order Code: BFB000A



1) Optical axis receiver, 2) Optical axis emitter, 3) Operating voltage, 4) Light reception/limit area, 5) Sn

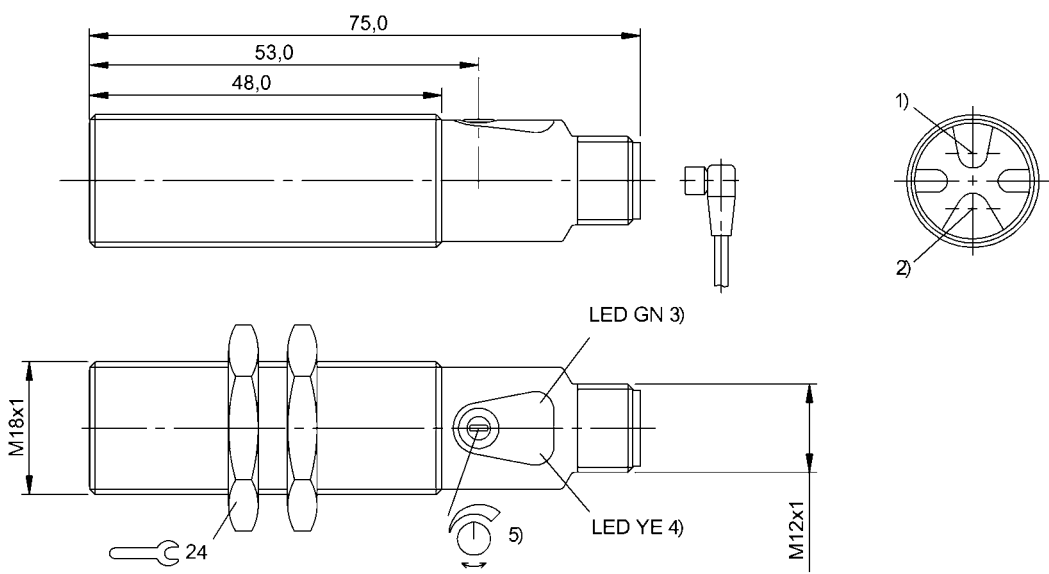

Basic features

Approval/Conformity	CE UKCA cULus WEEE
Basic standard	IEC 60947-5-2
Principle of operation	Photoelectric sensor
Series	18M
Style	Cylinder, straight optics

Display/Operation

Adjuster	Potentiometer 270°
Display	LED green: Power LED yellow: Light received Error - LED green, flashing Limit range - LED yellow, flashing
Setting	Sensitivity (Sn)

Electrical connection

Connection	Connector-Male, 4-pin
Contact, surface protection	Gold plated
Polarity reversal protected	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	0.2 µF
No-load current I _o max. at Ue	30 mA
Operating voltage U _b	10...30 VDC
Rated insulation voltage U _i	75 V DC
Rated operating current I _e	100 mA
Rated operating voltage U _e DC	24.0 V
Ready delay t _v max.	19 ms
Ripple max. (% of U _e)	15 %
Switching frequency	3000 Hz
Turn-off delay t _{off} max.	0.16 ms
Turn-on delay t _{on} max.	0.16 ms
Utilization category	DC -13
Voltage drop U _d max. at I _e	1.5 V

Environmental conditions

Ambient temperature	-5...55 °C
Ambient temperature max.	55 °C 65 °C for operating by small U _b
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms, 3x6 Half-sinus, 100 g _n , 2 ms, 3x8000
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min 10...2000 Hz, amplitude 1 mm, 30 g _n , 3x5 h
IP rating	IP67

Functional safety

MTTF (40 °C)	81 a
--------------	------

Interface

Switching output	2x PNP normally open/normally closed (NO/NC)
------------------	--

Material

Housing material	Brass, nickel-plated
Material sensing surface	PMMA
Surface protection	nickel-plated

Mechanical data

Dimension	Ø 18 x 75 mm
Mounting part	Nut M18x1
Tightening torque max.	15 Nm 30 Nm

Optical features

Ambient light max.	10000 Lux
LED group per IEC 62471	Exempt Group
Light type	LED, red light
Principle of optical operation	depends on fiber optics
Switching function, optical	Light/dark switching
Wave length	626 nm

Range/Distance

Hysteresis H max. (% of Sr)	10 %
Range	depends on fiber optics
Temperature drift max. (% of Sr)	5 %

Remarks

The sensor is functional again after the overload has been eliminated.

For additional information, refer to user's guide.

Order accessories separately.


For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings




Wiring Diagrams



Photoelectric Sensors
BFB M18M-002-P-S4
Order Code: BFB000A



Technical Drawings

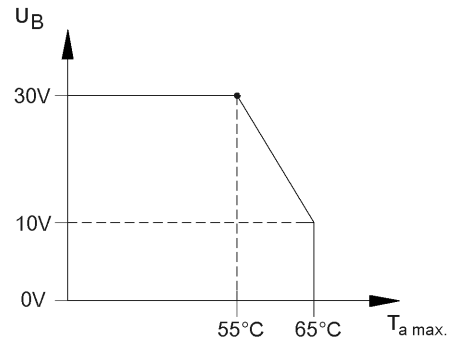

Opto Symbols

