


Photoelectric Sensors  
BOS 12M-NA-RF10-S4  
Order Code: BOS01UP

**BALLUFF**



1) Optical axis receiver, 2) Optical axis emitter, 3) Operating voltage/Error, 4) Light reception/limit area

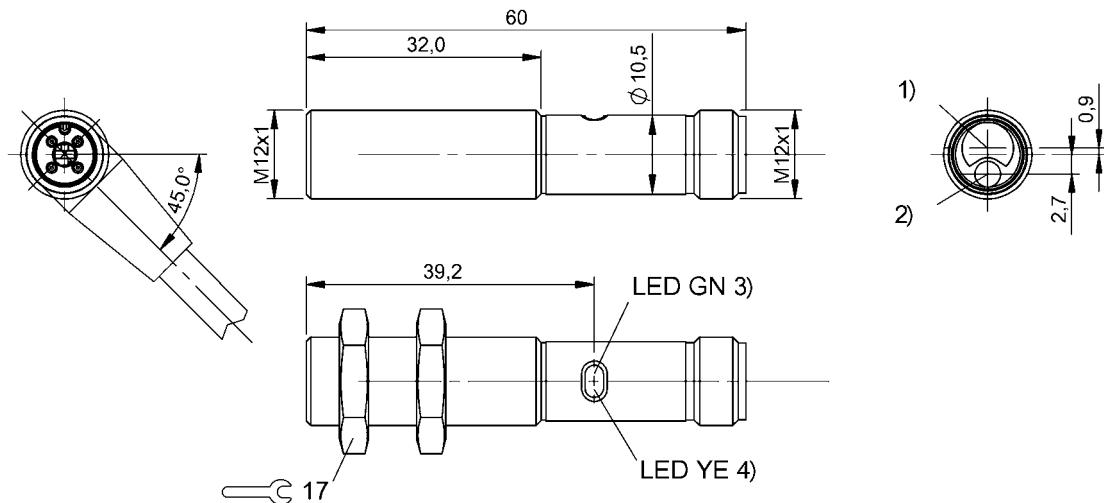

#### Basic features

Approval/Conformity	CE UKCA cULus WEEE
Basic standard	IEC 60947-5-2
Principle of operation	Photoelectric sensor
Series	12M
Style	Cylinder Straight optics

#### Display/Operation

Adjuster	no
Display	LED green: Power Error - LED green, flashing Limit range - LED yellow, flashing LED yellow: Light received

#### Electrical connection

Connection	Connector, M12x1-Male, 4-pin
Contact, surface protection	Gold plated
Polarity reversal protected	yes
Short-circuit protection	yes

#### Electrical data

Load capacitance max. at Ue	0.2 $\mu$ F
No-load current I <sub>0</sub> max. at Ue	20 mA
Operating voltage U <sub>b</sub>	10...30 VDC
Rated operating current I <sub>e</sub>	100 mA
Rated operating voltage Ue DC	24 V
Ripple max. (% of Ue)	15 %
Switching frequency	1000 Hz
Turn-off delay toff max.	0.5 ms
Turn-on delay ton max.	0.5 ms
Utilization category	DC-13
Voltage drop U <sub>d</sub> max. at I <sub>e</sub>	1.5 V

#### Environmental conditions

Ambient temperature	-5...60 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms, 3x6
EN 60068-2-6, Vibration	Half-sinus, 100 gn, 2 ms, 3x8000 10...55 Hz, amplitude 1 mm, 3x30 min
	10...2000 Hz, amplitude 1 mm, 30 gn, 3x5 h
IP rating	IP67

#### Functional safety

MTTF (40 °C)	1561 a
--------------	--------

Photoelectric Sensors  
**BOS 12M-NA-RF10-S4**  
Order Code: BOS01UP

**BALLUFF**

Interface

Switching output	NPN normally closed (NC) NPN normally open (NO) Pins 4-2
------------------	---

Material

Housing material	Brass, nickel-plated
Material sensing surface	PMMA
Surface protection	nickel-plated

Mechanical data

Dimension	Ø 12 x 60 mm
Distance deviation 6 % max. (% of Sr)	5.0 %
Mounting part	Nut M12x1
Tightening torque max.	7 Nm 15 Nm

Optical features

Ambient light max.	50000 Lux
Beam characteristic	Focus, typical at 25 mm
LED group per IEC 62471	Exempt Group
Light spot size	Ø 2 mm at 25 mm
Light type	Red light
Principle of optical operation	Diffuse sensor, triangulation
Smallest part typ.	Ø 0.05 mm wire
Special optical feature	Fixed focus Fixed background suppression
Switching function, optical	Light-on dark-on
Wave length	650 nm

Range/Distance

Distance deviation 18 % max. (% of Sr)	1 %
Hysteresis H max. (% of Sr)	1.0 %
Range	1...25 mm
Rated operating distance Sn	25 mm
Repeat accuracy max. (% of Sr)	1.0 %
Temperature drift max. (% of Sr)	5 %

Remarks

Order accessories separately.

For additional information, refer to user's guide.

Only for applications per NFPA 79 (machines with a supply voltage of maximum 600 V). Use an R/C (CYJV2) cable with suitable properties for attaching the device.

Reference object (target): gray card, 100 x 100, 90 % remission, axial approach.

The sensor is functional again after the overload has been eliminated.


For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams



Photoelectric Sensors  
BOS 12M-NA-RF10-S4  
Order Code: BOS01UP

**BALLUFF**

Opto Symbols

