


Bulk Cables
BCC 0000-0000-00-001-PX0314-10X
Order Code: BCC0KNU

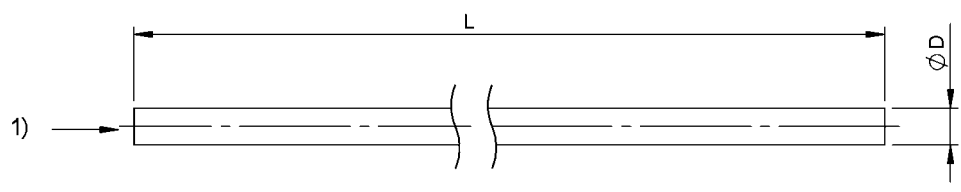

1) from cable drum

Electrical connection	
Bending radius min., fixed cable	5 x D
Bending radius min., flexible cable	12 x D
Cable	PUR black, 100 m, drag chain compatible
Cable diameter D	3.10 mm ±0.10 mm
Cable, bending cycles min.	1 mil.
Conductor cross-section	0.14 mm²
Number of conductors	3

Environmental conditions	
Cable temperature, fixed routing	-25...80 °C
Cable temperature, flexible routing	-5...80 °C


Material	
Cable jacket, material	PUR

Mechanical data	
Acceleration max., drag chain	2 m/s²
Cable jacket, color	black
Cable length L	100.00 m
Cable properties	drag chain compatible
Horizontal travel permitted, drag chain	3 m
Traverse speed max., drag chain	50 m/min

Remarks

Halogen-free

Connector Drawings



Conductor diagram
Conductor 1: brown
Conductor 2: blue
Conductor 3: black