


Bulk Cables  
BCC 0000-0000-00-003-MW8434-500  
Order Code: BCC0KR3

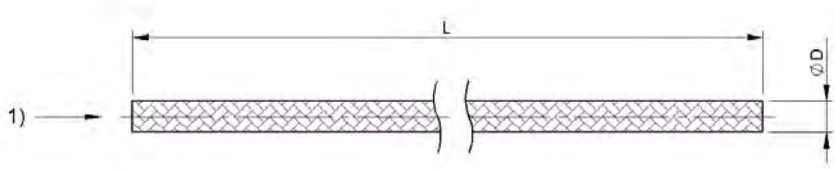

1) from cable drum

Basic features

|             |                               |
|-------------|-------------------------------|
| Application | very good mechanical strength |
|-------------|-------------------------------|

Electrical connection

|                                     |                      |
|-------------------------------------|----------------------|
| Bending radius min., fixed cable    | 5 x D                |
| Bending radius min., flexible cable | 10 x D               |
| Cable                               | PUR black            |
| Cable diameter D                    | 5.10 mm ±0.20 mm     |
| Conductor cross-section             | 0.34 mm <sup>2</sup> |
| Number of conductors                | 4                    |
| Protection jacket color             | silver               |

Environmental conditions

|                                             |             |
|---------------------------------------------|-------------|
| Cable temperature UL max., fixed routing    | 80 °C       |
| Cable temperature UL max., flexible routing | 80 °C       |
| Cable temperature, fixed routing            | -50...90 °C |
| Cable temperature, flexible routing         | -25...90 °C |

Material

|                        |     |
|------------------------|-----|
| Cable jacket, material | PUR |
| Jacket material        | V2A |


Mechanical data

|                     |       |
|---------------------|-------|
| Cable jacket, color | black |
|---------------------|-------|

Remarks

Cable construction acc. to UL-AWM Style 20549  
Halogen-free per DIN VDE 0472 Part 815  
Flame resistance per UL FT2

## Connector Drawings



Conductor diagram

Conductor 1: brown

Conductor 2: white

Conductor 3: blue

Conductor 4: black