


Photoelectric Sensors
BOS 6K-PU-RE10-PU-03
Order Code: BOS027K



1) Output function, 2) Operating voltage, 3) Sensitivity, light/dark, 4) Optical axis

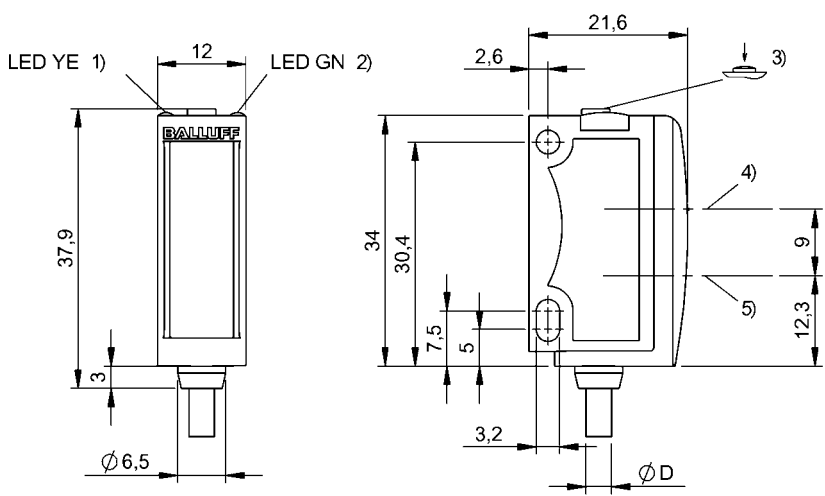

Basic features

Approval/Conformity	cULus CE Ecolab WEEE
Basic standard	IEC 60947-5-2
Principle of operation	Photoelectric sensor
Reference emitter	BOS 6K-..RS10-..
Series	6K
Style	Square Connection 90°

Display/Operation

Adjuster	button
Display	Output function- LED yellow LED green: Power
Setting	Sensitivity (Sn) Light-on/dark-on Teach mode Stand./Dyn.

Electrical connection

Cable diameter D	3.50 mm
Cable length L	3 m
Conductor cross-section	0.14 mm²
Connection	Cable, 3.00 m, TPU
Number of conductors	4
Polarity reversal protected	yes
Short-circuit protection	yes

Electrical data

Input function	Key disable on/off Same function as button
No-load current I _o max. at U _e	30 mA
Operating voltage U _b	10...30 VDC
Protection class	II
Rated operating current I _e	100 mA
Rated operating voltage U _e DC	24 V
Ripple max. (% of U _e)	12 %
Switching frequency	1000 Hz
Turn-off delay t _{off} max.	0.5 ms
Turn-on delay t _{on} max.	0.5 ms
Voltage drop U _d max. at I _e	2.4 V

Environmental conditions

Ambient temperature	-20...60 °C
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms, 3x6
EN 60068-2-6, Vibration	10...55 Hz, amplitude 0.5 mm, 3x30 min
IP rating	IP67
IP rating per DIN 40050	IP69K

Functional safety

MTTF (40 °C)	504 a
--------------	-------

Interface

Switching output	PNP normally open/normally closed (NO/NC)
------------------	---

Material

Housing material	ABS
Material jacket	TPU
Material sensing surface	PMMA

Mechanical data

Dimension	12 x 37.9 x 21 mm
Mounting part	Screw M3

Optical features

Ambient light max.	5000 Lux
Light type	LED, red light
Principle of optical operation	Through-beam sensor (receiver)
Switching function, optical	dark-on/light-on

Range/Distance

Range	0...13 m
Rated operating distance Sn	13 m Adjustable

Remarks

The sensor is functional again after the overload has been eliminated.

Actuation object (target): gray card, 200 x 200, lateral approach.

For additional information, refer to user's guide.

Order accessories separately.


Do not press key using a pointed tool.

When using as a UL product the ambient temperature Ta max. must not exceed 50°C.

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Wiring Diagrams



Opto Symbols

