


Photoelectric Sensors
BOS 18M-PA-LE20-S4S
Order Code: BOS01UU



1) Optical axis, 2) Operating voltage/Error, 3) Sn, 4) Light reception/limit area

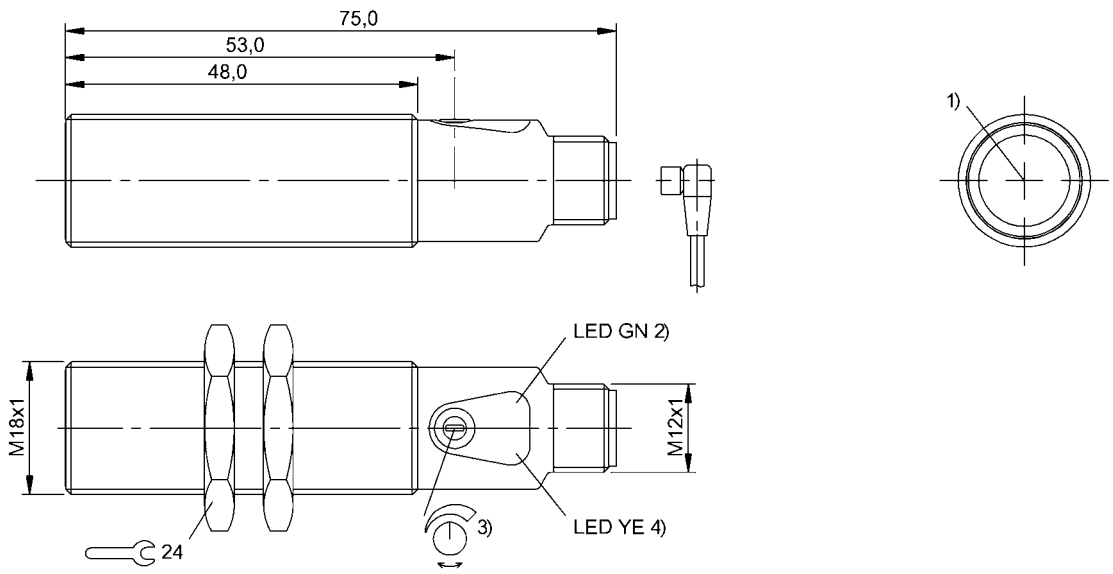

Basic features

Approval/Conformity	cULus CE UKCA WEEE
Basic standard	IEC 60947-5-2
Principle of operation	Photoelectric sensor
Reference emitter	BOS 18M-..-LS20-..
Series	18M
Style	Cylinder Straight optics

Display/Operation

Adjuster	Potentiometer 270°
Display	LED green: Power Error - LED green, flashing Limit range - LED yellow, flashing LED yellow: Light received
Setting	Sensitivity (Sn)

Electrical connection

Connection	Connector, M12x1-Male, 4-pin
Contact, surface protection	Gold plated
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	0.1 µF
No-load current Io max. at Ue	12 mA
Operating voltage Ub	10...30 VDC
Protection class	II
Rated insulation voltage Ui	75 V DC
Rated operating current Ie	100 mA
Rated operating voltage Ue DC	24 V
Ready delay tv max.	20 ms
Ripple max. (% of Ue)	15 %
Switching frequency	1000 Hz
Turn-off delay toff max.	0.5 ms
Turn-on delay ton max.	0.5 ms
Voltage drop Ud max. at Ie	1.5 V

Environmental conditions

Ambient temperature	-5...55 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms, 3x6
EN 60068-2-6, Vibration	10...55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

Functional safety

MTTF (40 °C)	1208 a
--------------	--------

Interface

Switching output	PNP normally closed (NC) PNP normally open (NO) Pins 2-4
------------------	---

Material

Housing material	Brass, nickel-plated
Material sensing surface	Glass
Surface protection	nickel-plated

Mechanical data

Dimension	Ø 18 x 75 mm
Mounting part	Nut M18x1
Tightening torque max.	15 Nm 30 Nm

Optical features

Ambient light max.	10000 Lux
Light type	Laser red light
Principle of optical operation	Through-beam sensor (receiver)
Smallest part typ.	Ø 0.2 mm at 1.5 m. R0 = 5 m
Switching function, optical	Light-on dark-on

Range/Distance

Range	0...60 m
Rated operating distance Sn	60 m Adjustable

Remarks

The sensor is functional again after the overload has been eliminated.

For additional information, refer to user's guide.

Order accessories separately.


For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams




Photoelectric Sensors
BOS 18M-PA-LE20-S4S
Order Code: BOS01UU




Technical Drawings


Small part detection

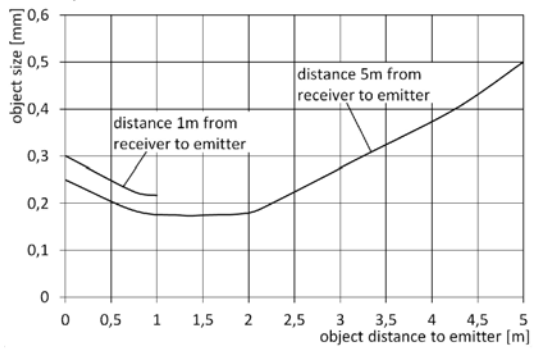

Excess gain

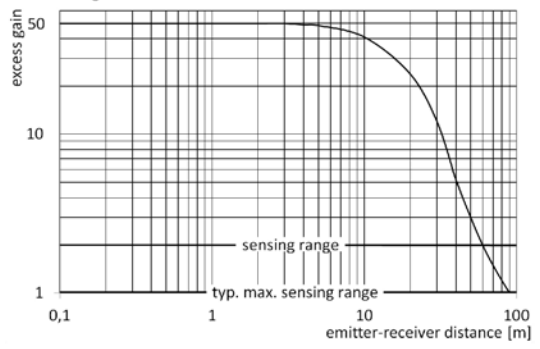

Sensing area for lateral approach

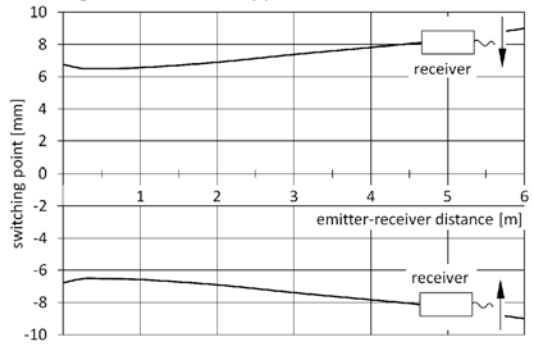

Opto Symbols

