




1) Optical axis emitter, 2) Optical axis receiver, 3) Output function

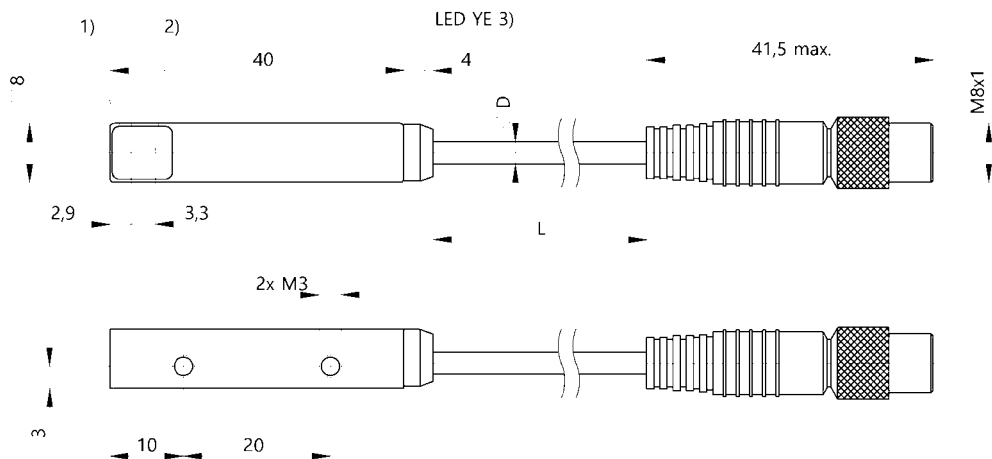

Basic features

Approval/Conformity	cULus CE WEEE
Basic standard	IEC 60947-5-2
Principle of operation	Photoelectric sensor
Series	Q08M
Style	Square Connection 90°

Display/Operation

Display	Limit range - LED yellow, flashing LED yellow: Light received
---------	--

Electrical connection

Cable diameter D	3.00 mm
Cable length L	0.2 m
Connection	Cable with connector, M8x1-Male, 3-pin, 0.20 m, PUR
Contact, surface protection	Gold plated
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	0.05 µF
No-load current Io max. at Ue	10 mA
Operating voltage Ub	10...30 VDC
Output resistance Ra	33.0 kOhm
Rated insulation voltage Ui	75 V DC
Rated operating current Ie	100 mA
Rated operating voltage Ue DC	24 V
Ready delay tv max.	150 ms
Residual current Ir max.	50 µA
Ripple max. (% of Ue)	10 %
Switching frequency	500 Hz
Turn-off delay toff max.	1 ms
Turn-on delay ton max.	1 ms
Utilization category	DC -13
Voltage drop Ud max. at Ie	0.7 V

Environmental conditions

Ambient temperature	-5...55 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 100 gn, 2 ms, 3x8000 Half-sinus, 30 gn, 11 ms, 3x6
EN 60068-2-6, Vibration	10...55 Hz, amplitude 1 mm, 3x30 min 10...2000 Hz, amplitude 1 mm, 30 gn, 3x5 h
IP rating	IP67

Functional safety

MTTF (40 °C)	1619 a
--------------	--------

Interface

Switching output	PNP normally open (NO)
------------------	------------------------

Material

Housing material	Zinc, Die casting, nickel-plated
Material jacket	PUR
Material sensing surface	PMMA
Surface protection	nickel-plated

Mechanical data

Dimension	8 x 44 x 8 mm
Mounting part	Screw M3

Optical features

Ambient light max.	5000 Lux
Average power Po max.	390 µW
Beam characteristic	Collimated
Laser class per IEC 60825-1	1
Light spot size	Ø 3.0 mm Light exit
Light type	Laser red light
Principle of optical operation	Diffuse sensor, energetic
Pulse duration t max.	5.0 µs
Pulse frequency	8 kHz
Pulse power Pp max.	2.2 mW
Switching function, optical	Light-on
Wave length	655 nm


Range/Distance

Range	60 mm
Rated operating distance Sn	60 mm

Connector Drawings




Wiring Diagrams



Opto Symbols



Warning Symbols



LASER CLASS 1 per IEC 60825-1