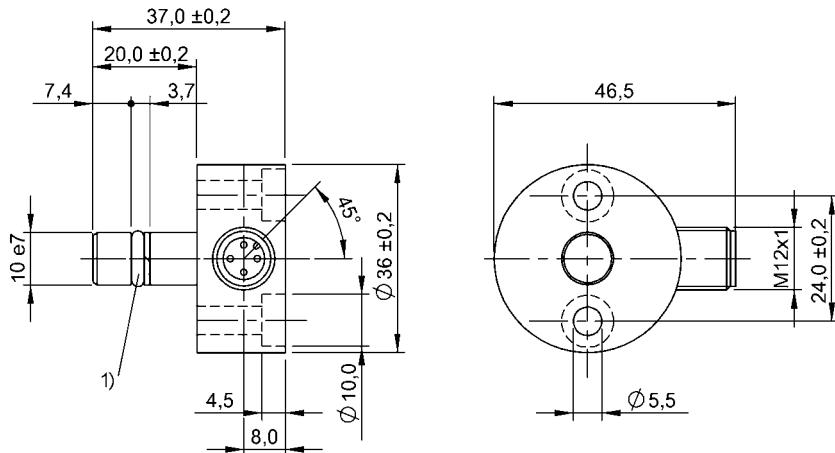


Inductive Sensors

BES 516-300-S260-S4-D

Order Code: BHS0030

**BALLUFF**

1) O-Ring with thrust ring

**Basic features**

Approval/Conformity	CE UKCA WEEE
Basic standard	IEC 60947-5-2

**Display/Operation**

Function indicator	no
Power indicator	no

**Electrical connection**

Connection	M12x1-Male, 4-pin, A-coded
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

**Electrical data**

Load capacitance max. at Ue	1 µF
Min. operating current I <sub>m</sub>	0 mA
No-load current I <sub>o</sub> max., damped	8 mA
No-load current I <sub>o</sub> max., undamped	3 mA
Operating voltage U <sub>b</sub>	10...30 VDC
Output resistance R <sub>a</sub>	150.0 kOhm
Rated insulation voltage U <sub>i</sub>	75 V DC
Rated operating current I <sub>e</sub>	200 mA
Rated operating voltage U <sub>e</sub> DC	24 V
Rated short circuit current	100 A
Ready delay t <sub>v</sub> max.	50 ms
Residual current I <sub>r</sub> max.	10 µA
Ripple max. (% of U <sub>e</sub> )	15 %
Switching frequency	2000 Hz
Utilization category	DC-13
Voltage drop static max.	2.1 V

**Environmental conditions**

Ambient temperature	-25...80 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g <sub>n</sub> , 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP68

**Functional safety**

MTTF (40 °C)	855 a
--------------	-------

Interface

Switching output PNP normally open (NO)

Material

Housing material Stainless steel  
Material sensing surface EP  
Support ring material PTFE

Range/Distance

Assured operating distance Sa	1.2 mm
Hysteresis H max. (% of Sr)	15.0 %
Rated operating distance Sn	1.5 mm
Real switching distance sr	1.5 mm
Repeat accuracy max. (% of Sr)	5.0 %
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	±10 %

Mechanical data

Dimension Ø 10 x 37 mm  
Installation for flush mounting  
Mounting length 20.00 mm  
Mounting part 2x cylinder head screw ISO 4762  
M5x25  
Pressure rating max. 350 bar  
Pressure rating, note oil pressure rated  
Sealing ring, size 5.85 x 2.4 mm  
Size D10.0

Remarks

Installation Instructions 614804

The sensor is functional again after the overload has been eliminated.

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams

