


Photoelectric Sensors
BOS 18M-PS-ID23-S4
Order Code: BOS01HL

BALLUFF



1) Optical axis receiver, 2) Optical axis emitter, 3) Operating voltage, 4) Light reception/limit area

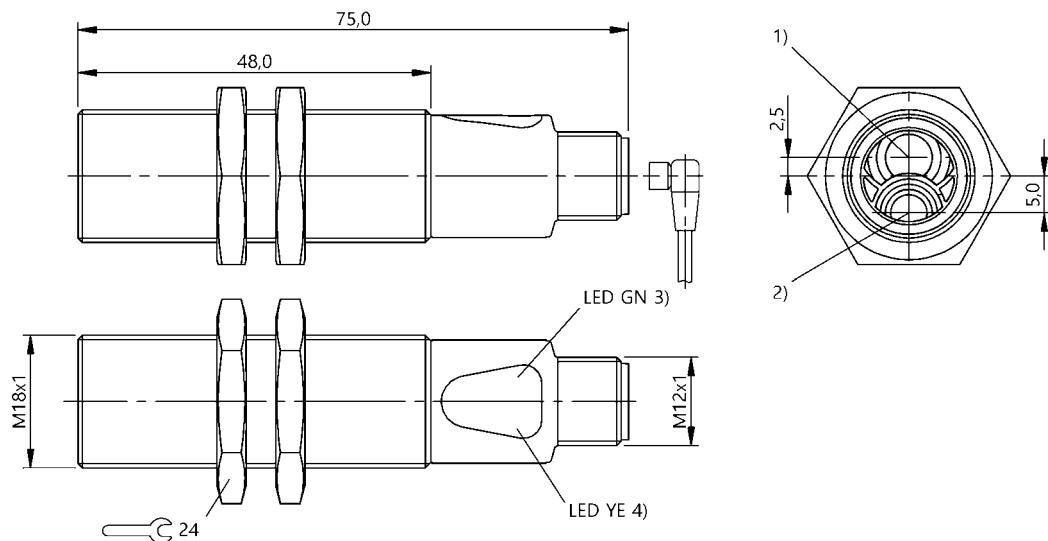

Basic features

| | |
|------------------------|-----------------------------|
| Approval/Conformity | CE UKCA cULus WEEE |
| Basic standard | IEC 60947-5-2 |
| Principle of operation | Photoelectric sensor |
| Scope of delivery | 2x nut M18x1 User manual |
| Series | 18M |
| Style | Cylinder Straight optics |

Display/Operation

| | |
|----------|---|
| Adjuster | no |
| Display | LED green: Power Error - LED green, flashing LED yellow: Light received Limit range - LED yellow, flashing |
| | |
| | |
| | |

Electrical connection

| | |
|-----------------------------------|------------------------------|
| Connection | Connector, M12x1-Male, 4-pin |
| Contact, surface protection | Gold plated |
| Polarity reversal protected | yes |
| Protection against device mix-ups | yes |
| Short-circuit protection | yes |

Electrical data

| | |
|--|-------------|
| Load capacitance max. at Ue | 0.2 μ F |
| No-load current I ₀ max. at Ue | 21 mA |
| Operating voltage U _b | 10...30 VDC |
| Protection class | II |
| Rated insulation voltage U _i | 75 V DC |
| Rated operating current I _e | 100 mA |
| Rated operating voltage U _e DC | 24 V |
| Ready delay t _v max. | 20 ms |
| Residual current I _r max. | 30 μ A |
| Ripple max. (% of U _e) | 15 % |
| Switching frequency | 800 Hz |
| Turn-off delay t _{off} max. | 0.63 ms |
| Turn-on delay t _{on} max. | 0.63 ms |
| Utilization category | DC -13 |
| Voltage drop U _d max. at I _e | 2.5 V |

Environmental conditions

| | |
|-------------------------|---|
| Ambient temperature | -5...55 °C |
| Contamination scale | 3 |
| EN 60068-2-27, Shock | Half-sinus, 30 g _n , 11 ms, 3x6 Half-sinus, 100 g _n , 2 ms, 3x8000 |
| EN 60068-2-6, Vibration | 10...55 Hz, amplitude 1 mm, 3x30 min 10...2000 Hz, amplitude 1 mm, 30 g _n , 3x5 h |
| IP rating | IP67 |

Functional safety

MTTF (40 °C) 2025 a

Interface

Switching output PNP normally open (NO) Pin 4

Material

| | |
|--------------------------------------|----------------------|
| Housing material | Brass, nickel-plated |
| Housing material, surface protection | nickel-plated |
| Material sensing surface | Glass, anti-glare |
| Surface protection | nickel-plated |

Mechanical data

| | |
|------------------------|--------------|
| Dimension | Ø 18 x 75 mm |
| Mounting part | Nut M18x1 |
| Tightening torque max. | 15 Nm |
| | 30 Nm |

Remarks

For additional information, refer to user's guide.

Reference object (target): gray card, 200 x 200, 90 % remission, axial approach.

The sensor is functional again after the overload has been eliminated.

Order accessories separately.


For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams



Opto Symbols

