


Photoelectric Sensors  
BOS 18M-PS-ID24-S4  
Order Code: BOS01J1

**BALLUFF**



1) Operating voltage, 2) Light reception

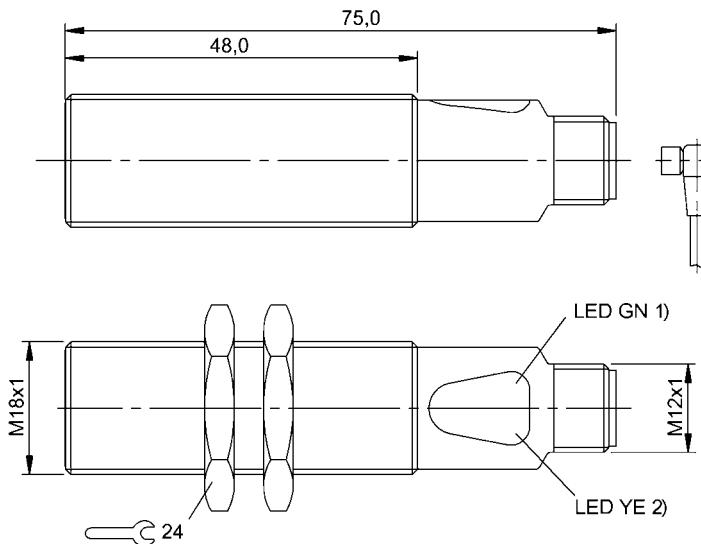

#### Basic features

Approval/Conformity	cULus CE UKCA WEEE
Basic standard	IEC 60947-5-2
Principle of operation	Photoelectric sensor
Scope of delivery	2x nut M18x1 User manual
Series	18M
Style	Cylinder Straight optics

#### Display/Operation

Adjuster	no
Display	LED green: Power Error - LED green, flashing LED yellow: Light received Limit range - LED yellow, flashing

#### Electrical connection

Connection	Connector, M12x1-Male, 4-pin
Contact, surface protection	Gold plated
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

#### Electrical data

Load capacitance max. at Ue	0.2 $\mu$ F
No-load current I <sub>0</sub> max. at Ue	30 mA
Operating voltage U <sub>b</sub>	10...30 VDC
Protection class	II
Rated insulation voltage U <sub>i</sub>	75 V DC
Rated operating current I <sub>e</sub>	100 mA
Rated operating voltage U <sub>e</sub> DC	24 V
Ready delay t <sub>v</sub> max.	20 ms
Residual current I <sub>r</sub> max.	30 $\mu$ A
Ripple max. (% of U <sub>e</sub> )	15 %
Switching frequency	200 Hz
Turn-off delay t <sub>off</sub> max.	2.5 ms
Turn-on delay t <sub>on</sub> max.	2.5 ms
Utilization category	DC -13
Voltage drop U <sub>d</sub> max. at I <sub>e</sub>	2.5 V

#### Environmental conditions

Ambient temperature	-5...55 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g <sub>n</sub> , 11 ms, 3x6 Half-sinus, 100 g <sub>n</sub> , 2 ms, 3x8000
EN 60068-2-6, Vibration	10...55 Hz, amplitude 1 mm, 3x30 min 10...2000 Hz, amplitude 1 mm, 30 g <sub>n</sub> , 3x5 h
IP rating	IP67

Photoelectric Sensors  
**BOS 18M-PS-ID24-S4**  
Order Code: BOS01J1

**BALLUFF**

Functional safety

MTTF (40 °C) 2025 a

Interface

Switching output PNP normally open (NO) Pin 4

Material

Housing material	Brass, nickel-plated
Housing material, surface protection	nickel-plated
Material sensing surface	PMMA, black
Surface protection	nickel-plated

Mechanical data

Dimension	Ø 18 x 75 mm
Mounting part	Nut M18x1
Tightening torque max.	15 Nm 30 Nm

Remarks

Order accessories separately.

For additional information, refer to user's guide.

The sensor is functional again after the overload has been eliminated.

Reference object (target): gray card, 100 x 100, 90 % remission, axial approach.


For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams



Opto Symbols

