



Mechanical Cam Switches
BNS 813-B03-D10-46-60-01
Order Code: BNS0576

BALLUFF

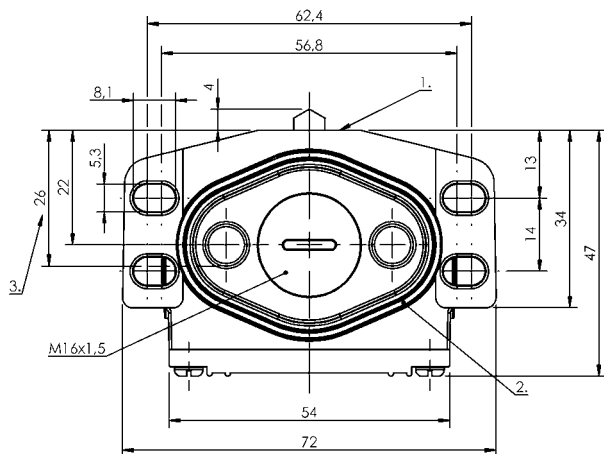

1) Reference edge, 2) Sealing ring, 3) Cable passage, 4) Mark. Safety switch position, 5) 1st pos.

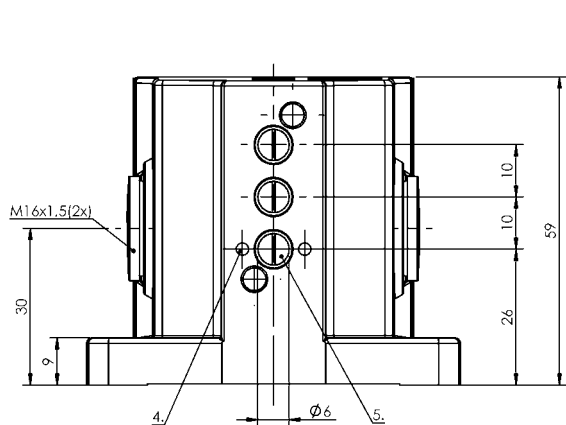

Basic features

Approval/Conformity	CE UKCA CCC WEEE
Basic standard	IEC 60947-5-1
Operating principle	1-3. Switch position: Mechanical with forced opening
Version	

Display/Operation

Function indicator	1-3. Switch position: None
--------------------	----------------------------

Electrical connection

Connection type	1-3. Switch position: Solder connection
-----------------	---

Electrical data

Continuous current	1-3. Switch position: 5 A
Rated operating voltage U _e	1-3. Switch position: 250 V AC
Switching function mechanical	NO forced-opening
Switching rate	1-3. Switch position: 200/min

Environmental conditions

Ambient temperature	-5...85 °C
IP rating	IP67

Functional safety

B10d (EN ISO 13849-1)	BSE 86: 10 mil. switching cycles BSE 69.1: 10 mil. switching cycles
-----------------------	--

Material

Housing material	Aluminium, Anodized
Housing material, surface protection	Anodized
Material contacts	1-3. Switch position: Silver
Plunger material	1-3. Switch position: 1.4034 stainless steel

Mechanical data



Approach direction	longitudinal, parallel to attachment surface
Approach speed	1-3. Switch position: 20 m/min
Distance cam - reference edge	1-3. Switch position: 2.50...2.80 mm
Flange, feed-through	1 threaded exit M16
Installation	Vertical
Life expectancy mechanical	1-3. Switch position: 10 mil. switching operations
Number of switching positions	3x Chisel Mechanical
Plunger style	1-3rd switch position: Chisel
Switch actuation force	1-3. Switch position: 8 N
Switching element	1. Switch position: BSE 86 2-3. Switch position: BSE 69.1

Range/Distance

Reproducibility	1-3. Switch position: ±0.02 mm
-----------------	--------------------------------

Wiring Diagrams

BSE 69.1



BSE 86

