


Inductive Sensors
BES G06E60-PSC20B-EP02
Order Code: BES0258



1) Sensing surface



Basic features

Approval/Conformity	CE UKCA cULus WEEE
Basic standard	IEC 60947-5-2

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Cable diameter D	2.10 mm
Cable length L	2 m
Conductor cross-section	0.073 mm ²
Connection type	Cable, 2.00 m, PUR
Number of conductors	3
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at U _e	0.2 µF
Min. operating current I _m	1 mA
No-load current I _o max., damped	9 mA
No-load current I _o max., undamped	3 mA
Operating voltage U _b	10...30 VDC
Output resistance R _a	Open collector
Rated insulation voltage U _i	75 V DC
Rated operating current I _e	150 mA
Rated operating voltage U _e DC	24 V
Rated short circuit current	100 A
Ready delay t _v max.	20 ms
Residual current I _r max.	10 µA
Ripple max. (% of U _e)	10 %
Switching frequency	3000 Hz
Utilization category	DC -13
Voltage drop static max.	2.7 V

Environmental conditions

Ambient temperature	-25...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

Functional safety

MTTF (40 °C)	830 a
--------------	-------

Inductive Sensors
BES G06E60-PSC20B-EP02
Order Code: BES0258

BALLUFF

Interface

Switching output PNP normally open (NO)

Material

Housing material Stainless steel
Material jacket PUR
Material sensing surface PBT

Mechanical data

Dimension Ø 6.5 x 6 mm
Installation for flush mounting
Size D6.5

Range/Distance


Assured operating distance Sa 1.6 mm
Hysteresis H max. (% of Sr) 15.0 %
Rated operating distance Sn 2 mm
Real switching distance sr 2 mm
Repeat accuracy max. (% of Sr) 5.0 %
Switching distance marking ■■
Temperature drift max. (% of Sr) 10 %
Tolerance Sr ±10 %

Remarks

For mounting and installation see Accessories section
Max. pull force on cable 10 N.
EMC: EMC protection circuit required, see 825345. IVW: 2.2
The sensor is functional again after the overload has been eliminated.
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.


Wiring Diagrams



Inductive Sensors
BES G06E60-PSC20B-EP02
Order Code: BES0258

BALLUFF

Help Views

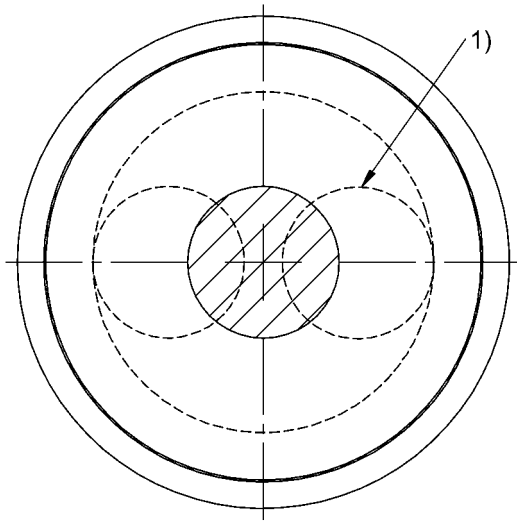

1) Cable outlet eccentric poss.