


Inductive Sensors  
BHS B400V-PSD15-S04  
Order Code: BHS0063

**BALLUFF**



1) O-Ring with thrust ring

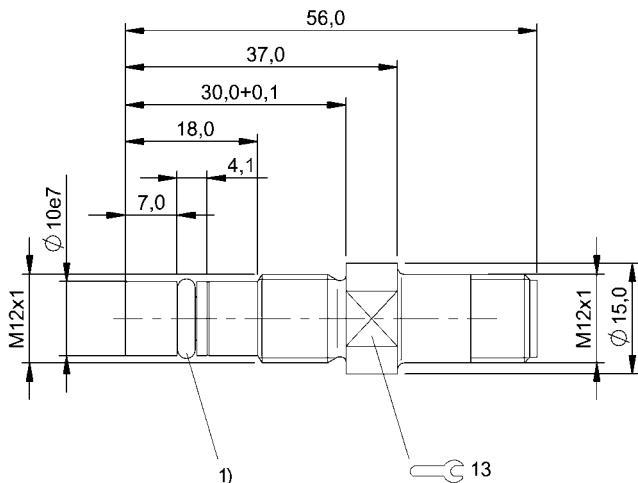

#### Basic features

Approval/Conformity	CE UKCA cULus WEEE
Basic standard	IEC 60947-5-2

#### Display/Operation

Function indicator	no
Power indicator	no

#### Electrical connection

Connection	M12x1-Male, 4-pin, A-coded
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

#### Electrical data

Load capacitance max. at Ue	0.5 $\mu$ F
Min. operating current I <sub>m</sub>	0 mA
No-load current I <sub>o</sub> max., damped	8 mA
No-load current I <sub>o</sub> max., undamped	8 mA
Operating voltage U <sub>b</sub>	10...30 VDC
Output resistance R <sub>a</sub>	33.0 kOhm + 2D
Rated insulation voltage U <sub>i</sub>	75 V DC
Rated operating current I <sub>e</sub>	200 mA
Rated operating voltage U <sub>e</sub> DC	24 V
Rated short circuit current	100 A
Ready delay t <sub>v</sub> max.	20 ms
Residual current I <sub>r</sub> max.	10 $\mu$ A
Ripple max. (% of U <sub>e</sub> )	15 %
Switching frequency	400 Hz
Utilization category	DC-13
Voltage drop static max.	2.5 V

#### Environmental conditions

Ambient temperature	-25...120 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g <sub>n</sub> , 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP68

#### Functional safety

MTTF (40 °C)	500 a
--------------	-------

#### Interface

Switching output PNP normally open (NO)

#### Material

Housing material 1.4104 stainless steel  
Material sensing surface Ceramic  
Support ring material PTFE

#### Range/Distance

Assured operating distance Sa	1.21 mm
Hysteresis H max. (% of Sr)	15.0 %
Rated operating distance Sn	1.5 mm
Real switching distance sr	1.5 mm
Repeat accuracy max. (% of Sr)	5.0 %
Temperature drift max. (% of Sr)	15 %
Tolerance Sr	±10 %

#### Mechanical data

Dimension Ø 12 x 56 mm  
Installation for flush mounting  
Mounting length 12.00 mm  
Mounting part M12x1  
Pressure rating max. 500 bar  
Pressure rating, note oil pressure rated  
Sealing ring, size 6.75 x 1.78 mm  
Size M12x1  
Tightening torque 20 Nm ±10 %

#### Remarks

The sensor is functional again after the overload has been eliminated.

Installation Instructions 614804

$I_e [mA] = 200 - 2.2x(T_a - 75)$  at  $T_a [^{\circ}C]$  +75...+120

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

#### Connector Drawings



#### Wiring Diagrams

