


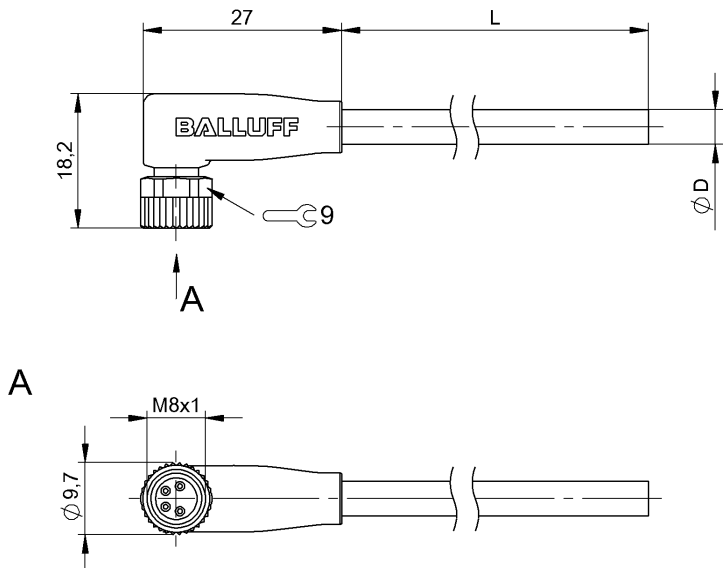

Basic features

|                     |                     |
|---------------------|---------------------|
| Approval/Conformity | CE<br>cULus<br>WEEE |
|---------------------|---------------------|

Display/Operation

|                            |            |
|----------------------------|------------|
| Function indicator (Pin 4) | LED yellow |
| Power indicator            | Green LED  |

Electrical connection

|                                     |                                        |
|-------------------------------------|----------------------------------------|
| Bending radius min., fixed cable    | 5 x D                                  |
| Bending radius min., flexible cable | 10 x D                                 |
| Cable                               | PUR black, 10 m, drag chain compatible |
| Cable diameter D                    | 4.70 mm ±0.20 mm                       |
| Cable, bending cycles min.          | 5 mil.                                 |
| Conductor cross-section             | 0.34 mm <sup>2</sup>                   |
| Connection                          | M8x1-Female, angled, 4-pin, A-coded    |
| Connector configuration             | right-angle                            |
| Number of conductors                | 4                                      |
| Number of pins                      | 4                                      |
| System                              | Molded                                 |

Electrical data

|                                  |        |
|----------------------------------|--------|
| Operating voltage U <sub>b</sub> | 30 VDC |
| Rated current (40 °C)            | 4.0 A  |

Environmental conditions

|                                             |             |
|---------------------------------------------|-------------|
| Cable temperature UL max., fixed routing    | 80 °C       |
| Cable temperature UL max., flexible routing | 80 °C       |
| Cable temperature, drag chain               | -25...60 °C |
| Cable temperature, fixed routing            | -50...90 °C |
| Cable temperature, flexible routing         | -25...90 °C |
| IP rating                                   | IP67, IP69K |

Interface

|                  |                      |
|------------------|----------------------|
| Switching output | PNP NO/NC antivalent |
|------------------|----------------------|

Material

|                          |                                      |
|--------------------------|--------------------------------------|
| Cable jacket, material   | PUR                                  |
| Material contact carrier | PUR                                  |
| Material contacts        | Bronze                               |
| Material cover nut       | Die-cast zinc or nickel plated brass |
| Material grip            | PUR                                  |

Mechanical data

|                                         |                       |
|-----------------------------------------|-----------------------|
| Acceleration max., drag chain           | 5 m/s <sup>2</sup>    |
| Cable jacket, color                     | black                 |
| Cable length L                          | 10.00 m               |
| Cable properties                        | drag chain compatible |
| Horizontal travel permitted, drag chain | 5 m                   |
| Tightening torque pigtail               | 0.4 Nm                |
| Traverse speed max., drag chain         | 200 m/min             |
| Vertical travel permitted, drag chain   | 5 m                   |

#### Remarks

Cable construction acc. to UL-AWM Style 20549


Halogen-free per DIN VDE 0472 Part 815

Silicone-free

Flame-retarding acc. to IEC 60332-2

Enclosure rating per IEC 60529 or 20653, only in screwed state with the associated mating piece.

#### Connector Drawings




PIN 1: brown

PIN 2: white

PIN 3: blue

PIN 4: black

#### Wiring Diagrams



1) Green LED = Power

2) Yellow LED = Function