


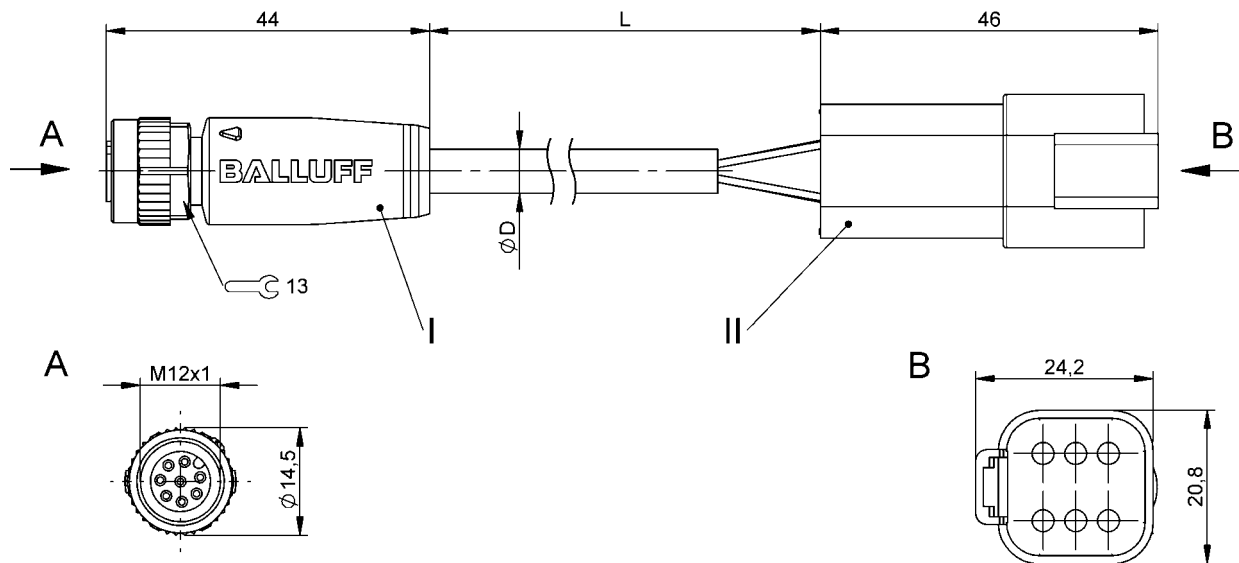

Basic features

Approval/Conformity	CE WEEE
---------------------	------------

Electrical connection

Bending radius min., fixed cable	5 x D
Bending radius min., flexible cable	10 x D
Cable	PUR Shielded black, 0.15 m, drag chain compatible
Cable diameter D	6.00 mm ±0.15 mm
Cable, bending cycles min.	2 mil.
Conductor cross-section	0.25 mm²
Connection 1	M12x1-Female, straight, 8-pin, A-coded
Connection 2	DEUTSCH DT04-Male, straight, 6-pin
Number of conductors	8
System	Molded/assembled

Electrical data

Operating voltage U _b	30 VDC / 30 VAC
Rated current (40 °C)	2.0 A

Environmental conditions

Cable temperature UL max., fixed routing	80 °C
Cable temperature UL max., flexible routing	80 °C
Cable temperature, drag chain	-25...60 °C
Cable temperature, fixed routing	-50...90 °C
Cable temperature, flexible routing	-25...90 °C
IP rating	IP67/IP67

Material

Cable jacket material, note	Shielded
Cable jacket, material	PUR
Cable shield	Copper braid, tin-plated
Material contact carrier	PUR
Material contacts	Bronze/Copper alloy
Material cover nut	Die-cast zinc
Material grip	PUR/PA 6.6


Mechanical data

Acceleration max., drag chain	5 m/s²
Cable jacket, color	black
Cable length L	0.15 m
Cable properties	drag chain compatible
Horizontal travel permitted, drag chain	5 m
Tightening torque pigtail	0.6 Nm/-
Traverse speed max., drag chain	200 m/min
Vertical travel permitted, drag chain	2 m


Remarks

Cable construction acc. to UL-AWM Style 20549
Halogen-free per DIN VDE 0472 Part 815
Silicone-free
Flame resistance per UL FT2
Enclosure rating per IEC 60529 or ISO 20653, only in screwed state with the associated mating piece.

Connector Drawings



I
PIN 1: yellow
PIN 2: gray
PIN 3: pink
PIN 4: red
PIN 5: green
PIN 6: blue
PIN 7: brown
PIN 8: white



II
PIN 1: blue
PIN 2: pink
PIN 3: brown
PIN 4: yellow
PIN 5: green
PIN 6: gray

Wiring Diagrams

