


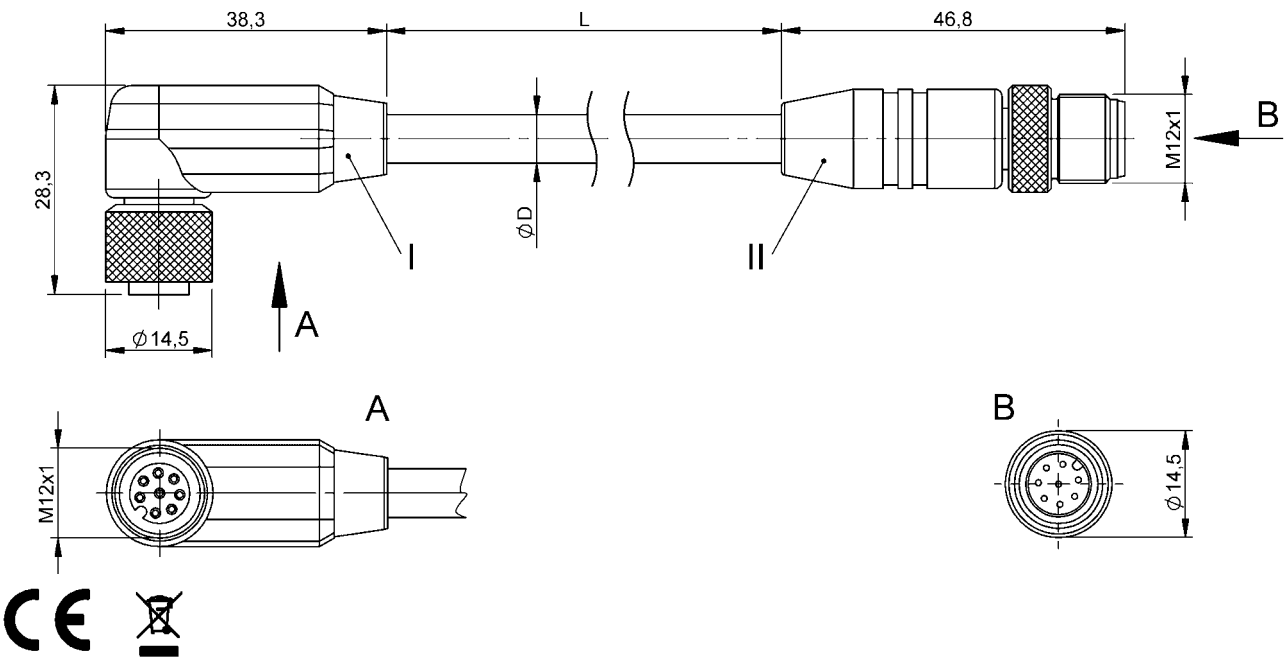

Basic features

Approval/Conformity	CE WEEE
---------------------	------------

Electrical connection

Bending radius min., fixed cable	5 x D
Bending radius min., flexible cable	15 x D
Cable	PUR Shielded black, 0.5 m, drag chain compatible
Cable diameter D	6.70 mm ±0.30 mm
Conductor cross-section	0.25 mm ²
Connection 1	M12x1-Female, angled, 8-pin, A-coded
Connection 2	M12x1-Male, straight, 8-pin, A-coded
Number of conductors	8
System	Molded/Molded

Electrical data

Conductor construction	4x2 twisted-pair
Operating voltage U _b	30 VDC / 30 VAC
Rated current (40 °C)	2.0 A
Stranding	pairs

Environmental conditions

Cable temperature UL max., fixed routing	80 °C
Cable temperature UL max., flexible routing	80 °C
Cable temperature, drag chain	-5...60 °C
Cable temperature, fixed routing	-40...90 °C
Cable temperature, flexible routing	-5...90 °C
IP rating	IP67/IP67

Material

Cable jacket material, note	Shielded
Cable jacket, material	PUR
Cable shield	Copper braid, tin-plated
Material contact carrier	PUR/PUR
Material contacts	Bronze/Brass
Material cover nut	Nickel-plated brass/Nickel-plated brass
Material grip	PUR/PUR


Mechanical data

Acceleration max., drag chain	5 m/s ²
Cable jacket, color	black
Cable length L	0.50 m
Cable properties	drag chain compatible
Horizontal travel permitted, drag chain	10 m
Tightening torque pigtail	0.6 Nm/0.6 Nm
Traverse speed max., drag chain	4.5 m/s

Remarks


Cable construction acc. to UL-AWM Style 20549
Halogen-free per DIN VDE 0472 Part 815
Flame resistance acc. to IEC 60332-1
Flame resistance per UL FT2
Oil resistant per DIN VDE 0472 Part 803
Tin plated copper braiding, optical coverage min. 85%
Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.
360° shield on cover nut

Connector Drawings



I


PIN 1: yellow
PIN 2: gray
PIN 3: pink
PIN 4: red
PIN 5: green
PIN 6: blue
PIN 7: brown
PIN 8: white



II

PIN 1: yellow
PIN 2: gray
PIN 3: pink
PIN 4: red
PIN 5: green
PIN 6: blue
PIN 7: brown
PIN 8: white

Wiring Diagrams

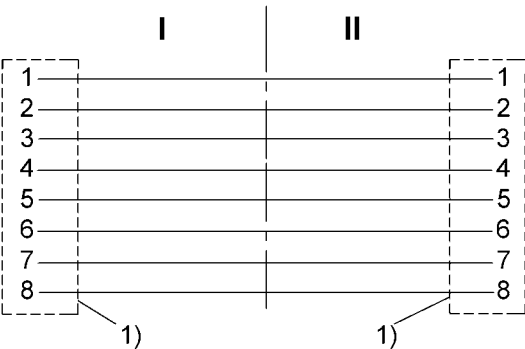

1) Shield on cover nut