


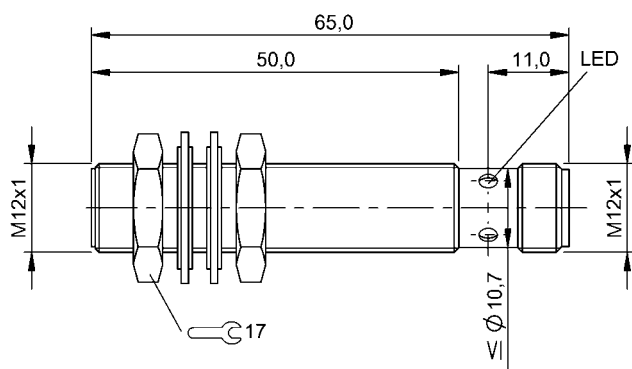

Basic features

Approval/Conformity	cULus CE UKCA WEEE
Basic standard	IEC 60947-5-2

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Connection	M12x1-Male, 4-pin, A-coded
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	1 μ F
Min. operating current Im	0 mA
No-load current Io max., damped	10 mA
No-load current Io max., undamped	5 mA
Operating voltage Ub	12...30 VDC
Output resistance Ra	33.0 kOhm + D
Rated insulation voltage Ui	75 V DC
Rated operating current Ie	200 mA
Rated operating voltage Ue DC	24 V
Rated short circuit current	100 A
Ready delay tv max.	30 ms
Residual current Ir max.	20 μ A
Ripple max. (% of Ue)	15 %
Switching frequency	1200 Hz
Utilization category	DC -13
Voltage drop static max.	2.5 V

Environmental conditions

Ambient temperature	-40...85 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP68

Interface

Switching output	PNP normally open (NO)
------------------	------------------------

Material

Housing material	Brass, Nickel-free coated
Material sensing surface	PA 12

Mechanical data

Dimension	Ø 12 x 65 mm
Installation	for flush mounting
Mounting length	50.00 mm
Size	M12x1
Tightening torque	15 Nm

Range/Distance

Assured operating distance Sa	1.6 mm
Hysteresis H max. (% of Sr)	15.0 %
Rated operating distance Sn	2 mm
Real switching distance sr	2 mm
Repeat accuracy max. (% of Sr)	5.0 %
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	±10 %

Remarks

With connector, e.g. BKS-S 20-... total length = switch length +18 mm.

Connector Drawings



Wiring Diagrams

