


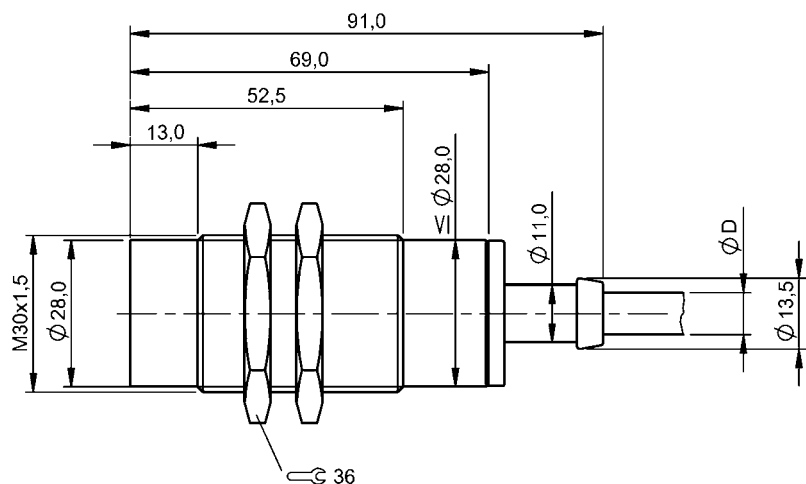

Basic features

Approval/Conformity	CE UKCA WEEE
Base type deviation	Ta
Basic standard	IEC 60947-5-2

Electrical connection

Cable diameter D	8.00 mm
Cable length L	5 m
Conductor cross-section	0.75 mm ²
Connection type	Cable, 5.00 m, Silicone
Number of conductors	4
Polarity reversal protected	yes
Protection against device mix-ups	no
Short-circuit protection	no

Electrical data

Load capacitance max. at U _e	0.15 µF
Min. operating current I _m	0 mA
No-load current I _o max., damped	15 mA
No-load current I _o max., undamped	15 mA
Operating voltage U _b	10...30 VDC
Output resistance R _a	6.2 kOhm + D/10.0 kOhm + D
Rated insulation voltage U _i	75 V DC
Rated operating current I _e	400 mA
Rated operating voltage U _e DC	24 V
Rated short circuit current	100 A
Ready delay t _v max.	10 ms
Residual current I _r max.	80 µA
Ripple max. (% of U _e)	15 %
Switching frequency	100 Hz
Utilization category	DC -13
Voltage drop static max.	1.5 V

Environmental conditions

Ambient temperature	-25...120 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67, IP60 at cable exit

Functional safety

MTTF (40 °C)	400 a
--------------	-------

Interface

Switching output	PNP normally open/normally closed (NO/NC)
------------------	---

Inductive Sensors
BES 516-125-SA1-05
Order Code: BES02HE



Material

Housing material	Brass, nickel-plated
Material jacket	Silicone
Material sensing surface	PA 12

Mechanical data

Dimension	Ø 30 x 91 mm
Installation	non-flush
Mounting length	39.50 mm
Size	M30x1.5
Tightening torque	70 Nm

Range/Distance

Assured operating distance Sa	12 mm
Hysteresis H max. (% of Sr)	15.0 %
Rated operating distance Sn	15 mm
Real switching distance sr	15 mm
Repeat accuracy max. (% of Sr)	5.0 %
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	±10 %

Remarks


Ta ≥ 70 °C... ≤ 120 °C: Ie ≤ 5...150 mA.

Recommendation: After a short circuit check the device for proper function.

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Wiring Diagrams



1) For SCP see electrical data