

Double-Ended Cordsets
BCC A315-A315-30-335-PX35A0-300
Order Code: BCC0LTZ



Basic features

Approval/Conformity	CE cULus WEEE
---------------------	---------------------

Electrical connection

Bending radius min., fixed cable	7.5 x D
Bending radius min., flexible cable	10 x D
Cable	PUR Orange, 30 m, drag chain compatible
Cable diameter D	8.00 mm $\pm$ 0.20 mm
Conductor cross-section	1.0 mm ²
Connection 1	7/8\"-Female, straight, 5-pin
Connection 2	7/8\"-Male, straight, 5-pin
Number of conductors	5
System	Molded/Molded

Electrical data

Cable rated voltage AC max.	600 V
Cable rated voltage DC max.	600 V
Operating voltage U _b	300 VDC / 300 VAC
Rated current (40 °C)	9.0 A

Environmental conditions

Cable temperature, drag chain	-30...60 °C
Cable temperature, fixed routing	-50...80 °C
Cable temperature, flexible routing	-20...80 °C
IP rating	IP67, IP68/IP67, IP68

Interface

Switching output	Complementary
------------------	---------------

Material

Cable jacket, material	PUR
Material contact carrier	PUR/PUR
Material contacts	Brass/Brass
Material cover nut	Die-cast zinc/Die-cast zinc
Material grip	PUR/PUR


Mechanical data

Acceleration max., drag chain	5 m/s ²
Cable jacket, color	Orange
Cable length L	30.00 m
Cable properties	drag chain compatible
Horizontal travel permitted, drag chain	20 m
Tightening torque pigtail	1.5 Nm/1.5 Nm
Traverse speed max., drag chain	300 m/min

Remarks

Cable construction acc. to UL-AWM Style 21223
Halogen-free acc. to IEC 60754-1
Silicone-free
UV resistant
Oil-resistant
Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

Connector Drawings

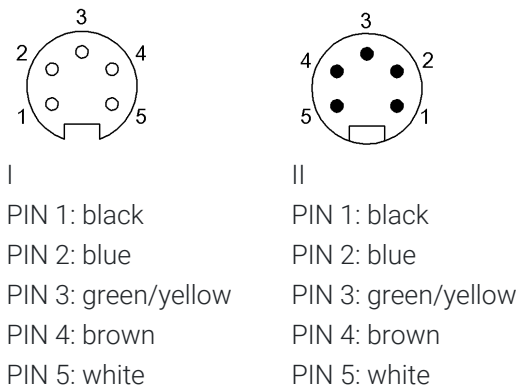

Wiring Diagrams

