


Double-Ended Cordsets
BIS C-520-PVC-05
Order Code: BCC00PJ

BALLUFF



1) Cable length see text

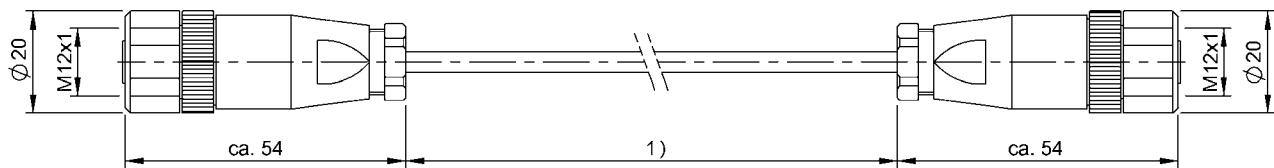

Basic features

Approval/Conformity WEEE

Electrical connection

Cable	PVC Shielded gray, 5 m
Cable diameter D	5.80 mm
Conductor cross-section	0.25 mm ²
Connection 1	M12x1-Female, straight, 5-pin, A-coded
Connection 2	M12x1-Female, straight, 5-pin, A-coded
Number of conductors	4
System	Molded/Molded

Electrical data

Operating voltage Ub	60 VDC / 60 VAC
Rated current (40 °C)	4.0 A

Remarks

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

Environmental conditions

Cable temperature, fixed routing	-30...80 °C
Cable temperature, flexible routing	-5...80 °C
IP rating	IP65

Material

Cable jacket material, note	Shielded
Cable jacket, material	PVC
Cable shield	Copper braid, tin-plated

Mechanical data

Cable jacket, color	gray
Cable length L	5.00 m
Tightening torque pigtail	0.6 Nm/0.6 Nm