


Single-Ended Cordsets
BIS C-521-PVC-02
Order Code: BCC00PK

BALLUFF



1) Cable length see text

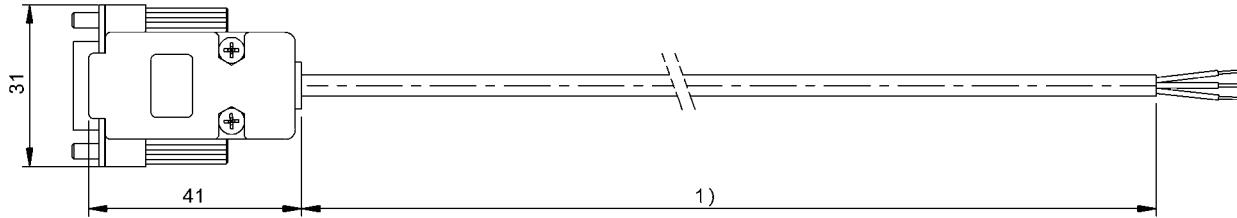

Basic features

Approval/Conformity	CE UKCA WEEE
---------------------	--------------------

Electrical connection

Cable	PVC Shielded gray, 2 m
Cable diameter D	5.80 mm
Conductor cross-section	0.25 mm ²
Connection	D-Sub-Female, straight, 9-pin
Connector configuration	Straight
Number of conductors	4
Number of pins	9

Electrical data

Operating voltage Ub	125 VDC / 125 VAC
Rated current (40 °C)	7.5 A

Environmental conditions

Cable temperature, fixed routing	-30...80 °C
Cable temperature, flexible routing	-5...80 °C
IP rating	IP40

Material

Cable jacket material, note	Shielded
Cable jacket, material	PVC

Mechanical data

Cable jacket, color	gray
Cable length L	2.00 m

Remarks

Connection cable: for internal service port RS 232 (on terminal strip) for connecting to PC.
1x MIN D female 9-pin threaded on with 3-conductor cable end incl. end ferrules
Enclosure rating per IEC 60529 or ISO 20653, only in screwed state with the associated mating piece.