


Double-Ended Cordsets
BIS C-522-PVC-03
Order Code: BCC00PM

BALLUFF



1) Cable length see text

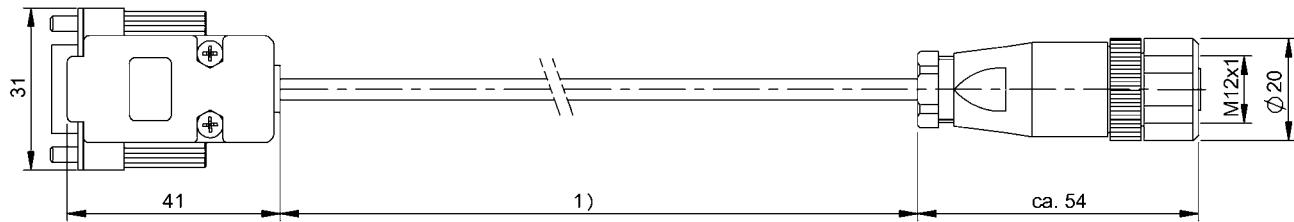

Basic features

Approval/Conformity	CE UKCA WEEE
---------------------	--------------------

Electrical connection

Cable	PVC Shielded gray, 3 m
Cable diameter D	5.80 mm
Conductor cross-section	0.25 mm ²
Connection 1	D-Sub-Female, straight
Connection 2	M12x1-Female, straight, A-coded
Number of conductors	4
System	assembled/Molded

Environmental conditions

Cable temperature, fixed routing	-30...80 °C
Cable temperature, flexible routing	-5...80 °C
IP rating	IP40, installed

Material

Cable jacket material, note	Shielded
Cable jacket, material	PVC
Cable shield	Copper braid, tin-plated

Mechanical data

Cable jacket, color	gray
Cable length L	3.00 m
Tightening torque pigtail	-/0.6 Nm

Remarks

Enclosure rating per IEC 60529 or ISO 20653, only in screwed state with the associated mating piece.
Connection cable: for external service port RS 232 (with panel connector 4-pin) for connecting to PC
1x MIN D female 9-pin threaded on with 1x M12 coupling 4-pin threaded on