


Photoelectric Sensors
BOD 21M-LB04-S92
Order Code: BOD000T

BALLUFF



1) Optical axis receiver, 2) Optical axis emitter, 3) Display and control panel, 4) rotatable 270°

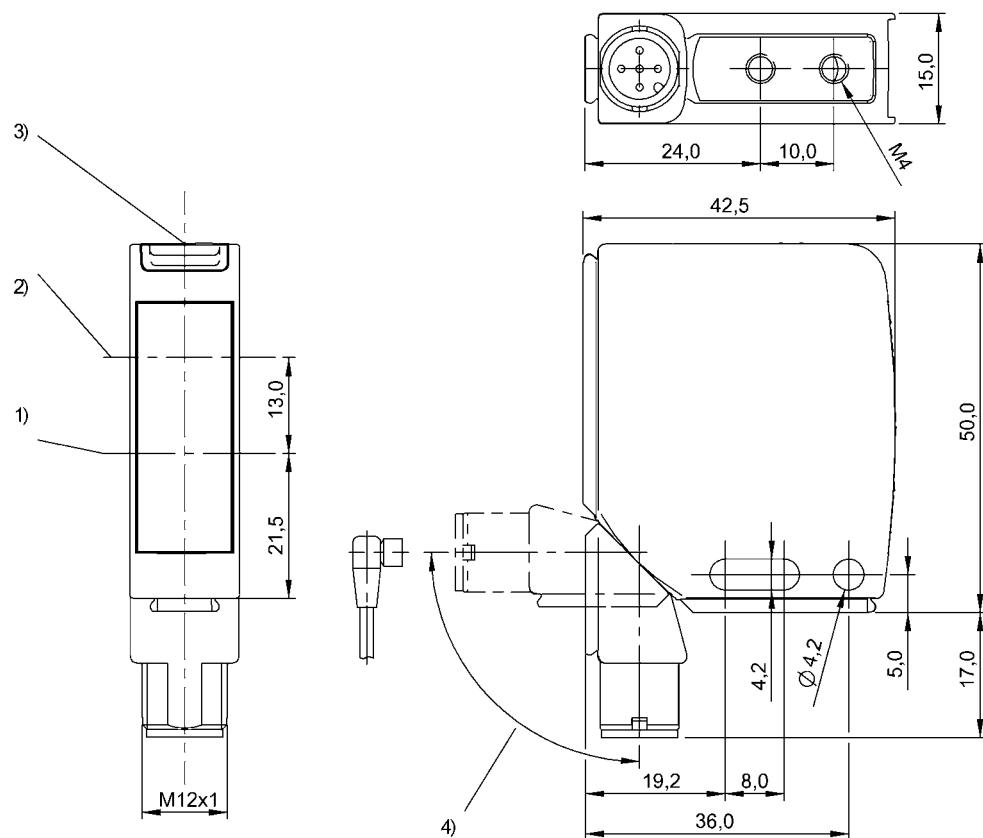

Basic features

Application	Distance measurement
Approval/Conformity	CE UKCA cULus WEEE
Basic standard	IEC 60947-5-2, IEC 60947-5-7
Principle of operation	Photoelectric distance sensor
Series	21M
Style	Square Connection can be rotated

Electrical connection

Connection	Connector, M12x1-Male, 5-pin
Contact, surface protection	Gold plated
Polarity reversal protected	yes
Short-circuit protection	yes

Display/Operation

Adjuster	Rotary switch 5 positions
Display	Output function Output 1 - LED yellow LED green: Power
Setting	Working range Rated switching distance (Sn)

Photoelectric Sensors
BOD 21M-LB04-S92
Order Code: BOD000T

BALLUFF

Electrical data

Load capacitance max. at Ue	0.1 μ F
Load resistance RL min. (Analog V)	2 kOhm
No-load current I ₀ max. at Ue	50 mA
Operating voltage U _b	18...30 VDC
Rated insulation voltage U _i	75 V DC
Rated operating current I _e	100 mA
Rated operating voltage U _e DC	24 V
Ready delay t _v max.	300 ms
Ripple max. (% of U _e)	15 %
Switching frequency	70 Hz
Turn-off delay t _{off} max.	7 ms
Turn-on delay t _{on} max.	7 ms
Utilization category	DC-13
Voltage drop U _d max. at I _e	2 V

Environmental conditions

Ambient temperature	-10...50 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms, 3x6
EN 60068-2-6, Vibration	10...55 Hz, amplitude 0.5 mm, 3x30 min

IP rating

Functional safety

MTTF (40 °C)	69 a
--------------	------

Interface

Analog output	Analog, current 4...20 mA
Output characteristic	linear increasing
Switching output	2x PNP/NPN NO/NC push-pull

Remarks

Order accessories separately.

For additional information, refer to user's guide.

The sensor is functional again after the overload has been eliminated.

Reference object (target): gray card, 200 x 200, 90 % remission, axial approach.

The push-pull switching outputs must not be connected in parallel.

Full accuracy after warmup phase

Only for applications per NFPA 79 (machines with a supply voltage of maximum 600 V). Use an R/C (CYJV2) cable with suitable properties for attaching the device.

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Material

Housing material	Zinc, Die casting
	Aluminium
Material sensing surface	Glass

Mechanical data

Dimension	15 x 42.5 x 50 mm
Distance deviation 6 % max. (% of Sr)	1.5 %
Mounting part	Screw M4

Optical features

Ambient light max.	5000 Lux
Average power P _o max.	1 mW
Beam characteristic	Collimated
Laser class per IEC 60825-1	2
Light spot size	1 x 6 mm at 500 mm
Light type	Laser red light
Principle of optical operation	Triangulation
Pulse duration t max.	3000 μ s
Pulse power P _p max.	1.2 mW
Switching function, optical	Light/dark switching
Wave length	650 nm


Range/Distance

Accuracy	± 3 % FS
Hysteresis H max. (% of Sr)	6.0 %
Range	20...500 mm, adjustable
Rated operating distance S _n	500 mm Adjustable
Repeat accuracy	1 % FS (< 200 mm) 3 % (200...500 mm)
Resolution	100...500 μ m


Photoelectric Sensors
BOD 21M-LB04-S92
Order Code: BOD000T

BALLUFF


Connector Drawings



Wiring Diagrams



Help Views

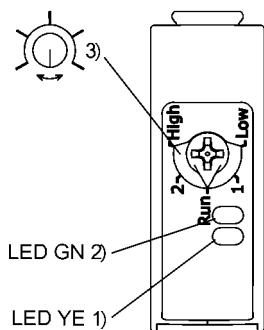


- 1) Output function
- 2) Stability
- 3) Teach-in Sn, WR

Opto Symbols



Warning Symbols



LASER BEAM - DO NOT STARE INTO THE LIGHT BEAM!

LASER CLASS 2 per IEC60825-1: 2003-10