




1) Top cover

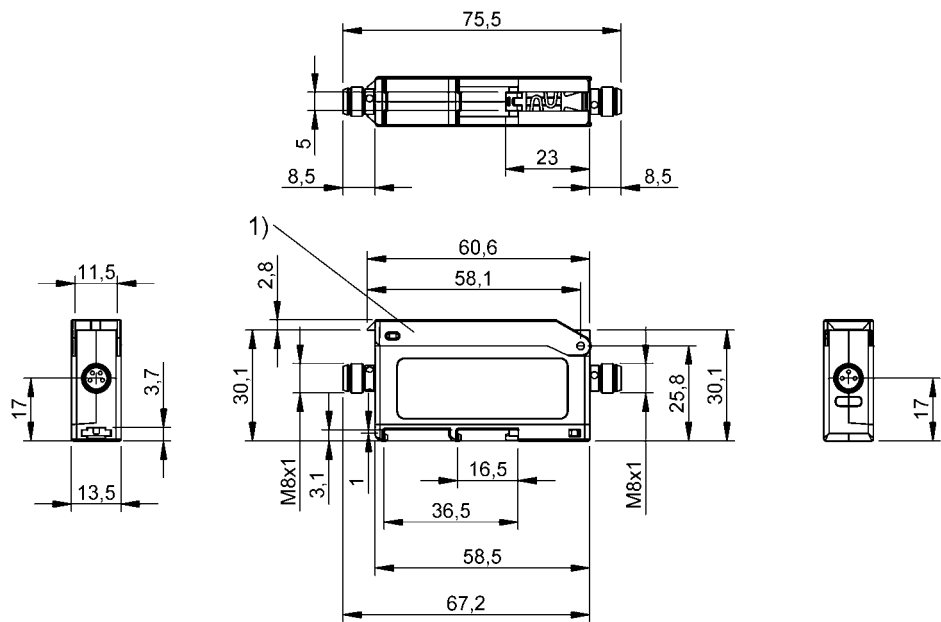

Basic features

Additional features	Teach-in function
Approval/Conformity	CE WEEE cULus UKCA
Basic standard	IEC 60947-5-2
Principle of operation	Signal amplifier
Series	SA-OH
Style	Square Straight connection

Display/Operation

Adjuster	Slide switch 3 positions Slide switch 2 positions (2x) Key (2x)
Display	LED green: Power Error - LED red Output function- LED yellow
Power indicator	Green LED
Setting	Teach Sn Light-on/dark-on On-/off delay

Electrical connection

Connection	Connector, M8x1-Male, 4-pin
Connection 2	Sensor BOH: M8x1-Male, 3-pin
Contact, surface protection	Gold plated
Electrical version	3-/4-wire
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Input function	Teach Sn
Load capacitance max. at Ue	100 nF
No-load current Io max. at Ue	45 mA
Operating voltage Ub	15...30 VDC
Rated insulation voltage Ui	75 V DC
Rated operating current Ie	80 mA
Rated operating voltage Ue DC	24 V
Switching frequency	500 Hz
Turn-off delay toff max.	1 ms
Turn-on delay ton max.	1 ms
Utilization category	DC -13
Voltage drop Ud max. at Ie	2 V

Environmental conditions

Ambient temperature	-5...55 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms, 3x6
EN 60068-2-6, Vibration	10...55 Hz, 1 mm, 5 min
IP rating	IP40

Functional safety

MTTF (40 °C)	437.4 a
--------------	---------

Remarks

For additional information, refer to user's guide.

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Interface

Duration of time function	T = 50 ms
Switching output	NPN normally open/normally closed (NO/NC)
Time function	On/off delay

Material

Housing material	PC PA 12
------------------	-------------

Mechanical data

Dimension	13.5 x 32.9 x 75.5 mm
Mounting part	DIN EN-50022 rail 35 mm DIN EN-50045 rail 15 mm

Optical features


Principle of optical operation	depends on sensor head
Switching function, optical	dark-on/light-on

Range/Distance

Range	depends on sensor head
-------	------------------------

Connector Drawings

3274



1) Sensor connection

58545.SLDDRW

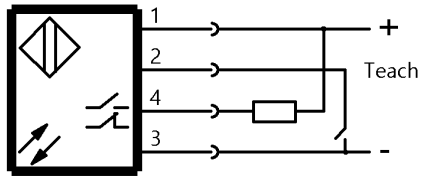


Diagram of the BALLUFF control unit showing various buttons and switches labeled 1 through 7:

- 1) PWR OUT
- 2) BALLUFF
- 3) Full Auto
- 4) 1P. TEACH
- 5) 2P. TEACH
- 6) Light on
- 7) Dark on
- 8) Aut
- 9) Man
- 10) OFF
- 11) ON D
- 12) OFF
- 13) ON D
- 14) OFF
- 15) ON D
- 16) OFF
- 17) ON D
- 18) OFF
- 19) ON D
- 20) OFF
- 21) ON D
- 22) OFF
- 23) ON D
- 24) OFF
- 25) ON D
- 26) OFF
- 27) ON D
- 28) OFF
- 29) ON D
- 30) OFF
- 31) ON D
- 32) OFF
- 33) ON D
- 34) OFF
- 35) ON D
- 36) OFF
- 37) ON D
- 38) OFF
- 39) ON D
- 40) OFF
- 41) ON D
- 42) OFF
- 43) ON D
- 44) OFF
- 45) ON D
- 46) OFF
- 47) ON D
- 48) OFF
- 49) ON D
- 50) OFF
- 51) ON D
- 52) OFF
- 53) ON D
- 54) OFF
- 55) ON D
- 56) OFF
- 57) ON D
- 58) OFF
- 59) ON D
- 60) OFF
- 61) ON D
- 62) OFF
- 63) ON D
- 64) OFF
- 65) ON D
- 66) OFF
- 67) ON D
- 68) OFF
- 69) ON D
- 70) OFF
- 71) ON D
- 72) OFF
- 73) ON D
- 74) OFF
- 75) ON D
- 76) OFF
- 77) ON D
- 78) OFF
- 79) ON D
- 80) OFF
- 81) ON D
- 82) OFF
- 83) ON D
- 84) OFF
- 85) ON D
- 86) OFF
- 87) ON D
- 88) OFF
- 89) ON D
- 90) OFF
- 91) ON D
- 92) OFF
- 93) ON D
- 94) OFF
- 95) ON D
- 96) OFF
- 97) ON D
- 98) OFF
- 99) ON D
- 100) OFF

- 3 / 3