

Basic features

Approval/Conformity	CE cULus UKCA WEEE
Principle of operation	Photoelectric sensor
Scope of delivery	Mounting bracket Reflector
Series	R81K
Style	Square with M18 Bullnose

Display/Operation

Adjuster	Potentiometer 270°
Display	Output function- LED yellow supply voltage - LED green
Setting	Sensitivity (Sn)

Electrical connection

Cable diameter D	3.9 mm
Cable length L	2 m
Connection	Cable, 2 m, PVC
Number of conductors	4
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

No-load current I_0 max. at U_e	20 mA
Operating voltage U_b	10...30 VDC
Rated operating current I_e	200 mA
Rated operating voltage U_e DC	24 V
Ready delay $t_{v \max.}$	100 ms
Voltage drop U_d max. at I_e	1 V

Environmental conditions

Ambient temperature	-15...60 °C
IP rating	IP67

Functional safety

MTTF (40 °C)	260 a
--------------	-------

Interface

Switching output	NPN normally open (NO)
------------------	------------------------

Material

Housing material	ABS
Material jacket	PVC
Material sensing surface	PMMA

Mechanical data

Dimension	15 x 48.9 x 31 mm
Mounting part	Thread M18x1
	Screw M3 (2x)


Optical features

Ambient light max.	10000 Lux
Light spot size	180 x 180 mm at 3 m
Light type	LED, red light
Principle of optical operation	Retroreflective sensor
Wave length	660 nm

Range/Distance

Range	0...3 m
Rated operating distance S_n	3 m Adjustable

Wiring Diagrams

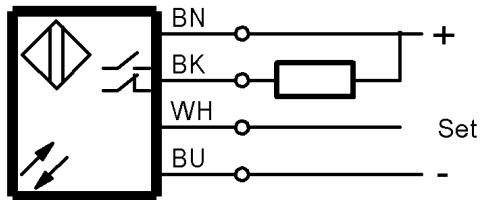

Opto Symbols

