

#### Basic features

Approval/Conformity	CE cULus UKCA WEEE
Principle of operation	Photoelectric sensor
Scope of delivery	Mounting bracket Reflector
Series	R81K
Style	Square with M18 Bullnose

#### Display/Operation

Adjuster	Potentiometer 270°
Display	Output function- LED yellow supply voltage - LED green
Setting	Sensitivity (Sn)

#### Electrical connection

Connection	Connector, M12x1-Male, 4-pin
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

#### Electrical data

No-load current $I_0$ max. at $U_e$	20 mA
Operating voltage $U_b$	10...30 VDC
Rated operating current $I_e$	200 mA
Rated operating voltage $U_e$ DC	24 V
Ready delay $t_{Vmax}$	100 ms
Voltage drop $U_d$ max. at $I_e$	1 V

#### Environmental conditions

Ambient temperature	-15...60 °C
IP rating	IP67

#### Functional safety

MTTF (40 °C)	260 a
--------------	-------

#### Interface

Switching output	PNP normally open (NO)
------------------	------------------------

#### Material

Housing material	ABS
Material sensing surface	PMMA

#### Mechanical data

Dimension	15 x 48.9 x 31 mm
Mounting part	Thread M18x1
	Screw M3 (2x)

#### Optical features

Ambient light max.	10000 Lux
Light spot size	180 x 180 mm at 3 m
Light type	LED, red light
Principle of optical operation	Retroreflective sensor
Wave length	660 nm


#### Range/Distance

Range	0...3 m
Rated operating distance $S_n$	3 m Adjustable

#### Connector Drawings



#### Wiring Diagrams

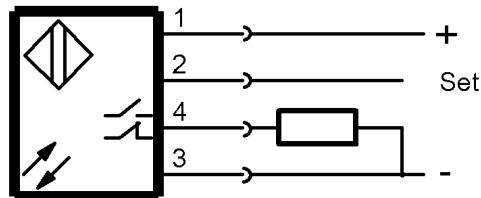

#### Opto Symbols

