


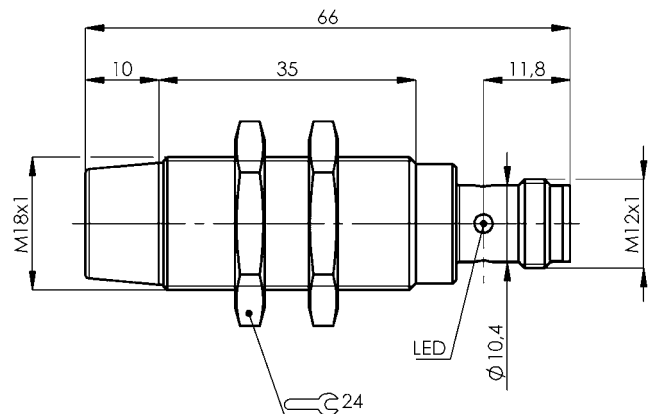

Basic features

Application	Object detection
Approval/Conformity	CE UKCA cULus Ecolab WEEE
Basic standard	IEC 60947-5-2
Operating mode	SIO Mode IO-Link Mode
Scope of delivery	Nut M18x1-24mm flat-to-flat (2x)
Secondary features for condition monitoring	Vibration monitoring Inclination monitoring and installation aid Internal temperature monitoring Internal humidity detection

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Connection	M12x1-Male, 4-pin, A-coded
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	0.25 μ F
Min. operating current Im	0 mA
No-load current Io max., damped	20 mA
No-load current Io max., undamped	20 mA
Operating voltage Ub	10...30 VDC
Output resistance Ra	100.0 kOhm
Rated operating current Ie	100 mA
Rated operating voltage Ue DC	24 V
Rated short circuit current	100 A
Ready delay tv max.	300 ms
Ripple max. (% of Ue)	15 %
Switching frequency	700 Hz
Utilization category	DC -13
Voltage drop static max.	1.5 V

Environmental conditions

Ambient temperature	-40...85 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP68, IP69K/IP68//IP69K

Functional safety

MTTF (40 °C)	484.5 a
--------------	---------

IO-Link

IO-Link Profil IDs	0x0004 SSP2.1
	0x0005 SSP2.2
	0x0006 SSP2.3
	0x4000 Identification and Diagnosis
Supported IO-Link Profiles	Common Profile
	Legacy Smart Sensor Profile
	Smart Sensor Profile - Adjustable
	Switching Sensor

Interface

Interface	IO-Link 1.1
Interface setting option	Factory setting (Reset)
	SIO mode/IO-Link mode
	Teach-In of switchpoints
Process data IN	Teaching successfully reply
	1 byte
	Switching state
Switching output	PNP/NPN/push-pull NO/NC
	Push-pull NO/NC

Material

Housing material	1.4404 stainless steel
Material sensing surface	PBT

Mechanical data

Dimension	Ø 18 x 66 mm
Installation	non-flush
Mounting length	35 mm
Size	M18x1
Tightening torque	15 Nm

Range/Distance

Assured operating distance Sa	9.6 mm
Hysteresis H max. (% of Sr)	15 %
Measuring range	1...12 mm
Rated operating distance Sn	12 mm
Repeat accuracy max. (% of Sr)	5.0 %
Switching distance marking	■ ■
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	10 %

Remarks

Sensors with IO-Link function are not suitable for series or parallel wiring.
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams

