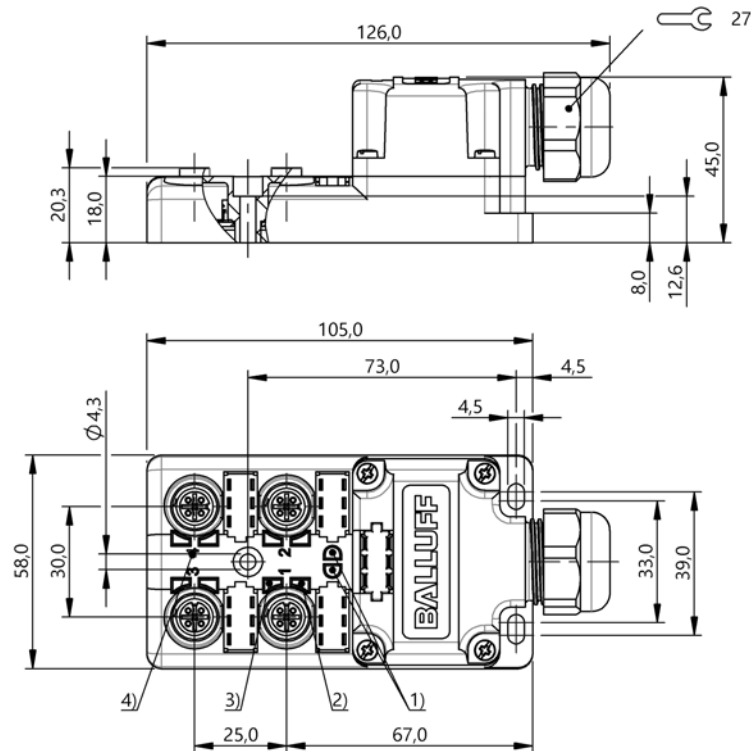




1) Power ind. green potential, 2) LED ye for S2 on PIN 2, 3) LED ye for S1 on PIN 4, 4) Slot numbering



Basic features

Approval/Conformity	CE UKCA WEEE
Not incl. in scope of delivery	M4 fastening screw
Scope of delivery	Cover cap (2x) Part labels (24x)

Display/Operation

Power indicator	LED green (2x)
Switching function display	Yellow LED (8x)

Electrical connection

Connection slots	4x M12x1-Female, 5-pin
------------------	------------------------

Electrical data

Current consumption per LED	4 mA
Galvanic isolation	+24 V and 0 V for left side (Slots 1, 3) and right side (Slots 2, 4) by means of cable bridge
Isolation resistance	$\geq 10 \text{ GOhm}$
Operating voltage U_b	18...30 VDC
Output current max.	4 A
Protection class	III (EN 60664-1)
Rated operating voltage $U_e \text{ DC}$	24 V
Total current max.	8 A (for 2x feed) 8 A (for 1x feed)
Withstand voltage	800 V

Environmental conditions

Ambient temperature	-25...80 °C
Contamination scale	3
EN 60068-2-27, Shock	100 g, 6 ms
EN 60068-2-6, Vibration	10...60 Hz, constant amplitude 2 mm 61...500 Hz, constant acceleration 15 g
IP rating	IP67, when threaded in

Material



Housing material	PBT
Material contact carrier	PA 6.6
Material contacts	Brass

Mechanical data

Casting	yes
Connection cross-section	0.08...1.5 mm ²
Mounting part	M4 (3x)
Tightening torque	1.2 Nm ±0.2 (M4)
Tightening torque pigtail	0.6 Nm + 0.1 Nm (M12 connector)

Connector Drawings

Anschlussstabelle / terminal diagram

Klemme Nr. Termina No.	M12 Buchse / M12 Socket Steckplatz/Kontakt / Slot/contact	Kontaktbelegung / Contactassignment
1	1 / 4	Buchse / Socket M12 (-) 3 4 (NO/1.Signal) 5 (PE) (NC/2.Signal) 2 1 (+)  Klemmen / terminals BR1 BR2 
9	1 / 2	
2	2 / 4	
10	2 / 2	
3	3 / 4	
11	3 / 2	
4	4 / 4	
12	4 / 2	
+1	1, 3 / 1 (+)	
+2	2, 4 / 1 (+)	
-1	1, 3 / 3 (-)	
-2	2, 4 / 3 (-)	
PE	1-4 / 5 (PE)	

Wiring Diagrams

