


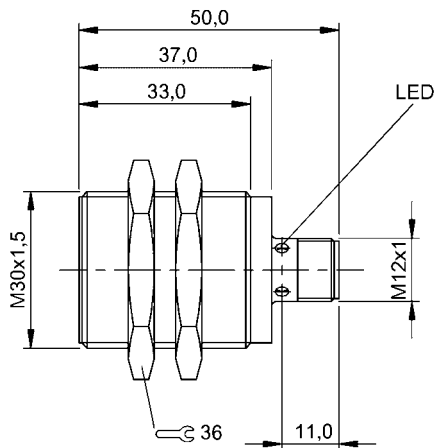

Basic features

Approval/Conformity

CE
ATEX
IECEx
FM
cCSAus
WEEE
CCC Ex

Basic standard

EN IEC 60079-0
EN 60079-11
EN 60079-26
IEC 60079-0
IEC 60079-11
IEC 60079-26
IEC 60529
IEC 60947-5-6
CSA Class 258 04
CSA Class 258 84
FM Class 3600
FM Class 3610
FM Class 3810
Including Supplement 1
ANSI/NEMA 250

Ex marking

ATEX: Ex II 1G Ex ia IIB T6 Ga Ta: -20 ... 70 °C
Ex II 2G Ex ia IIC T6 Gb Ta: -20 ... 70 °C
Ex II 1D Ex ia IIIC T90°C Da Ta: -20 ... 70 °C
IECEx: Ex ia IIC T6 Gb Ta: -20...70 °C
Ex ia IIB T6 Ga Ta: -20...70 °C
Ex ia IIIC T90°C Da Ta: -20...70 °C
NEC: CSA/FM Class I, Division 1, Groups ABCD
Class II, Division 1, Groups EFG
Class III

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Connection	M12x1-Male, 4-pin, A-coded
Polarity reversal protected	no

Inductive Sensors
BES M30ME1-GNX15B-S04G-EEX
Order Code: BES02ZY

BALLUFF

Electrical data

Current consumption max., damped	1 mA
Current consumption min., undamped	2.1 mA
Internal capacitance Ci max.	230 nF
Internal inductance Li max.	0.21 nH
Operating voltage Ub	7.7...9 VDC
Rated insulation voltage Ui	75 V DC
Rated operating voltage Ue DC	8.2 V
Rated series resistance Rv	1000 Ohm
Ready delay tv max.	30 ms
Switching frequency	100 Hz

Environmental conditions

Ambient temperature	-20...70 °C
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

Functional safety

MTTF (40 °C)	2514 a
--------------	--------

Interface

Interface	NAMUR
-----------	-------

Material

Housing material	Brass, Nickel-free coated
Material sensing surface	PBT

Mechanical data

Dimension	Ø 30 x 50 mm
Installation	for flush mounting
Mounting length	33.00 mm
Size	M30x1.5
Tightening torque	50 Nm

Range/Distance

Assured operating distance Sa	12 mm
Rated operating distance Sn	15 mm
Real switching distance sr	15 mm
Repeat accuracy max. (% of Sr)	5.0 %
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	±10 %

Remarks

Operating manual must be followed.
Operate only with suitable approved switching amplifier.
Use only in approved intrinsically safe circuits with max. values Ui = 15 V, Ii = 50 mA, Pi = 120 mW.
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams

