


Inductive Sensors
BES IKN-S5-070-W-4-S
Order Code: BES02T0

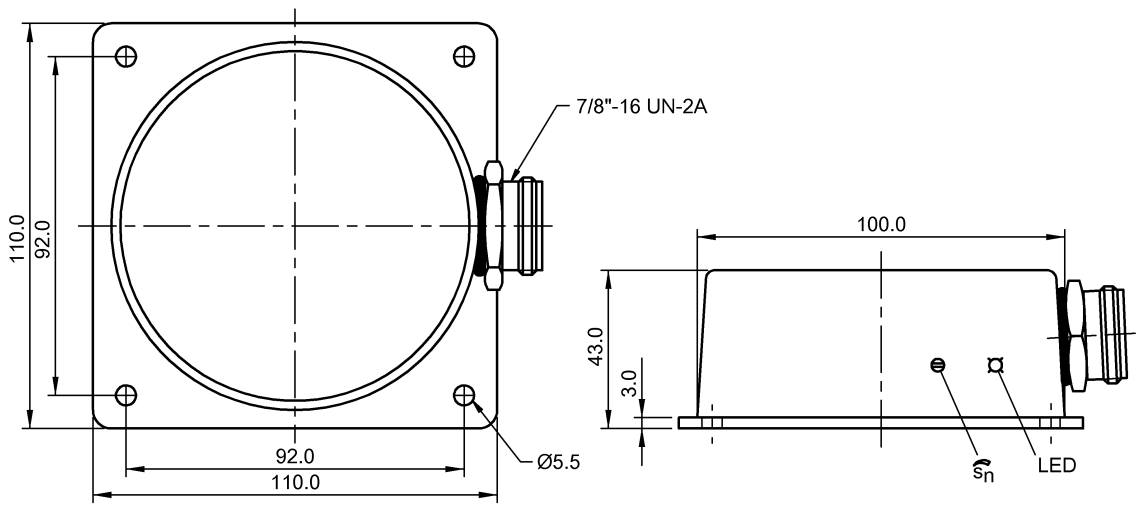

Basic features

Approval/Conformity	CE WEEE
Basic standard	IEC 60947-5-2

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Connection	7/8\"-16 UN2A
Polarity reversal protected	yes
Protection against device mix-ups	no
Short-circuit protection	yes

Electrical data

Min. operating current Im	5 mA
Operating voltage Ub	20...260 VAC
Rated insulation voltage Ui	260 V AC
Rated operating current Ie	400 mA
Rated operating voltage Ue AC	110 V
Rated short circuit current	100 A
Residual current Ir max.	1500 µA
Switching frequency	25 Hz
Utilization category	AC-140
Voltage drop static max.	10 V

Environmental conditions

Ambient temperature	-25...70 °C
IP rating	IP67

Interface

Switching output	normally open (NO)
------------------	--------------------

Material

Housing material	PE, Macrolon Polyester
Material sensing surface	Macrolon

Mechanical data

Dimension	110 x 110 x 43 mm
Installation	non-flush
Size	110x110x43

Range/Distance

Assured operating distance Sa	56 mm
Hysteresis H max. (% of Sr)	15.0 %
Measuring range	35...105 mm
Rated operating distance Sn	70 mm
Repeat accuracy max. (% of Sr)	5.0 %
Temperature drift max. (% of Sr)	5 %
Tolerance Sr	±10 %

Remarks

Protection class with protection screw installed for adjusting unit.

Connector Drawings



Wiring Diagrams

