


Inductive Sensors
BES IKZ-475.38-G-S4
Order Code: BES02UN

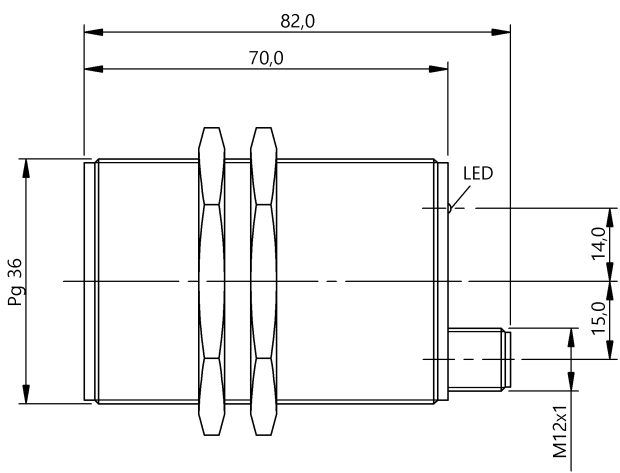

Basic features

Approval/Conformity	CE WEEE
Basic standard	IEC 60947-5-2

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Connection	M12x1-Male, 4-pin, A-coded
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	0.15 µF
Min. operating current Im	1 mA
No-load current Io max., damped	10 mA
No-load current Io max., undamped	10 mA
Operating voltage Ub	10...55 VDC
Output resistance Ra	Open collector
Rated insulation voltage Ui	75 V DC
Rated operating current Ie	200 mA
Rated operating voltage Ue DC	24 V
Rated short circuit current	100 A
Ripple max. (% of Ue)	15 %
Switching frequency	100 Hz
Utilization category	DC -13
Voltage drop static max.	2 V

Environmental conditions

Ambient temperature	-20...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

Interface

Switching output	PNP normally open/normally closed (NO/NC)
------------------	---

Material

Housing material	Brass, nickel-plated
Material sensing surface	Plastic

Mechanical data

Dimension	Ø 40 x 82 mm
Installation	quasi-flush
Mounting length	70.00 mm
Size	PG36
Tightening torque	40 Nm

Range/Distance

Assured operating distance Sa	20 mm
Hysteresis H max. (% of Sr)	15.0 %
Rated operating distance Sn	25 mm
Real switching distance sr	25 mm
Repeat accuracy max. (% of Sr)	5.0 %
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	±10 %

Remarks

After eliminating the overload, the sensor is functional again after a load-dependent delay time of 5-30 s.
Quasi-flush: free zone 5 mm

Connector Drawings



Wiring Diagrams

