




1) SP1 active / error, 2) SP1: recvr., light/dark, 3) SP2 active / error, 4) SP2: recvr., light/dark, 5) Pneumatics connection PK-3

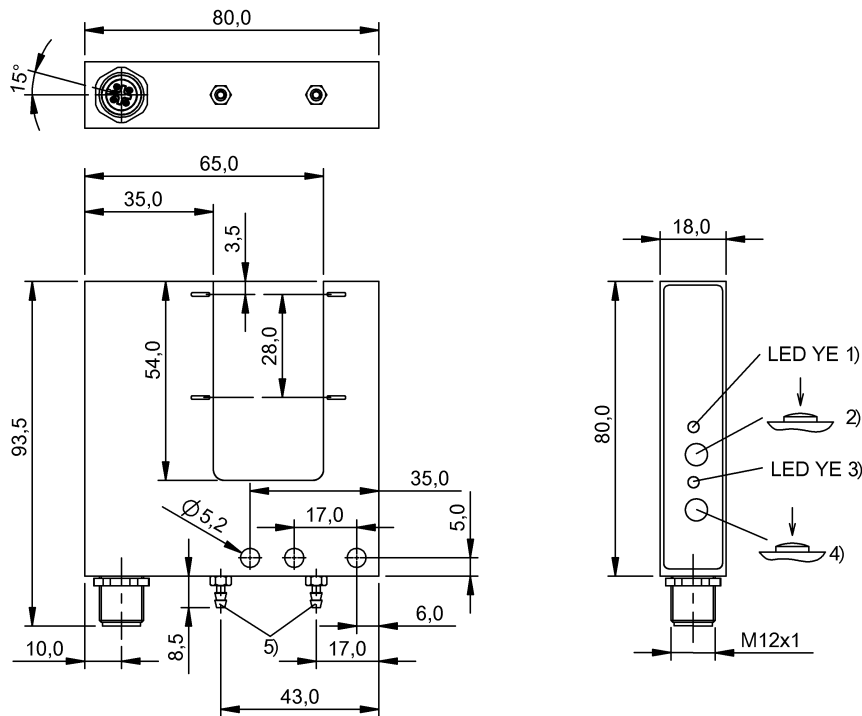

Basic features

Additional features	Contamination compensation to up to 10% loss in intensity.
Approval/Conformity	CE UKCA WEEE
Basic standard	IEC 60947-5-2
Principle of operation	Fork sensor
Series	C
Style	Fork Straight connection

Display/Operation

Adjuster	Key (2x)
Display	Error - 2 x LED yellow, flashing Switchpoint 1 - LED yellow Switchpoint 2 - LED yellow
Setting	Light-on/dark-on Sensitivity, 2 values

Electrical connection

Connection	Connector, M12x1-Male, 4-pin
Polarity reversal protected	yes

Electrical data

Load capacitance max. at U _e	2.2 µF
No-load current I _o max. at U _e	30 mA
Operating voltage U _b	18...30 VDC
Rated operating voltage U _e DC	24 V
Ripple max. (% of U _e)	10 %
Utilization category	DC -13
Voltage drop U _d max. at I _e	1 V

Environmental conditions

Ambient temperature	-5...55 °C
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms, 3x6
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP65

IO-Link

IO-Link Profil IDs	N/A
--------------------	-----

Interface

Interface	IO-Link
-----------	---------

Material

Housing material	Aluminium, Anodized
Material sensing surface	PMMA
Surface protection	Anodized

Mechanical data

Dimension	18 x 80 x 93.5 mm
Fork opening	30 mm
Mounting part	Screw M5

Remarks

Do not press key using a pointed tool.
Order accessories separately.
For additional information, refer to user's guide.
Reference object (target): Steel plate, 50 x 50, thickness 0.5 mm, lateral approach.

Optical features

Ambient light max.	5000 Lux
Beam characteristic	Divergent
LED group per IEC 62471	Exempt Group
Light beams, number	10
Light spot size	3 x 28 mm Light exit
Light type	LED, red light
Principle of optical operation	Through-beam sensor
Special optical feature	Light array
Switching function, optical	dark-on/light-on
Wave length	633 nm


Range/Distance

Active length AL 1	28 mm
Hysteresis H max.	0.4 mm
Repeat accuracy lateral max.	150 µm
Resolution	≤ 0.08 mm

Connector Drawings




Wiring Diagrams



Opto Symbols



Warning Symbols



LED light – DO NOT LOOK INTO THE BEAM!

Exempt Group per IEC 62471:2006-07