




## Product: [RSHS 8X-478 CN](#)

Gigabit Ethernet Cat6A Data Receptacle Connector: Male, rear mount, M12-mating side, cable - connecting side, 8-pin, X-coded, shielded, metallic housing, 50 V AC / 60 V DC, 0.5 A; PUR black cable, 8-wires, 4x2x0.14mm2

### Product Description

Gigabit Ethernet Cat6A Data Receptacle Connector: Male, rear mount, M12 - mating side, cable - connecting side, 8-pin, X-coded, shielded, metallic housing, 50 V AC / 60 V DC, 0.5 A; PUR black cable, 8-wires, 4x2x0.14mm2

### Technical Drawing

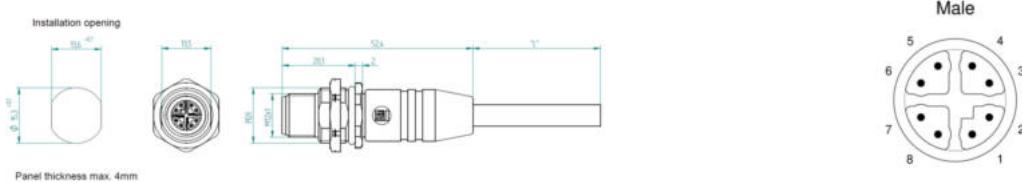

### Technical Specifications

#### Face View

Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8
white (orange)	orange	white (green)	green	white (brown)	brown	white (blue)	blue

#### Technical Data

Product Family:	Data Connectors
Product Sub Family:	M12 Standard
Mating Side:	M12
Connecting Side:	Cable
Brand:	Lumberg Automation
Connector Type:	Receptacle
Type of Contact / Gender:	Male
Connector Design:	Rear Mount
Number of Pins:	8
Coding:	X
Shielding:	Shielded
Attachment Type:	Screw-Locking
Rated Voltage:	60 V
Rated Impulse Voltage:	1.5 kV

Operating Voltage:	50 V AC/60 V DC
Rated Current*:	0.5 A
Rated Current (UL)*:	0.5 A
Data Transmission Rate:	Gigabit Ethernet Cat6A
Contact Resistance:	≤ 10 mOhm
Insulation Resistance:	> 10^8 Ohm
Mating Cycles:	≤ 100
Thread Size:	PG9
Thread Material:	CuZn
Thread Plating:	Nickel-plated
Ambient Temperature (Operation)*:	- 25 °C - + 85 °C
Protection Degree / IP Rating**:	IP 67
Design Standard:	IEC 61076-2-109

## Materials

Contact Plating:	Cu/Au
Molded Body Material:	PA
Molded Body Color:	Black
Housing Material:	CuZn
Housing Plating:	Nickel-plated
O-Ring Material:	FKM

## Cable Data

Cable Number:	478
Conductor Size:	4x2x0.14 mm <sup>2</sup>
Number of Wires:	8
Minimal Bending Radius (Fixed Inst):	> 30 mm
Minimal Bending Radius (Flexible Inst):	> 65 mm
Cycles (Bending):	> 0.2 M
Conductor material:	Cu
Cable Jacket Material:	PUR
Cable Jacket Color:	black
Cable Diameter D:	ø 6.8 ± 0.3 mm
Wire Insulation Material:	PE
Insulated Wire Diameter:	ø 1.05 ± 0.05 mm
Overall Shield (Cable):	Cu-ETP1 tinned
Foil shield:	Al-PT Foil
Ambient Temperature (Fixed Installation):	- 40 °C - + 80 °C
Ambient Temperature (Flex Installation):	0°C - + 50 °C
UL Cable Type:	AWM: 21327
Core Colors:	Twisted pairs: white & blue, white & orange, white & green, white & brown

## Safety & Environmental Compliance

RoHS Compliant:	yes
-----------------	-----

## Notes

Note Derating:	Notice derating
Protection Degree / IP Rating Note:	** only if mounted and locked in combination with Hirschmann / Lumberg Automation connector.
Note:	The receptacle connector is constructively intended for usage in IP67-products. To realise this protection class, the estimated location has to be designed accordingly. Further details see IEC 61076-2-109.

## Variants

Item #	Item Description	Cable Length
94781001	RSHS 8X-478/1M CN	1m

© 2025 Belden, Inc

All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described here in are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.

Belden believes this product to be in compliance with all applicable environmental programs as listed in the data sheet. The information provided is correct to the best of Belden's knowledge, information and belief at the date of its publication. This information is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. The Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.