




**Product:** [RST 5-RKT 5-289](#)

Sensor/Actuator Double-Ended Cordset: Male straight A-coded translucent 5-pin M12 Standard connector to female straight A-coded translucent 5-pin M12 Standard connector, 50 V AC / 60 V DC, 4 A; PVC black cable, 5-wires, 0.34 mm<sup>2</sup>


**Product Description**

Sensor/Actuator Double-Ended Cordset: Male straight A-coded translucent 5-pin M12 Standard connector to female straight A-coded translucent 5-pin M12 Standard connector, 50 V AC / 60 V DC, 4 A; PVC black cable, 5-wires, 0.34 mm<sup>2</sup>


**Technical Drawing**

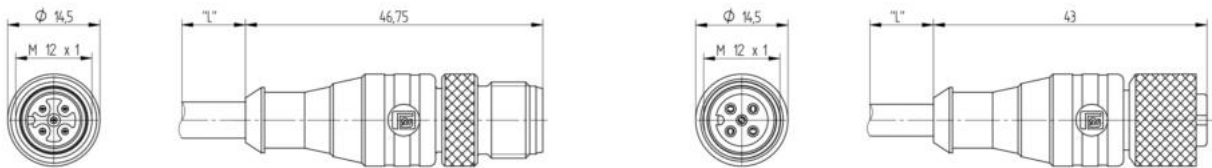

**Male**



**Female**



**Technical Specifications**

Face View Side 1

| Pin 1 | Pin 2 | Pin 3 | Pin 4 | Pin 5        |
|-------|-------|-------|-------|--------------|
| brown | white | blue  | black | green-yellow |

Face View Side 2

| Pin 1 | Pin 2 | Pin 3 | Pin 4 | Pin 5        |
|-------|-------|-------|-------|--------------|
| brown | white | blue  | black | green-yellow |

Product Description

|                        |                              |
|------------------------|------------------------------|
| Product Family:        | Sensor / Actuator Connectors |
| Brand:                 | Lumberg Automation           |
| Connector Type:        | Cordset, double ended        |
| Shielding:             | Unshielded                   |
| Rated Voltage:         | 60 V                         |
| Rated Impulse Voltage: | 1.5 kV                       |
| Operating Voltage:     | 50 V AC / 60 V DC            |
| Rated Current*:        | 4 A                          |

Technical Data Side 1

|                                      |                                          |
|--------------------------------------|------------------------------------------|
| Product Sub Family:                  | M12 Standard                             |
| Type of Contact / Gender:            | Male                                     |
| Connector Design:                    | Straight                                 |
| Attachment Type:                     | Coupling Screw                           |
| Number of Pins:                      | 5                                        |
| Coding:                              | A                                        |
| Contact Resistance:                  | ≤ 10 mOhm                                |
| Insulation Resistance:               | > 10^9 Ohm                               |
| Mating Cycles:                       | ≤ 100                                    |
| Ambient Temperature (Operation)*:    | - 40 °C - + 90 °C                        |
| Protection Degree / IP Rating**:     | IP65, IP67                               |
| Design Standard:                     | IEC 61076-2-101                          |
| Pollution Degree:                    | 3 acc. to DIN EN 60664-1 (VDE 0110-1)    |
| Overvoltage Category:                | III acc. to DIN EN 60664-1 (VDE 0110-1)  |
| Contact Base Material:               | CuSn                                     |
| Contact Plating:                     | Cu/Au                                    |
| Contact Bearer Material:             | TPU-GF                                   |
| Contact Bearer Color:                | Orange                                   |
| Flammability Class (Contact Bearer): | UL 94 HB                                 |
| Molded Body Material:                | TPU                                      |
| Molded Body Color:                   | Translucent                              |
| Flammability Class (Molded Body):    | UL 94 HB                                 |
| Attachment Material:                 | CuZn                                     |
| Attachment Plating:                  | Nickel-plated                            |
| Fastening Torque (Attachment):       | M 12x1: (50-60) Ncm, hand-tight          |
| Note:                                | Do not connect or disconnect under load. |

Cable Data

|                                           |                                                                      |
|-------------------------------------------|----------------------------------------------------------------------|
| Cable Number:                             | 289                                                                  |
| Conductor Size:                           | 0.34 mm²                                                             |
| Number of Wires:                          | 5                                                                    |
| Minimal Bending Radius (Fixed Inst):      | > 5 x D                                                              |
| Minimal Bending Radius (Flexible Inst):   | > 10 x D                                                             |
| Conductor material:                       | Cu                                                                   |
| Cable Jacket Material:                    | PVC                                                                  |
| Cable Jacket Color:                       | black                                                                |
| Cable Diameter D:                         | ø 5.50 ± 0.20 mm                                                     |
| Wire Insulation Material:                 | PVC                                                                  |
| Insulated Wire Diameter:                  | ø 1.40 mm                                                            |
| Ambient Temperature (Fixed Installation): | - 40 °C - + 80 °C                                                    |
| Ambient Temperature (Flex Installation):  | - 20 °C - + 80 °C                                                    |
| Flammability Class (Cable Jacket):        | DIN EN 60332-1-2, VDE 0482-332-1-2, IEC 60332-1-2                    |
| Cable Characteristics:                    | Free of lacquer wetting disturbing substances; Exclusion of silicone |

Technical Data Side 2

|                                              |                                         |
|----------------------------------------------|-----------------------------------------|
| Product Sub Family, Side 2:                  | M12 Standard                            |
| Type of Contact / Gender, Side 2:            | Female                                  |
| Connector Design, Side 2:                    | Straight                                |
| Attachment Type, Side 2:                     | Coupling Nut                            |
| Number of Pins, Side 2:                      | 5                                       |
| Coding, Side 2:                              | A                                       |
| Contact Resistance, Side 2:                  | ≤ 10 mOhm                               |
| Insulation Resistance, Side 2:               | > 10^9 Ohm                              |
| Mating Cycles, Side 2:                       | ≤ 100                                   |
| Ambient Temperature (Operation), Side 2*:    | - 40 °C - + 90 °C                       |
| Protection Degree / IP Rating, Side 2**:     | IP65, IP67                              |
| Design Standard, Side 2:                     | IEC 61076-2-101                         |
| Pollution Degree, Side 2:                    | 3 acc. to DIN EN 60664-1 (VDE 0110-1)   |
| Overvoltage Category, Side 2:                | III acc. to DIN EN 60664-1 (VDE 0110-1) |
| Contact Base Material, Side 2:               | CuSn                                    |
| Contact Plating, Side 2:                     | Cu/Au                                   |
| Contact Bearer Material, Side 2:             | TPU                                     |
| Contact Bearer Color, Side 2:                | Orange                                  |
| Flammability Class (Contact Bearer), Side 2: | UL 94 HB                                |
| Molded Body Material, Side 2:                | TPU                                     |
| Molded Body Color, Side 2:                   | Translucent                             |
| Flammability Class (Molded Body), Side 2:    | UL 94 HB                                |
| Attachment Material, Side 2:                 | CuZn                                    |
| Attachment Plating, Side 2:                  | Nickel-plated                           |
| O-Ring Material, Side 2:                     | FKM, green                              |
| Fastening Torque (Attachment), Side 2:       | M 12x1: (50-60) Ncm, hand-tight         |

Safety & Environmental Compliance

|                 |     |
|-----------------|-----|
| RoHS Compliant: | yes |
|-----------------|-----|

Resistances

|                 |                                  |
|-----------------|----------------------------------|
| Oil Resistance: | Good chemical and oil resistance |
|-----------------|----------------------------------|

Notes

|                                     |                                                                                              |
|-------------------------------------|----------------------------------------------------------------------------------------------|
| Protection Degree / IP Rating Note: | ** only if mounted and locked in combination with Hirschmann / Lumberg Automation connector. |
| Note Derating:                      | Notice derating                                                                              |

Variants

| Item #    | Item Description      | Cable Length |
|-----------|-----------------------|--------------|
| 51498     | RST 5-RKT 5-289/1 M   | 1 m          |
| 51506     | RST 5-RKT 5-289/2 M   | 2 m          |
| 51507     | RST 5-RKT 5-289/5 M   | 5 m          |
| 51508     | RST 5-RKT 5-289/10 M  | 10 m         |
| 56363     | RST 5-RKT 5-289/3 M   | 3 m          |
| 59587     | RST 5-RKT 5-289/20 M  | 20 m         |
| 63896     | RST 5-RKT 5-289/15 M  | 15 m         |
| 934636863 | RST 5-RKT 5-289/25 M  | 25 m         |
| 934637213 | RST 5-RKT 5-289/1,5 M | 1.5 m        |
| 934637271 | RST 5-RKT 5-289/0,6 M | 0.6 m        |
| 934636864 | RST 5-RKT 5-289/30 M  | 30 m         |
| 19575     | RST 5-RKT 5-289/40 M  | 40 m         |
| 20173     | RST 5-RKT 5-289/50 M  | 50 m         |

at the date of its publication. This information is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. The Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.