

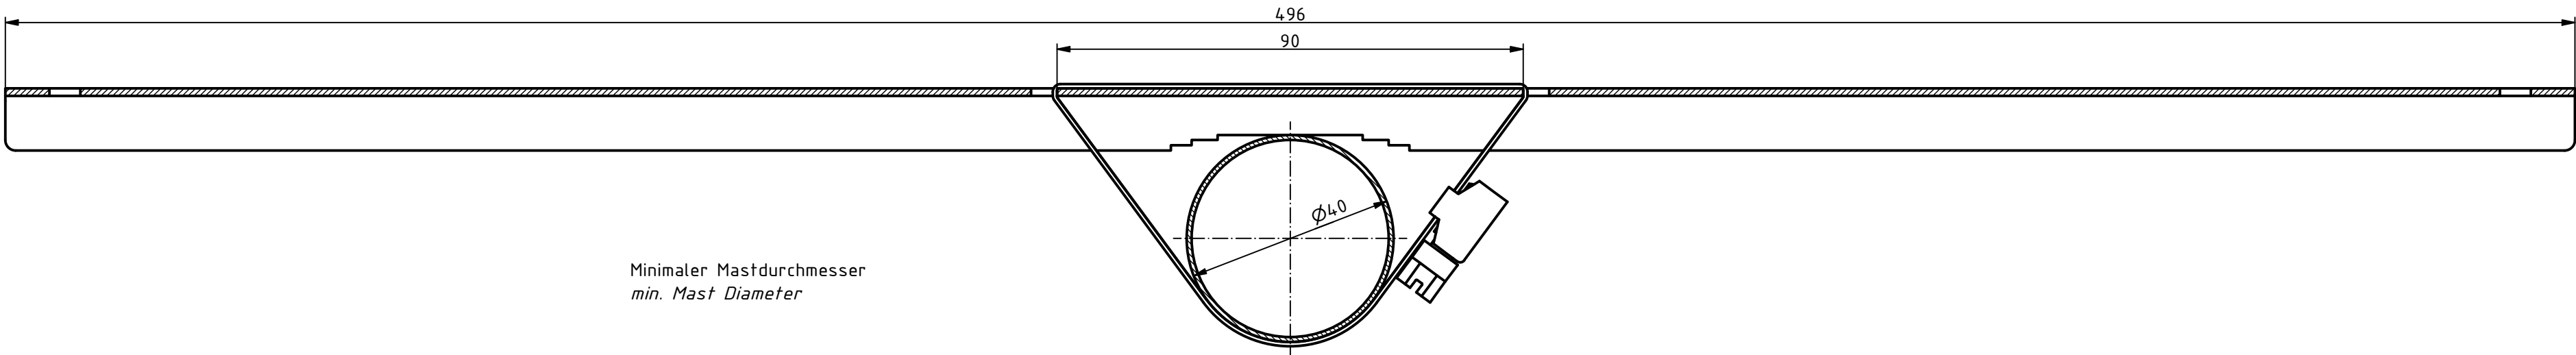




Anschraubposition / Screw-on position	
Model / model	Bohrabstand / drilling distance
PS 652/-T	A

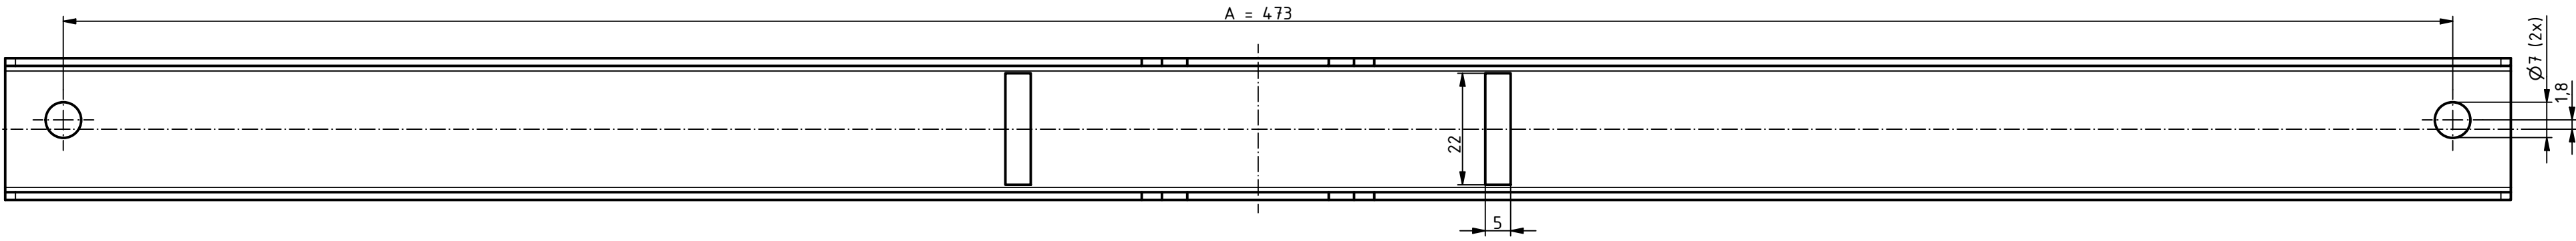


Minimaler Mastdurchmesser
min. Mast Diameter

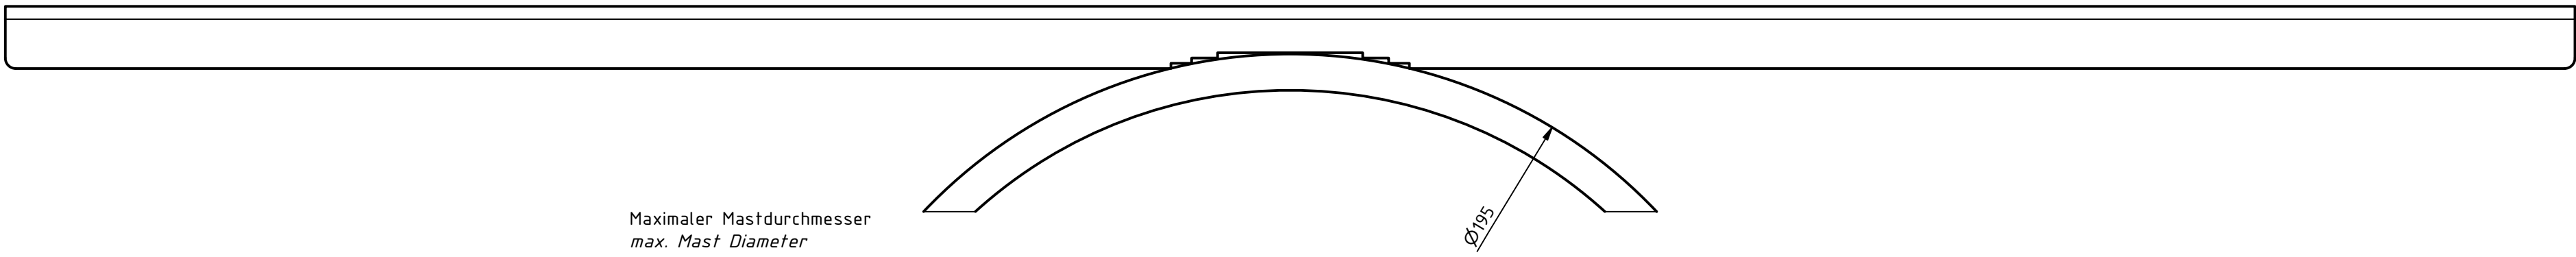

Maximaler Mastdurchmesser
max. Mast Diameter

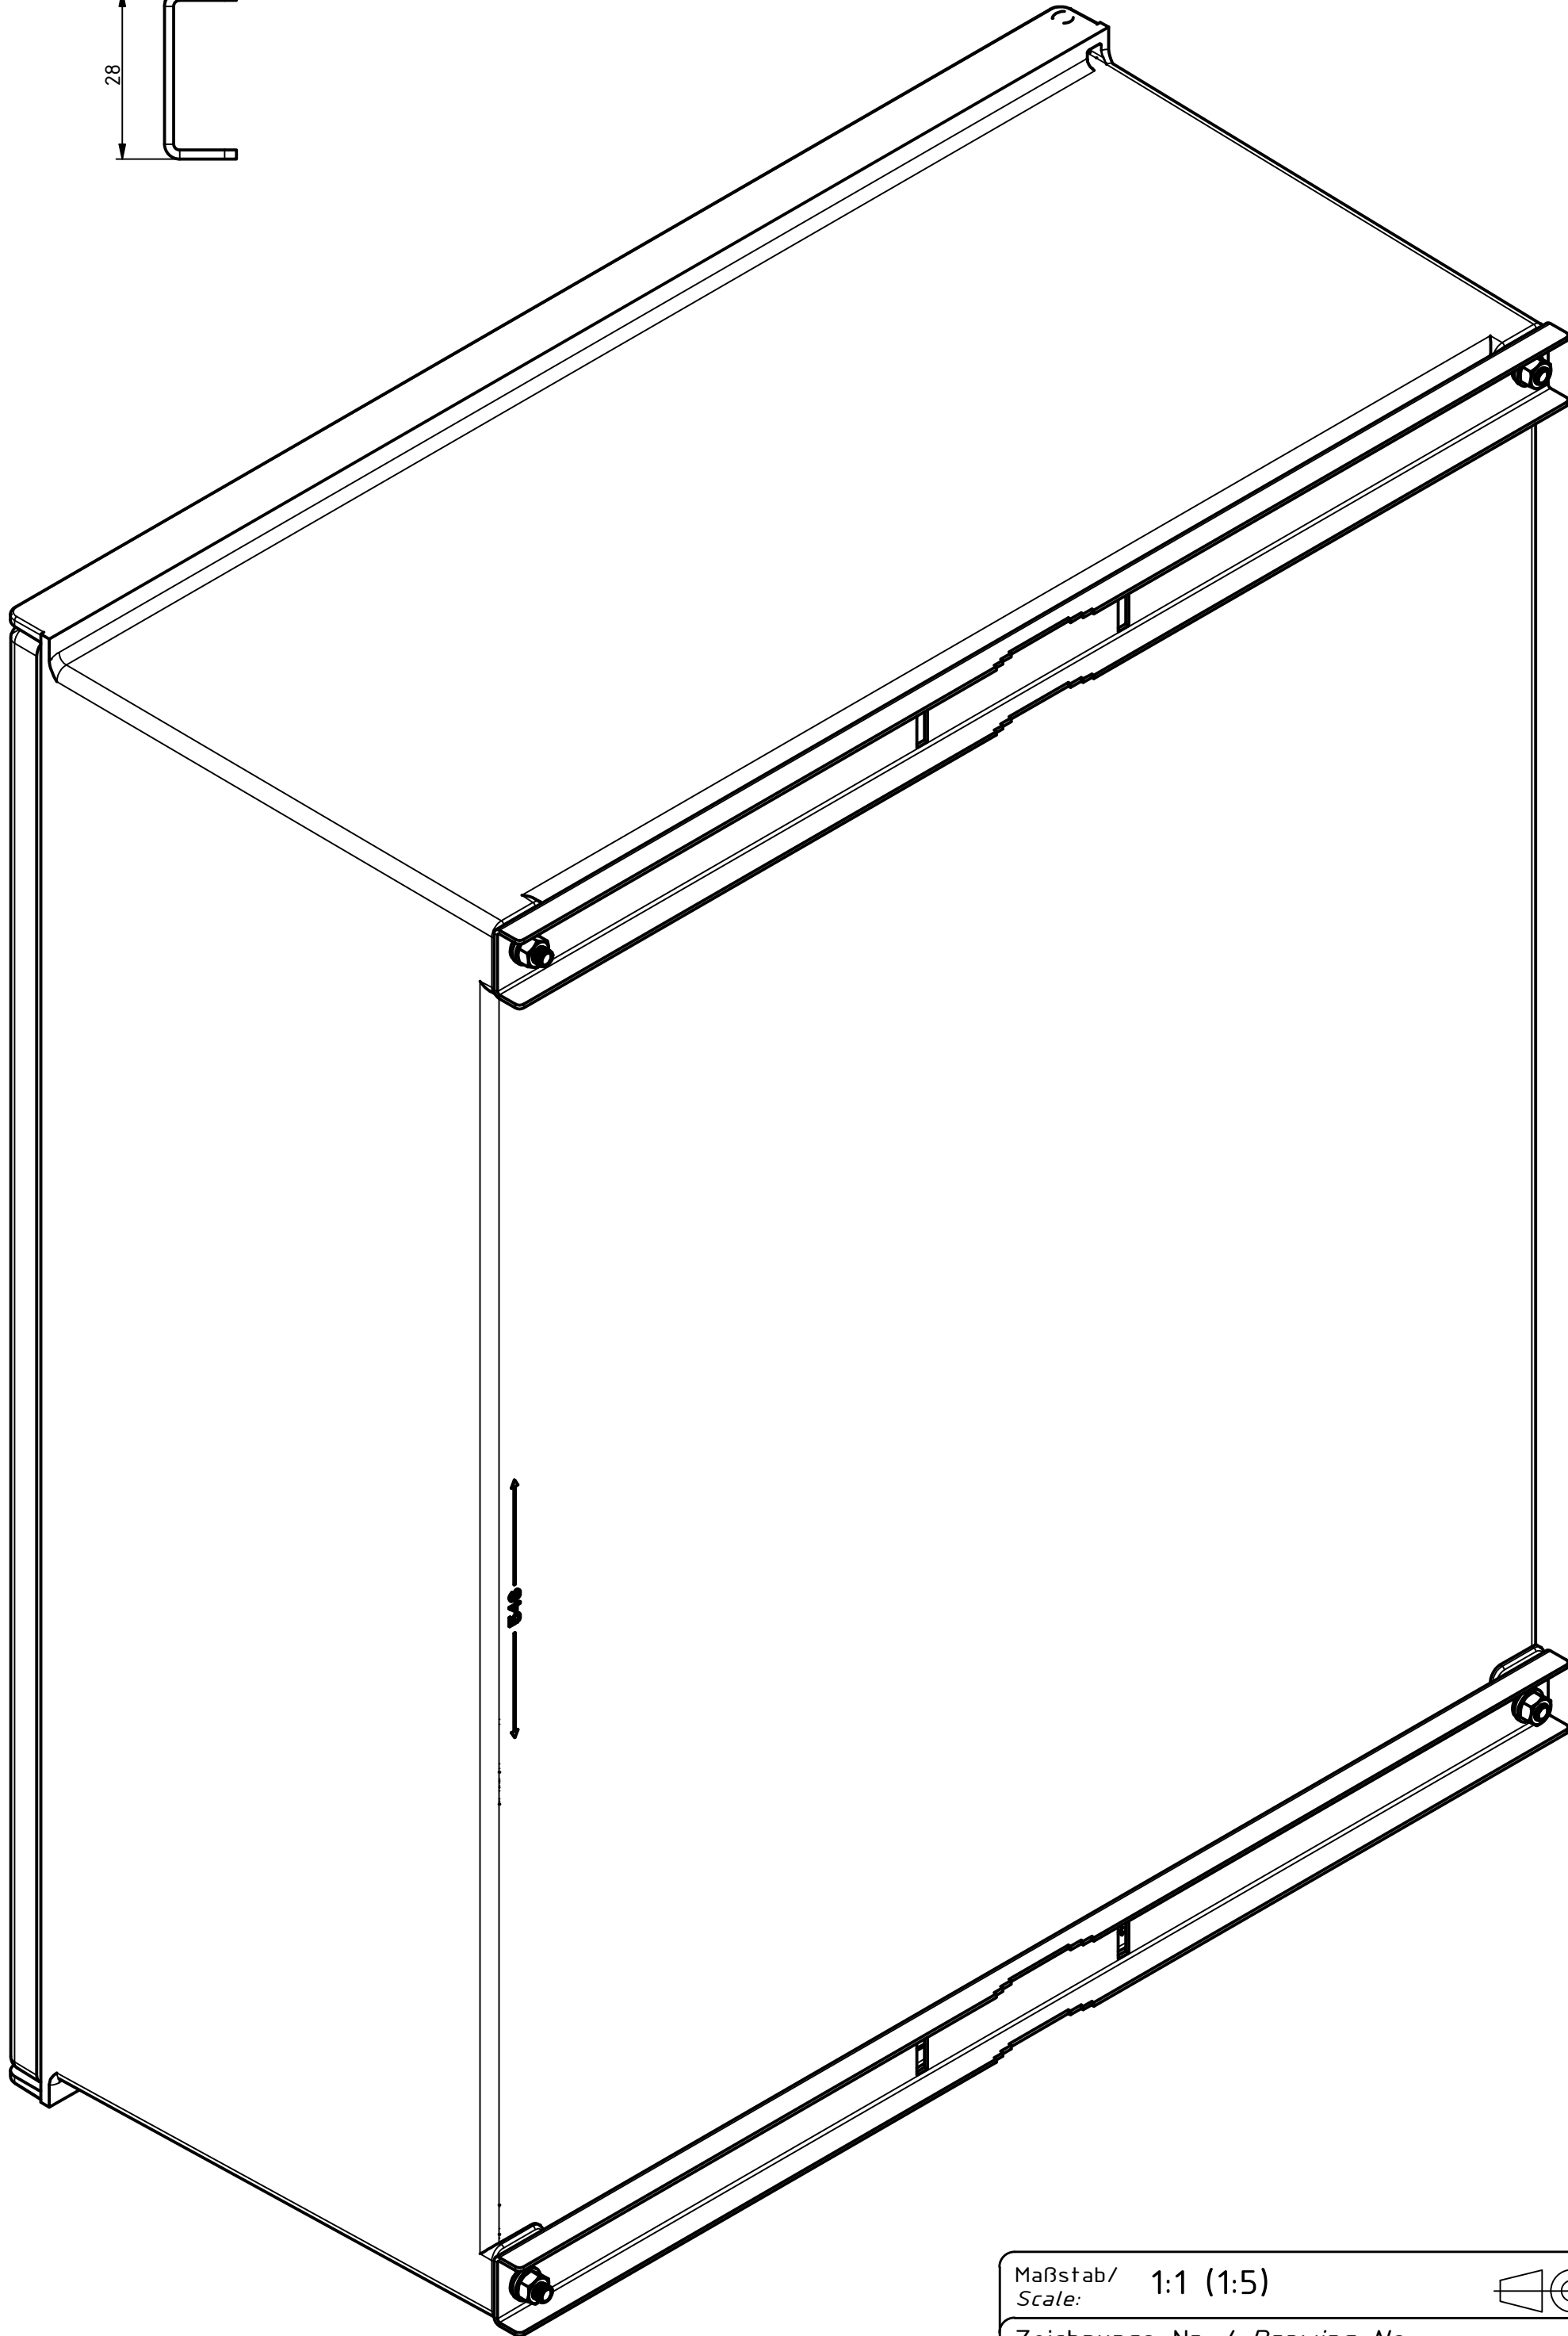


A

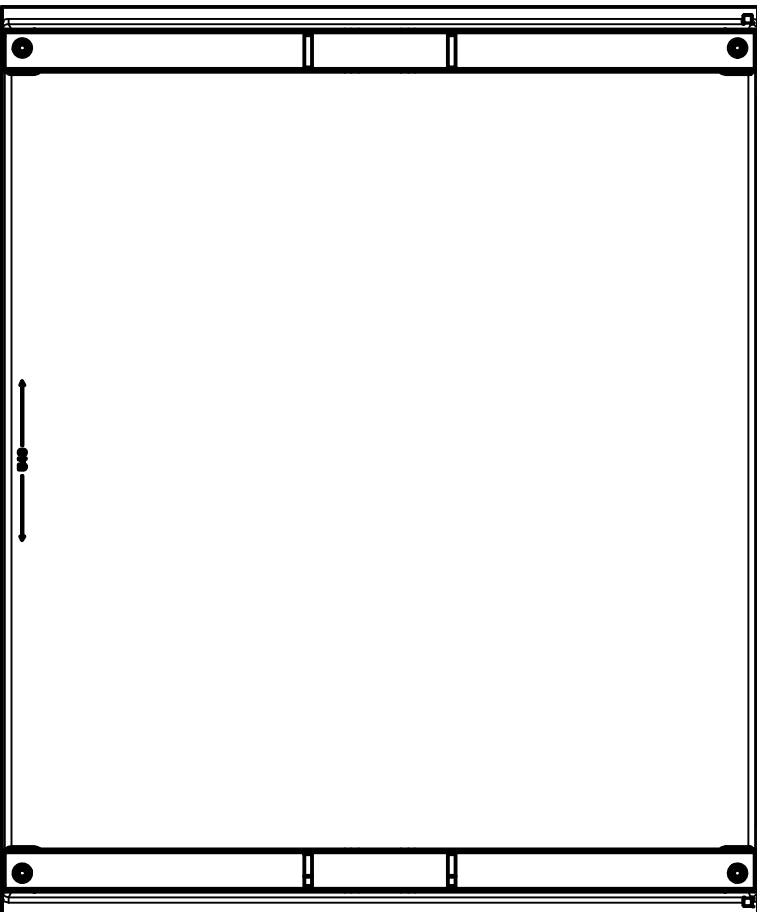


A

A-A (1 : 5)

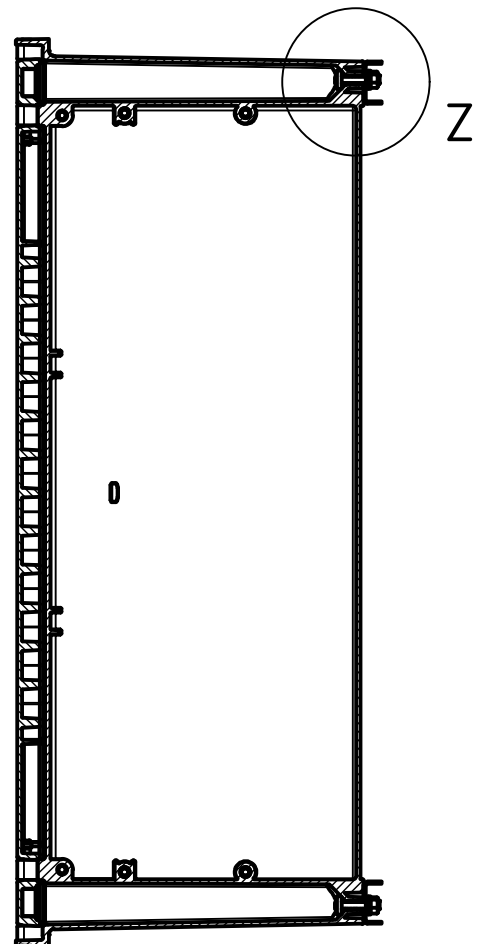

Z

Z (1 : 1)

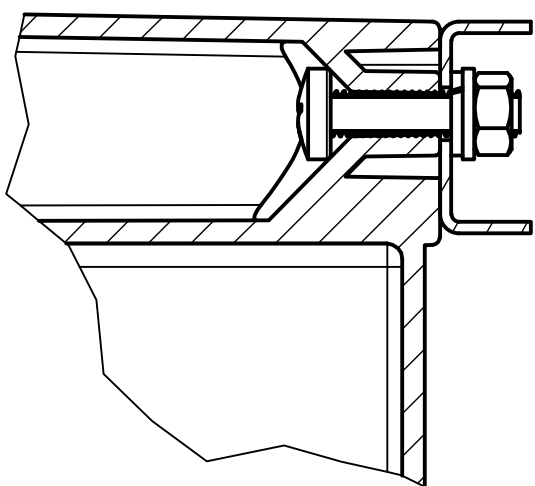

Befestigungsauswahl /
Fixing selection

Mastdurchmesser / Mast diameter	Befestigungsschelle Fixing clamp
40mm - 70mm	MH S 70-90
70mm - 95mm	MH S 90-110
95mm - 115mm	MH S 110-130
115mm - 135mm	MH S 130-150
135mm - 160mm	MH S 150-170
160mm - 180mm	MH S 170-190
180mm - 195mm	MH S 190-210

Maßstab/
Scale: 1:1 (1:5)

Zeichnungs-Nr. / Drawing-No.:
1K 5460.058.01

Artikel / Article:
Polysafe
PS MH-050
Katalogzg./Catalogue draw.

A.Nr./
Alt.No.: 2404522.idw
Datum/Date: 28.04.2021 AH