

DC - DC DIN RAIL MOUNTABLE POWER SUPPLY
INDUSTRIAL CONTROL EQUIPMENT**FEATURES**

- 4:1 WIDE INPUT RANGE
- SHORT CIRCUIT PROTECTION
- INTERNAL INPUT FILTER
- LOW PROFILE
- 3 YEARS WARRANTY

**MODEL LIST**

MODEL NO.	INPUT VOLTAGE	INPUT CURRENT (typ.) (max.)		OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)
Single Output Models								
DRD15-03	9-36 VDC	0.62 A	1.8 A	11.5 WATTS	+ 3.3 VDC	3.5 A	77%	79%
DRD15-05	9-36 VDC	0.70 A	1.9 A	13.5 WATTS	+ 5 VDC	2.7 A	78%	80%
DRD15-09	9-36 VDC	0.70 A	1.9 A	13.5 WATTS	+ 9 VDC	1.5 A	79%	81%
DRD15-12	9-36 VDC	0.76 A	2.1 A	15 WATTS	+ 12 VDC	1.25 A	80%	82%
DRD15-15	9-36 VDC	0.76 A	2.1 A	15 WATTS	+ 15 VDC	1 A	81%	83%
DRD15-24	9-36 VDC	0.76 A	2.1 A	15 WATTS	+ 24 VDC	0.63 A	81%	83%

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL						
Characteristics	Conditions		min.	typ.	max.	unit
Switching frequency	Vi nom, Io nom		100		200	KHz
Isolation voltage	Input-Output		1,500			VDC
Isolation resistance	Input-Output, @ 500VDC		100			MΩ
Ambient temperature	Operating at Vi nom		-40		+ 71	°C
Derating (see derating curve)	Vi nom, from +51°C to +71°C				2.5	% / °C
Storage temperature	Non operational		-40		+ 85	°C
Relative humidity	Vi nom, Io nom		20		95	% RH
Temperature coefficient	Vi nom, Io min				± 0.03	% / °C
MTBF	Bellcore Issue 6 @40°C, GB	3.3V		1,066,000		Hours
		5V		996,000		Hours
		9V		1,055,000		Hours
		12V		951,000		Hours
		15V		998,000		Hours
		24V		989,000		Hours
Altitude during operation	EN 62368-1				5,000	m
Dimension			L91 x W18 x D56.5			mm
Cooling	Free air convection					
Installation position	Vertical (other direction may derating using)					
Pollution degree			2			

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

INPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Input voltage range	Ta min ... Ta max, Io nom	9	24	36	VDC
No load input current	Vi nom, Io = 0			30	mA
Input voltage w/o damage	Io nom			40	VDC
Startup voltage	Io nom		8.5		VDC
Input filter	Pi type				

OUTPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Output voltage accuracy	Vi nom, Io max			± 1	%
Minimum load	Vi nom	0			%
Line regulation	Io nom, Vi min ... Vi max			± 1	%
Load regulation	Vi nom, Io min ... Io nom	3.3V		± 1.5	%
		other		± 1	%
Startup time	Vi nom, Io nom			50	ms
Transient recovery time	Vi nom, I ~ 0.5 Io nom			1	ms
Ripple & noise	Vi nom, Io nom, BW = 20MHz			100	mV
Power back immunity	Vi nom, Io nom	3.3V	5.0		VDC
		5V	7.5		VDC
		9V	15		VDC
		12V	18		VDC
		15V	22		VDC
		24V	35		VDC
Capacitor load	Vi nom, Io nom	3.3V, 5V		3,500	μF
		9V		2,200	μF
		12V, 15V		1,000	μF
		24V		470	μF
DC ON indicator threshold at start up (Green LED)	Vi nom, Io nom	3.3V	2.6	3.0	VDC
		5V	3.5	4.5	VDC
		9V	6.8	8.1	VDC
		12V	9	10.8	VDC
		15V	11	13.5	VDC
		24V	19.2	21.6	VDC
DC LOW indicator threshold after start up (Red LED)	Vi nom, Io nom	3.3V	2.6	3.0	VDC
		5V	3.5	4.5	VDC
		9V	6.8	8.1	VDC
		12V	9	10.8	VDC
		15V	11	13.5	VDC
		24V	19.2	21.6	VDC
Efficiency	Vi nom, Io nom, Po / Pi	Up to 83%, See model list and typ efficiency curve			

CONTROL AND PROTECTION

Characteristics	Conditions	min.	typ.	max.	unit
Input fuse		T3A / 63VDC internal			
Internal surge voltage protection	IEC 61000-4-5	Varistor			
Rated over load protection	Vi nom	110		165	%
Over voltage protection	Vi nom, 0.8 Io nom (Auto Recovery)	3.3V	3.8	4.3	VDC
		5V	5.75	6.5	VDC
		9V	10.35	11.7	VDC
		12V	14.4	16.2	VDC
		15V	17.25	19.5	VDC
		24V	28.8	32.4	VDC
Output short circuit		Current limited (Auto-recovery)			
Degree of protection		IP20			

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

APPROVALS AND STANDARDS


UL / cUL	UL 508
cTUVus	UL 62368-I
TUV	EN 62368-I
CE	BS EN / EN 61000-6-3, BS EN / EN 55032 Class B BS EN / EN 61000-6-2, BS EN / EN 55035, BS EN / EN 61000-4-2, BS EN / EN 61000-4-3, BS EN / EN 61000-4-4 BS EN / EN 61000-4-5, BS EN / EN 61000-4-6, BS EN / EN 61000-4-8, DD ENV / ENV 50204 BS EN / EN 61204-3, CISPR 32
Vibration resistance	meet IEC 60068-2-6 (Mounting on rail : 10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)
Shock resistance	meet IEC 60068-2-27 (15G, 11ms, 3 Axis, 6 Faces, 3 times for each Face)

PHYSICAL CHARACTERISTICS

Case size	91 x 18 x 56.5 mm (3.58 x 0.71 x 2.22 inches)
Case material	Plastic
Weight	65g
Packing	0.11kg ; 120pcs / 14.5kg / 2.28CUFT

MECHANISM & PIN CONFIGURATION

mm [inch]

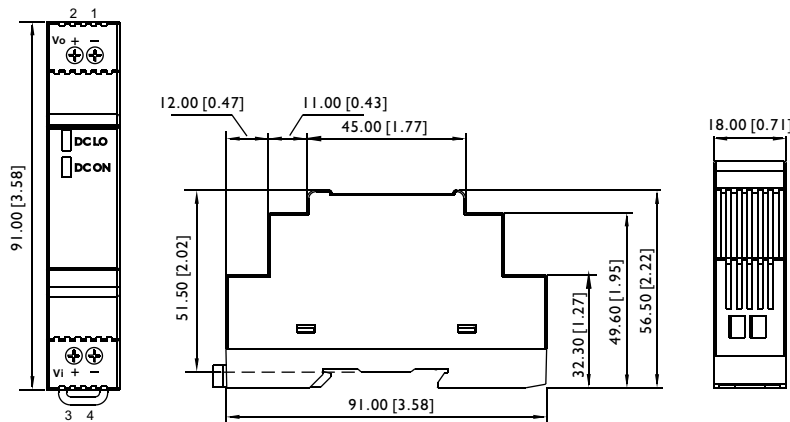

CONSTRUCTION

Easy snap-on mounting onto the DIN-Rail (TS35/7.5 or TS35/15), unit sits safely and firmly on the rail; no tools required even to remove

INSTALLATION


Ventilation / Cooling
Normal convection
All sides 25mm free space
For cooling recommended
Connector size range
AWG26-12 (0.2~2.5mm²) flexible / solid cable
-Connector can withstand torque at maximum 5 pound-inches.
4~5mm/m stripping at cable end recommends.
Use copper conductors only, 60/75 °C

GENERAL TOLERANCE		
0.00[0.00] - 30.00[1.18]	±0.30[0.01]	
30.00[1.18] - 120.00[4.72]	±0.50[0.02]	


PIN ASSIGNMENT

PIN NO	Designation		Description
1	OUT	-	Negative output terminal
2		+	Positive output terminal
3	IN	+	Positive input terminal
4		-	Negative input terminal
	OTHER	DC ON	Operation indicator LED
		DC LO	DC Low indicator LED

CIRCUIT SCHEMATIC

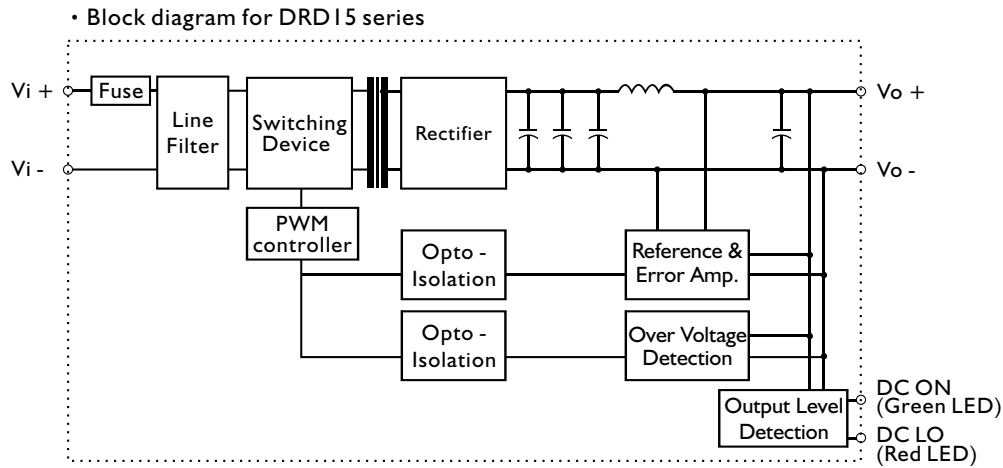

DERATING CURVE

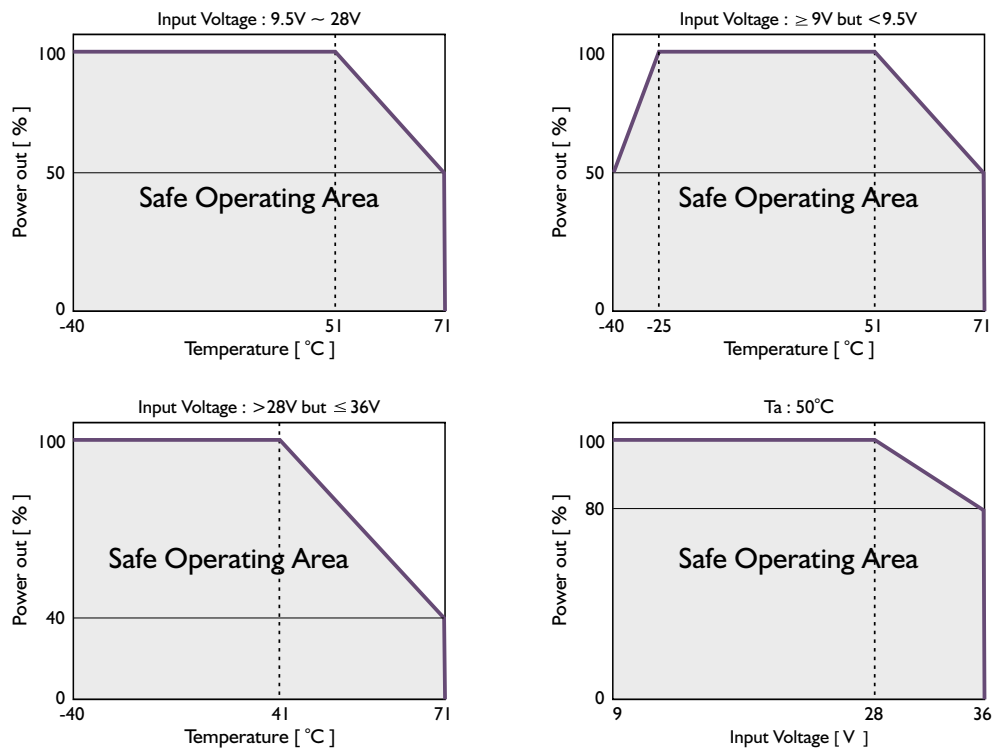

TYP. EFFICIENCY CURVE

