

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除本册子明确授权外, 否则禁止复制或传播。 未经授权复制或传播, 侵权者将承担法律责任。 本公司保留所有权利并保留解释权。

FOR-1755 Rev.1.8




2

3

4

5




6

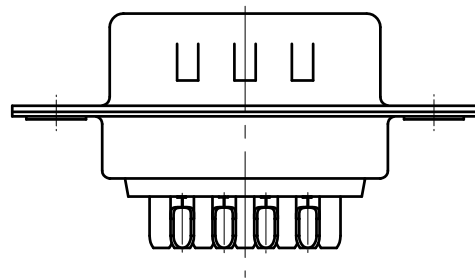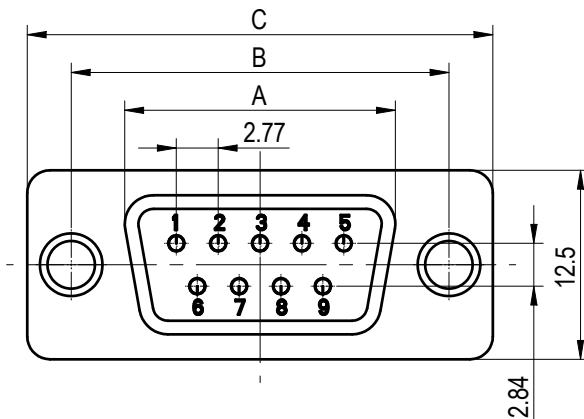

Dimension

Position	A±0.2	B±0.2	C±0.3
9	17.90	24.99	30.80
15	26.50	33.32	39.14
25	40.00	47.04	53.04
37	56.50	63.50	69.32

(Series Image-Reference Only)



NOTES:

1. Electrical characteristics:

1.1 Contact resistance: 20mΩ Max. Initial.

1.2 Dielectric withstanding voltage: 500V AC(rms) for 1 minute.

1.3 Insulation resistance: 1000MΩ Min.

2. Environment characteristics:

2.1.Temperature range: -40°C~+105°C.

3. Materials:

3.1 Insulator:PBT+Glass fiber

3.2 Shell:Steel

3.3 Contact:Copper alloy

4. Product number code:

DG1033 - 10 - X X X X X X X

Screw DIM. A
S: Standard(W/O nut)
1: 5.00 2: 3.00
3: 5.20 4: 4.80
5: 5.80 6: 4.00

Screw type
S: Standard(W/O nut)
1: CC type
2: CS type

Contact plating
6: Full tin 8: Full gold flash
0: Selective gold flash
J: Selective 5u" gold

Shell plating
N: Front Nickel,Back Tin

Housing color
B: Black W: White
U: Blue

Connector type
M: Male

No.of contacts
09,15,25,37

GENERAL TOLERANCE

X. ±0.60
X ±0.38
XX ±0.25



APPD: 兰春华 2023.07.31
CHKD: 陈招 2023.07.28

DRFT: 唐本恒 2023.07.27

DRFT: 唐本恒 2023.07.27

MATERIAL:

MAT NO./REV: / 00

NAME

DG1033-10-XXXXXXX

DRAWING NO.

200035036

TYPE

CUSTOMER DRAWING

SURFACE/COLOR:

MAT STATUS: 批量

NAME

DG1033-10-XXXXXXX

DRAWING NO.

200035036

TYPE

CUSTOMER DRAWING

DRAWING STATUS

已发布

SCALE

1:1

SHEET

1/1

00	ECN	DESCRIPTION
REV	ECN	DESCRIPTION

DRFT	DATE
唐本恒	2023.07.27

DRFT	DATE
唐本恒	2023.07.27

DRAWING NO.	TYPE
200035036	CUSTOMER DRAWING

DRAWING STATUS	SCALE	SHEET
已发布	1:1	1/1

1

2

3

4

5

6