
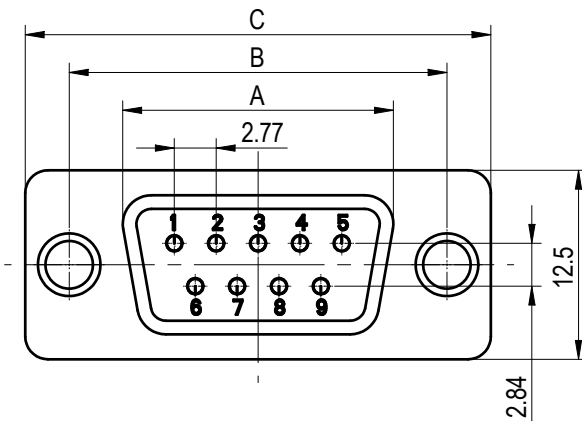



Dimension

Position	A±0.2	B±0.2	C±0.3
9	17.90	24.99	30.80
15	26.50	33.32	39.14
25	40.00	47.04	53.04
37	56.50	63.50	69.32


(Series Image-Reference Only)



Standard



CC TYPE



CS TYPE

NOTES:

1. Electrical characteristics:

1.1 Contact resistance: 20mΩ Max. Initial.

1.2 Dielectric withstanding voltage: 500V AC(rms) for 1 minute.

1.3 Insulation resistance: 1000MΩ Min.

2. Environment characteristics:

2.1.Temperature range: -40°C~+105°C.

3. Materials:

3.1 Insulator:PBT+Glass fiber

3.2 Shell:Steel

3.3 Contact:Copper alloy

4. Product number code:

DG1033 - 10 - X X X X X X X

Screw DIM. A

S: Standard(W/O nut)

1: 5.00 2: 3.00

3: 5.20 4: 4.80

5: 5.80 6: 4.00

Screw type

S: Standard(W/O nut)

1: CC type

2: CS type

Contact plating

6: Full tin 8: Full gold flash

0: Selective gold flash

J: Selective 5u" gold

Shell plating

N: Front Nickel,Back Tin

Housing color

B: Black W: White

U: Blue

Connector type

M: Male

No.of contacts

09,15,25,37

GENERAL TOLERANCE

X. ±0.60
X ±0.38
XX ±0.25

APPD: 兰春华 2023.07.31

CHKD: 陈招 2023.07.28

DRFT: 唐本恒 2023.07.27

A4 (inch)

MATERIAL:

MAT NO./REV:

SURFACE/COLOR:

MAT STATUS: 批量

NAME

DG1033-10-XXXXXX

DRAWING NO.

200035036

TYPE

CUSTOMER DRAWING

DRAWING STATUS

已发布

SCALE

1:1

SHEET

1/1

00			唐本恒	2023.07.27
REV	ECN	DESCRIPTION	DRFT	DATE