










Transfer or duplication of this document, as well as the utilization or reproduction of its contents without the prior written consent of DEGSON, is strictly prohibited. 未经授权复制或传播本文件内容，或未经书面许可擅自使用或复制其内容，均属于侵权行为，公司将依法追究法律责任。

[Female]



[Male]



Dimension					
Position	A±0.2	B±0.2	C±0.3	D	E
15	17.90	24.99	30.80	16.33	2.29
26	26.50	33.32	39.14	24.66	2.29
44	40.00	47.04	53.04	38.38	2.29
62	56.50	63.50	69.32	54.84	2.14
78	54.30	61.00	67.04	52.34	2.14

NOTES:

- Electrical characteristics:
 - 1.1 Contact resistance: 20mΩ Max. Initial.
 - 1.2 Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
 - 1.3 Insulation resistance: 1000MΩ Min.
- Environment characteristics:
 - 2.1 Temperature range: -40°C~+105°C.
- Materials
 - 3.1 Insulator: Thermoplastic.
 - 3.2 Contact: Copper alloy.
 - 3.3 Shell: Steel.
 - 3.4 Screw: Copper alloy.
- Product number code:

DG1035 - X X X X X X X X

Screw DIM. A
S: Standard(W/O nut)
1: 3.00 2: 4.00
3: 4.50 4: 5.00
5: 5.50 6: 5.80

Screw type
S: Standard(W/O nut)
1: CC type
2: CS type





Contact plating
8: Full gold flash
Si: Selective gold flash

Shell plating
T: Front & Back shell tin
N: Front shell nickel,
Back shell tin

Housing color
B: Black
W: White
U: Blue

Connector type
M: Male
F: Female

No of contacts
15: 15pos. 26: 26pos.
44: 44pos. 62: 62pos.
78: 78pos.

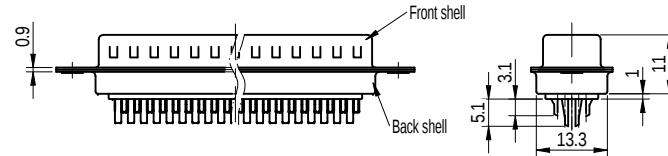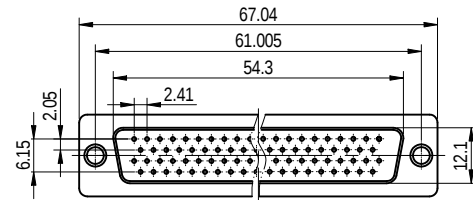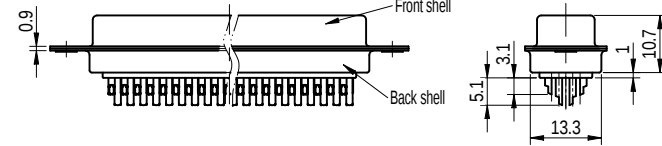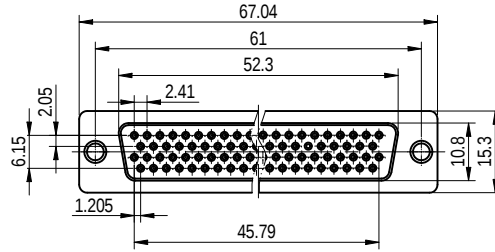

(Series Image-Reference Only)

GENERAL TOLERANCE				DEGSON		MATERIAL:		SURFACE/COLOR:	
X	±0.60	APPD:	兰春华	2023.07.31	NAME:	MAT NO./REV:	/ 00	MAT STATUS:	批量
X	±0.38	CHKD:	陈超	2023.07.31	DG1035-XXXXXX				
XX	±0.25	DWFT:	唐本恒	2023.07.28	DRAWING NO.	200035040	TYPE	CUSTOMER DRAWING	DRAWING STATUS
				唐本恒	2023.07.28	1/1		2:1	1/1

REV	ECN	DESCRIPTION	DATE	00	2023.07.28	唐本恒	1/1
REV	ECN	DESCRIPTION	DATE	00	2023.07.28	唐本恒	1/1