
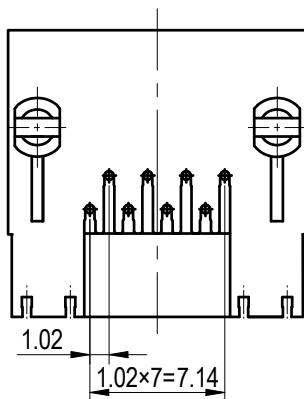
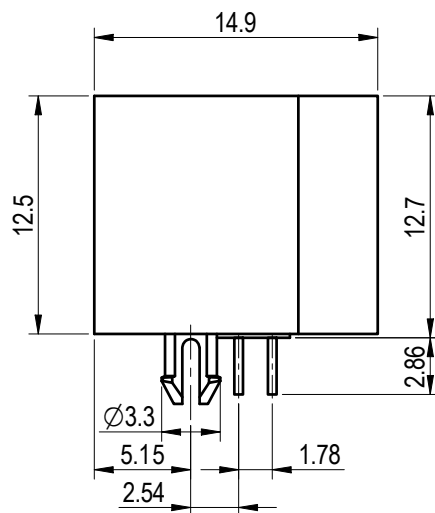


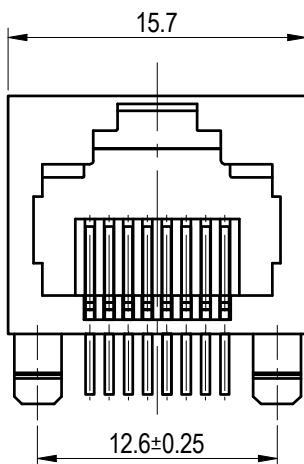

NOTES:

1. Electrical characteristics:


- 1.1 Contact resistance: 50mΩ Max. Initial.
- 1.2 Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
- 1.3 Insulation resistance: 1000MΩ Min.
- 1.4 Rated current: 1.5A.

2. Environment characteristics:

- 2.1. Temperature range: -40°C~+85°C.

3. Materials:

- 3.1 Terminal: Phosphorized copper Gold plating on nickel substrate≥1u.
- 3.2 Rubber core: PBT, black, fire-retardant.
- 4. Products meet the latest RoHS environment requirements.

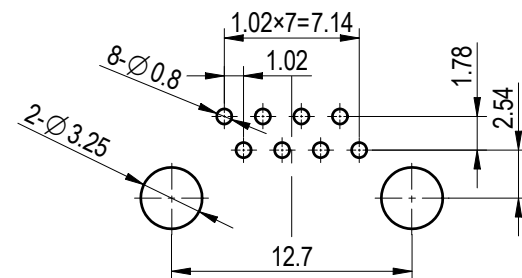

PCB LAYOUT

GENERAL TOLERANCE

X.	±0.60
.X	±0.38
.XX	±0.25



APPD:	兰春华	2023.08.14
CHKD:	陈招	2023.08.14

DRFT:	唐本恒	2023.08.14
-------	-----	------------

MATERIAL:	SURFACE/COLOR:			
MAT NO./REV:	/ 00			
NAME	DG1128-11-S8B8P-3A			
DRAWING NO.	200035075	TYPE	CUSTOMER DRAWING	DRAWING STATUS
				已发布
			SCALE	2:1
				SHEET 1/1

00	REV	ECN	DESCRIPTION	DRFT	DATE
				唐本恒	2023.08.14