


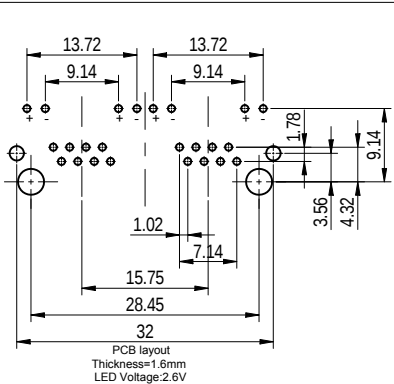
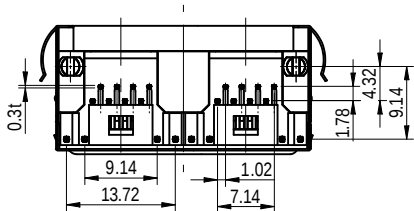


Transfer or duplication of this document, as well as the utilization or reproduction of its contents are prohibited without explicit authorization by DEGSON. All rights reserved for patent.
复制或再版此文件, 以及利用或再版其内容, 均须经 DEGSON 公司书面许可, 未经授权, 擅自复制或再版, 均属侵权行为, 公司将依法追究。保留所有权利。

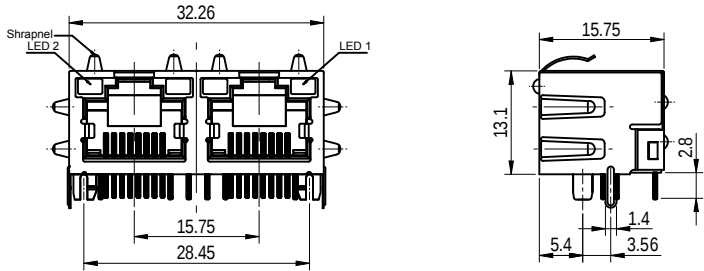

- Notes:
- Electrical Characteristics:
 - Contact Resistance: 20mΩ Max.
 - Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
 - Insulation Resistance: 1000MΩ Min.
 - Current Rating:1.5A.
 - Voltage Rating:150V AC rms.
 - Environment Characteristics:
 - Temperature: -40°C~+85°C.
 - Materials:
 - Contact Material: Copper Alloy.
 - Contact Plating: Selective Gold Flash.
 - Insulator Materials: PBT,UL94-V0.
 - Product Number Code:
DG1129-04-X X X X - X X
- LED Type
1: See Table
2: See Table
- Shell Type
S:W/ Shrapnel
X:W/O Shrapnel
- Housing Materials
P:PBT
- Contact Plating
0:Selective Gold Flash
J:Selective 6u" Gold
5:Selective 15u" Gold
3:Selective 30u" Gold
- Housing Color
B:Black
- No.Of Contacts
8:8p8c
- Connector Type
S:Socket

TYPE	Contact Plating				Shell Type (Shrapnel)	LED TABLE
	G/F	6u"	15u"	30u"		
1	W/	W/	W/O	W/	W/	TABLE1
2	W/	W/	W/	W/	W/ or W/O	TABLE2
3	W/	W/	W/O	W/	W/	TABLE3
4	W/	W/	W/O	W/O	W/ or W/O	TABLE4
5	W/	W/O	W/O	W/O	W/	TABLE5
6	W/O	W/O	W/O	W/O	W/	TABLE6
7	W/	W/O	W/O	W/O	W/	TABLE7
8	W/O	W/O	W/O	W/	W/	TABLE8

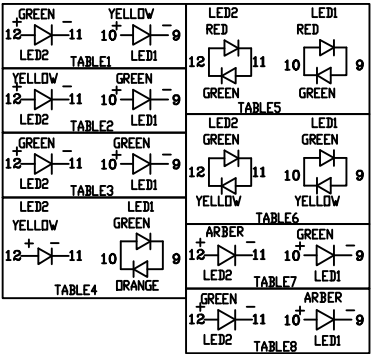

(Series Image-Reference Only)

GENERAL TOLERANCE				DEGSON		MATERIAL:		SURFACE/COLOR:	
X	±0.60			APPD: 兰春华	2023.08.10	MAT NO./REV:	/ 00		
X	±0.38			CHKD: 陈超	2023.08.10	NAME:	DG1129-04-XXXXX-XX		
XX	±0.25			DRAFT: 唐本恒	2023.08.10	DRAWING NO.	200035073	TYPE	CUSTOMER DRAWING
REV	ECN	DESCRIPTION		DFT	DATE	DRAWING STATUS	已发布	SCALE	2:1
00						SHEET	1/1		