

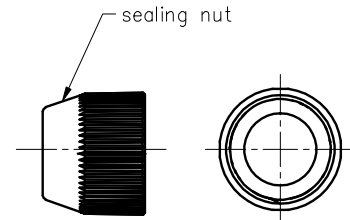









REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES:

- 1.Rated voltage/current :10Vac /1A
- 2.Insulation resistance: >100M Ω
- 3.Insulation plastic:Engineering plastic
- 4.Operating temperature: -20°C~+105°C
- 5.Cable range $\varnothing 6.4\text{mm} \sim \varnothing 7.0\text{mm}$
- 6.RoHS Compliance
- 7.Tolerance: .x ± 0.25
.xx ± 0.1
 $\angle \pm 1^\circ$

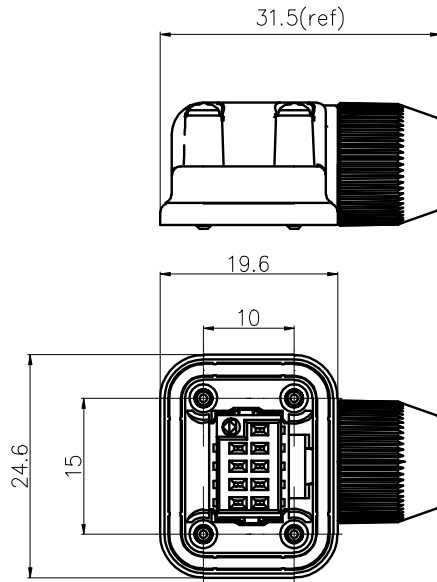

PART NO.:
24030000008

APPD:

CHKD:

DRFT: GQ 2019.03.29



THIRD ANGLE PROJECTION



宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DGFA9S-B1-00A(H)

TITLE: CUSTOMER DRAWING	REV	D0-1
DRAWING NO.: DGFA9S-B1-E01	SHEET	1/1
MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1