

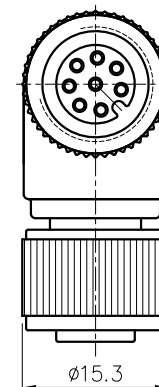
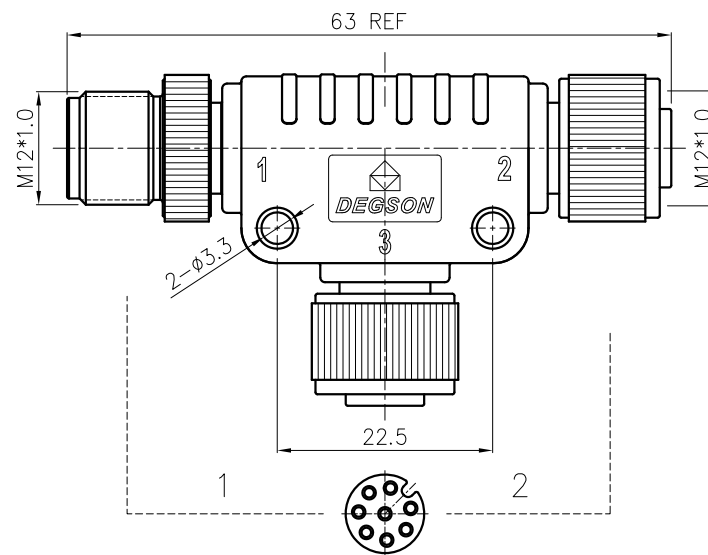


REVISION RECORD


REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

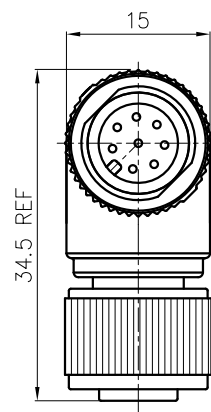


Circuit diagram:

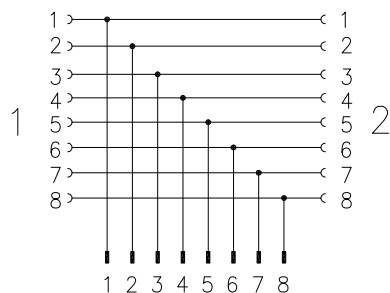

Female(Front view)



Male(Front view)



1	white
2	brown
3	Green
4	yellow
5	gray
6	pink
7	blue
8	red
NO.	Color

NOTES:

- 1.RoHS Compliance,
- 2.The Code direction is shown as diagram,
- 3.Housing material: PU(Color: black),
- 4.Contact body material: PU(Color: black),
- 5.Contact material: Copper alloy,(plating: gold)
- 6.O Ring material: Silicone,(Color: green)
- 7.Screw material: Zinc alloy (plating: Ni),

Dimensional tolerance (mm)

≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150
±0.20	±0.30	±0.50	±0.70	±1.00

Technique parameter

Rated voltage	30V
Rated current	2A
Insulation resistance	≥100MΩ
Withstanding voltage	800V AC
Operating temperature	-25°C~+85°C
Levels of protection	IP67
Cable OD	/

PART NO.:
FTM12A08FM12A08MK80200宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

APPD:

NAME:

CHKD:

FT-M12A-08F-M12A-08M-K8-0200

DRFT: WYM 2019/05/23

TITLE: ASSEMBLY DRAWING

REV TO-1


DRAWING NO.: 20000432

SHEET 1/1

MM (INCH)

DO NOT SCALE DRAWING

SCALE 1:1



THIRD ANGLE PROJECTION