

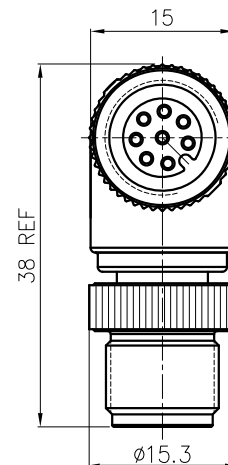
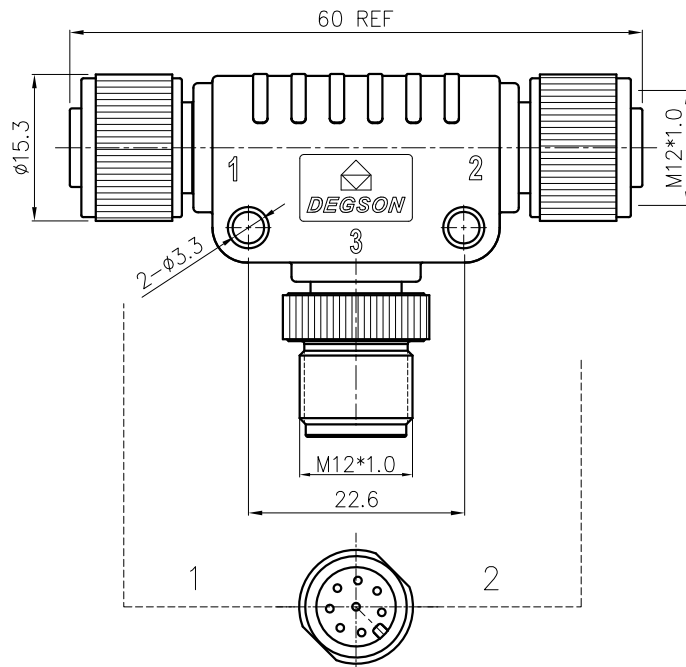


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

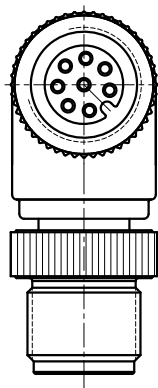

Circuit diagram:

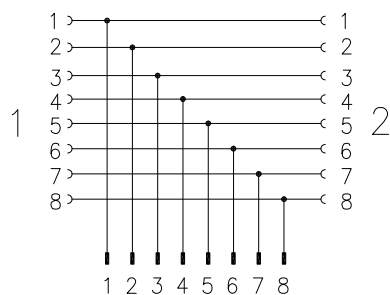


NOTES:

- 1.RoHS Compliance,
- 2.The Code direction is shown as diagram,
- 3.Housing material: PU(Color: black),
- 4.Contact body material: PU(Color: black),
- 5.Contact material: Copper alloy,(plating: gold)
- 6.O Ring material: Silicone,(Color: green)
- 7.Screw material: Zinc alloy (plating: Ni),


Technique parameter

Rated voltage	30V
Rated current	2A
Insulation resistance	≥100MΩ
Withstanding voltage	800V AC
Operating temperature	-25℃~+85℃
Levels of protection	IP67
Cable OD	/

Female(Front view)



Male(Front view)



1	white
2	brown
3	Green
4	yellow
5	gray
6	pink
7	blue
8	red
NO.	Color

Dimensional tolerance (mm)


≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150
±0.20	±0.30	±0.50	±0.70	±1.00

PART NO.:
FTM12A08MM12A08FQ0200

APPD:

CHKD:

DRFT: WYM 2019/05/23



THIRD ANGLE PROJECTION



NINGBO DEGSON ELECTRICAL CO., LTD

NAME:

FT-M12A-08M-M12A-08F-Q-0200

TITLE:

ASSEMBLY DRAWING

REV

T0-1

DRAWING NO.:

20000433

MM
(INCH)

DO NOT SCALE DRAWING

SHEET

1/1

SCALE

1:1