

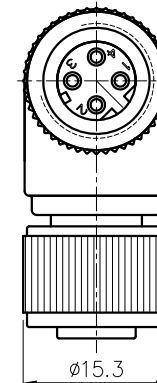
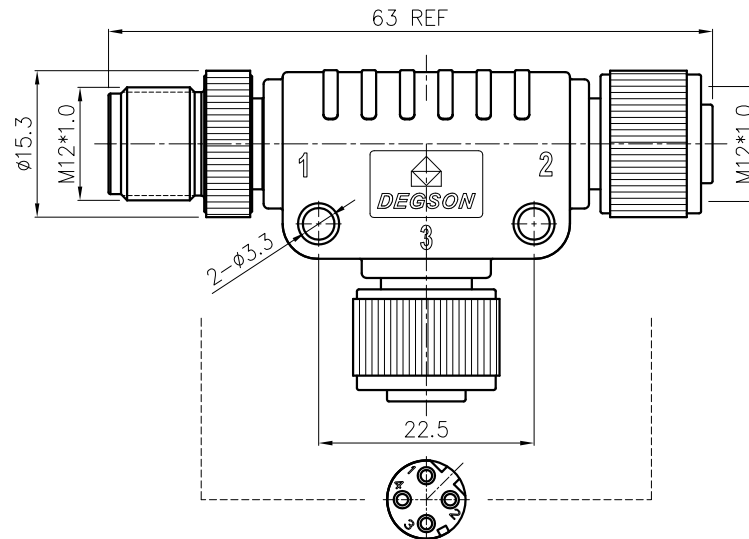


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

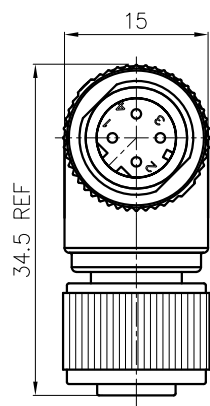

Circuit diagram:




NOTES:

- 1.RoHS Compliance,
- 2.The Code direction is shown as diagram,
- 3.Housing material:PU(Color:black),
- 4.Contact body material:PU(Color:black),
- 5.Contact material:Copper alloy,(plating:gold)
- 6.O Ring material:Silicone,(Color:green)
- 7.Screw material:Zinc alloy (plating:Ni),

Technique parameter


Rated voltage	250V
Rated current	4A
Insulation resistance	≥100MΩ
Withstanding voltage	1500 AC
Operating temperature	-25℃~+85℃
Levels of protection	IP67
Cable OD	/

Female(Front view)



D-code

Male(Front view)



D-code

1	brown
2	white
3	blue
4	black
NO.	Color

Dimensional tolerance (mm)


≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150
±0.20	±0.30	±0.50	±0.70	±1.00

PART NO.:
FTM12D04FM12D04MK40200

APPD:

CHKD:

DRFT: WYM 2019/05/23



THIRD ANGLE PROJECTION

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME:

FT-M12D-04F-M12D-04M-K4-0200

TITLE:

ASSEMBLY DRAWING

REV

TO-1

DRAWING NO.:

20000529

SHEET

1/1

MM
(INCH)

DO NOT SCALE DRAWING

SCALE

1:1